

TOSHIBA

TPS723A

TOSHIBA PHOTODIODE SILICON PIN


TPS723A

PIN PHOTODIODE FOR FIBER OPTIC SYSTEM

Unit in mm


- Small Dark Current : $I_D = 0.5\text{nA}$ (TYP.)
- High Sensitivity : $S_f = 0.37\text{A/W}$ (TYP.)
- High speed application is possible : $t_r, t_f = 100\text{ns}$ (TYP.)

PIN CONNECTION



MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Reverse Voltage	V_R	30	V
Power Dissipation	P_D	150	mW
Operating Temperature	T_{opr}	-30~80	°C
Storage Temperature	T_{stg}	-40~100	°C

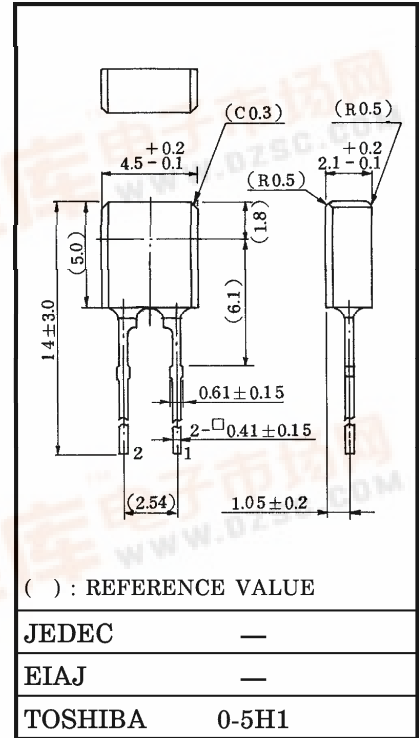

OPTICAL-ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Dark Current	I_D	$V_R = 10\text{V}$	—	0.5	8.0	nA
Fiber Coupled Sensitivity (Note)	S_f	$V_R = 10\text{V}, \lambda = 660\text{nm}, P_f = 1\mu\text{W}$	0.32	0.37	—	A/W
Peak Sensitivity Wavelength	λ_p	$V_R = 10\text{V}$	—	840	—	nm
Capacitance	C_T	$V_R = 10\text{V}, f = 1\text{MHz}$	—	10	—	pF
Switching Time	Rise Time	$V_R = 10\text{V}, R_L = 1\text{k}\Omega$	—	100	—	ns
	Fall Time		—	100	—	

(Note) Using plastic fiber cable, Fiber length=0.5m, Core Diameter=980 μm , NA=0.5

PRECAUTION




Please be careful of the followings.

1. Soldering temperature: 260°C MAX. Soldering time : 3sec MAX.
(Soldering portion of lead : up to 2.5mm from the body of the device)
2. If the lead is formed, the lead should be formed at a distance of 2.5mm from the body of the device. Soldering shall be performed after lead forming.


961001EAA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.



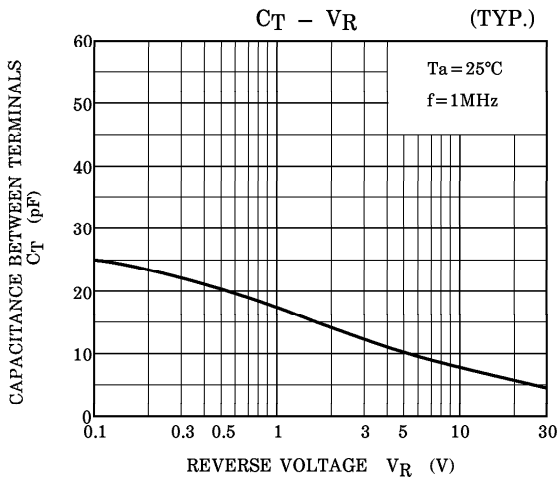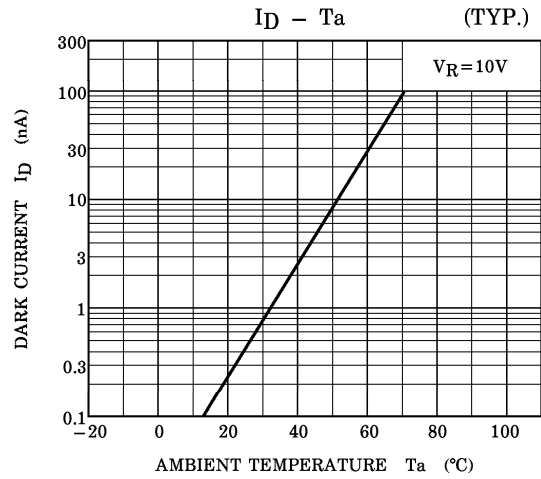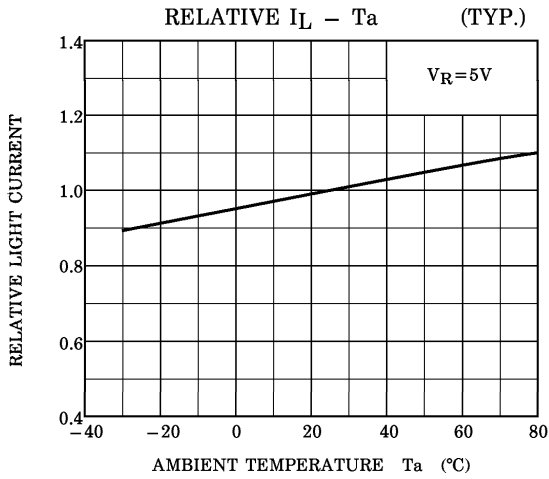

DIRECTIONAL SENSITIVITY CHARACTERISTIC (TYP.)
($T_a=25^\circ C$)

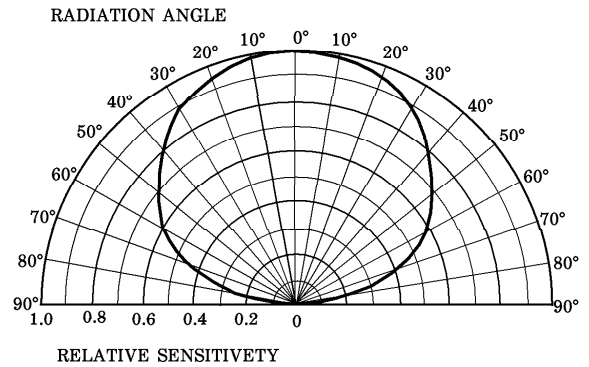

961001EAA2'

- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.