

- Low $r_{DS(on)}$. . . 0.4 Ω Typ
- High-Voltage Output . . . 60 V
- Pulsed Current . . . 3 A Per Channel
- Fast Commutation Speed

description

The TPIC5621L is a monolithic logic-level power DMOS-transistor array that consists of six N-channel enhancement-mode DMOS transistors, three of which are configured with a common source.


The TPIC5621L is offered in a wide-body surface-mount (DW) package and is characterized for operation over the case temperature range of -40°C to 125°C .

DW PACKAGE
(TOP VIEW)

DRAIN4	1	20	SOURCE1
GATE4	2	19	NC
SOURCE4/GND	3	18	GATE1
SOURCE5/GND	4	17	DRAIN1
DRAIN5	5	16	DRAIN2
GATE5	6	15	SOURCE2
SOURCE5/GND	7	14	GATE2
SOURCE6/GND	8	13	DRAIN3
GATE6	9	12	GATE3
DRAIN6	10	11	SOURCE3

NC – No internal connection

schematic

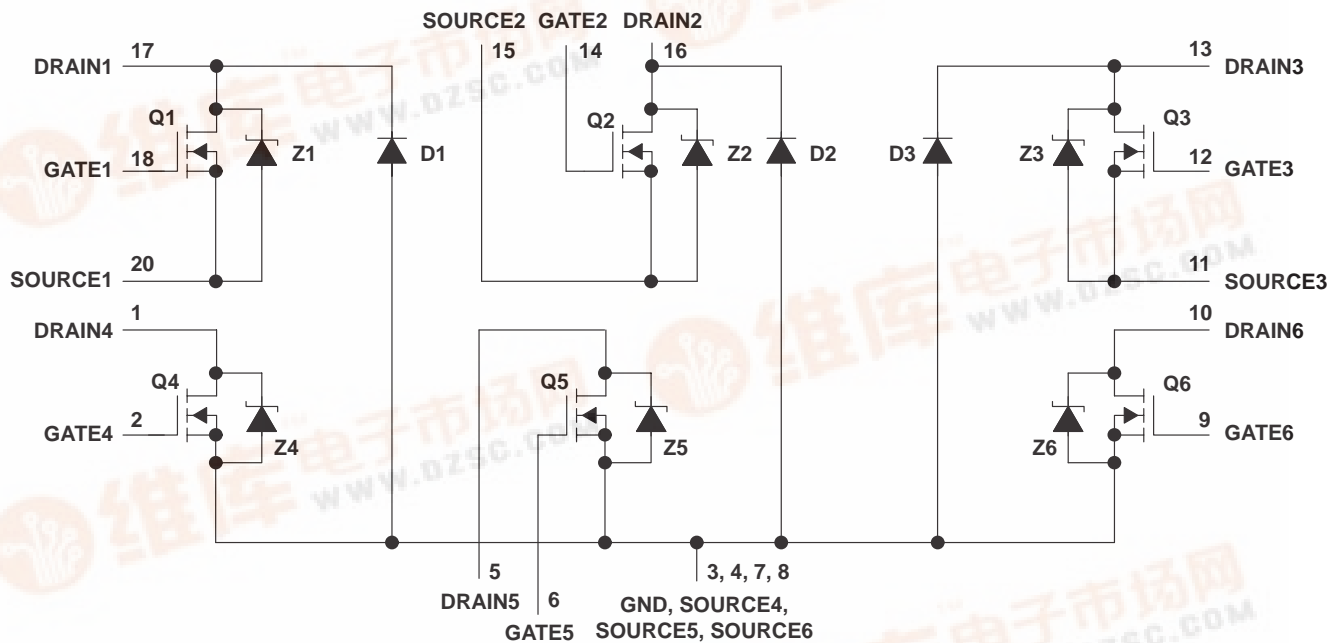

TPIC5621L

SIX-OUTPUT POWER DMOS ARRAY

SLIS033 – JUNE 1994

absolute maximum ratings over operating case temperature range (unless otherwise noted)[†]

Drain-to-source voltage, V_{DS}	60 V
Source-to-GND voltage (Q1, Q2, and Q3)	100 V
Drain-to-GND voltage (Q1, Q2, and Q3)	100 V
Drain-to-GND voltage (Q4, Q5, and Q6)	60 V
Gate-to-source voltage range, V_{GS}	± 20 V
Continuous drain current, each output, $T_C = 25^\circ\text{C}$	1 A
Continuous source-to-drain diode current, $T_C = 25^\circ\text{C}$	1 A
Pulsed drain current, I_{max} , $T_C = 25^\circ\text{C}$ (each output, see Note 1 and Figure 15)	3 A
Single-pulse avalanche energy, E_{AS} , $T_C = 25^\circ\text{C}$ (see Figures 4, 15 and 16)	18 mJ
Continuous total dissipation (see Figure 15)	See Dissipation Rating Table
Operating virtual junction temperature range, T_J	-40°C to 150°C
Operating case temperature range, T_C	-40°C to 125°C
Storage temperature range	-65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: Pulse duration = 10 ms and duty cycle = 2%.

DISSIPATION RATING TABLE

PACKAGE	$T_C \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_C = 25^\circ\text{C}$	$T_C = 125^\circ\text{C}$ POWER RATING
DW	1389 mW	11.1 mW/ $^\circ\text{C}$	279 mW

TPIC5621L SIX-OUTPUT POWER DMOS ARRAY

SLIS033 – JUNE 1994

electrical characteristics, $T_C = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{(BR)DSX}$ Drain-to-source breakdown voltage	$I_D = 250\ \mu\text{A}$, $V_{GS} = 0$	60			V
$V_{GS(th)}$ Gate-to-source threshold voltage	$I_D = 1\ \text{mA}$, See Figure 5 $V_{DS} = V_{GS}$	1.5	1.85	2.2	V
$V_{(BR)}$ Reverse drain-to-GND breakdown voltage (across D1, D2, and D3)	Drain-to-GND current = $250\ \mu\text{A}$	100			V
$V_{DS(on)}$ Drain-to-source on-state voltage	$I_D = 1\ \text{A}$, See Notes 2 and 3 $V_{GS} = 5\ \text{V}$		0.4	0.48	V
$V_{F(SD)}$ Forward on-state voltage, source-to-drain	$I_S = 1\ \text{A}$, $V_{GS} = 0$ (Z1, Z2, Z3, Z4, Z5, Z6), See Notes 2 and 3 and Figure 12		0.9	1.1	V
V_F Forward on-state voltage, GND-to-drain	$I_D = 1\ \text{A}$ (D1, D2, D3), See Notes 2 and 3		4.6		V
I_{DSS} Zero-gate-voltage drain current	$V_{DS} = 48\ \text{V}$, $V_{GS} = 0$	$T_C = 25^\circ\text{C}$	0.05	1	μA
		$T_C = 125^\circ\text{C}$	0.5	10	
I_{GSSF} Forward gate current, drain short circuited to source	$V_{GS} = 16\ \text{V}$, $V_{DS} = 0$		10	100	nA
I_{GSSR} Reverse gate current, drain short circuited to source	$V_{SG} = 16\ \text{V}$, $V_{DS} = 0$		10	100	nA
I_{lkg} Leakage current, drain-to-GND	$V_{DGND} = 48\ \text{V}$ (D1, D2, D3)	$T_C = 25^\circ\text{C}$	0.05	1	μA
		$T_C = 125^\circ\text{C}$	0.5	10	
$r_{DS(on)}$ Static drain-to-source on-state resistance	$V_{GS} = 5\ \text{V}$, $I_D = 1\ \text{A}$, See Notes 2 and 3 and Figures 6 and 7	$T_C = 25^\circ\text{C}$	0.4	0.48	Ω
		$T_C = 125^\circ\text{C}$	0.65	0.68	
g_{fs} Forward transconductance	$V_{DS} = 15\ \text{V}$, $I_D = 0.5\ \text{A}$, See Notes 2 and 3 and Figure 9	1	1.29	1.45	S
C_{iss} Short-circuit input capacitance, common source	$V_{DS} = 25\ \text{V}$, $f = 1\ \text{MHz}$, $V_{GS} = 0$, See Figure 11		190	240	pF
C_{oss} Short-circuit output capacitance, common source			100	125	
C_{rss} Short-circuit reverse transfer capacitance, common source			40	50	

NOTES: 2. Technique should limit $T_J - T_C$ to 10°C maximum.

3. These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts.

source-to-drain and GND-to-drain diode characteristics, $T_C = 25^\circ\text{C}$

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
t _{rr}	Reverse recovery time	I _S = 0.5 A, V _{GS} = 0, See Figures 1 and 14	V _{DS} = 48 V, di/dt = 100 A/μs,	Z1, Z2, Z3	65		ns
				Z4, Z5, Z6	150		
				D1, D2, D3	200		
Q _{RR}	Total diode charge			Z1, Z2, Z3	0.06		μC
				Z4, Z5, Z6	0.3		
				D1, D2, D3	0.7		

TPIC5621L

SIX-OUTPUT POWER DMOS ARRAY

SLIS033 – JUNE 1994

resistive-load switching characteristics, $T_C = 25^\circ\text{C}$


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{d(on)}$ Turn-on delay time	$V_{DD} = 25\text{ V}$, $t_{dis} = 10\text{ ns}$, $R_L = 50\ \Omega$, See Figure 2 $t_{en} = 10\text{ ns}$,		9	18	ns
$t_{d(off)}$ Turn-off delay time			20	40	
t_r Rise time			21	42	
t_f Fall time			25	50	
Q_g Total gate charge	$V_{DS} = 48\text{ V}$, See Figure 3 $I_D = 0.5\text{ A}$, $V_{GS} = 5\text{ V}$,		3.1	3.7	nC
$Q_{gs(th)}$ Threshold gate-to-source charge			0.5	0.6	
Q_{gd} Gate-to-drain charge			1.9	2.3	
L_D Internal drain inductance			5		nH
L_S Internal source inductance			5		
R_g Internal gate resistance			0.25		
					Ω

thermal resistance

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$R_{\theta JA}$ Junction-to-ambient thermal resistance (see Note 4)	All outputs with equal power		90		$^\circ\text{C/W}$
$R_{\theta JC}$ Junction-to-case thermal resistance			27		

NOTE 4: Package mounted on an FR4 printed-circuit board with no heat sink

PARAMETER MEASUREMENT INFORMATION

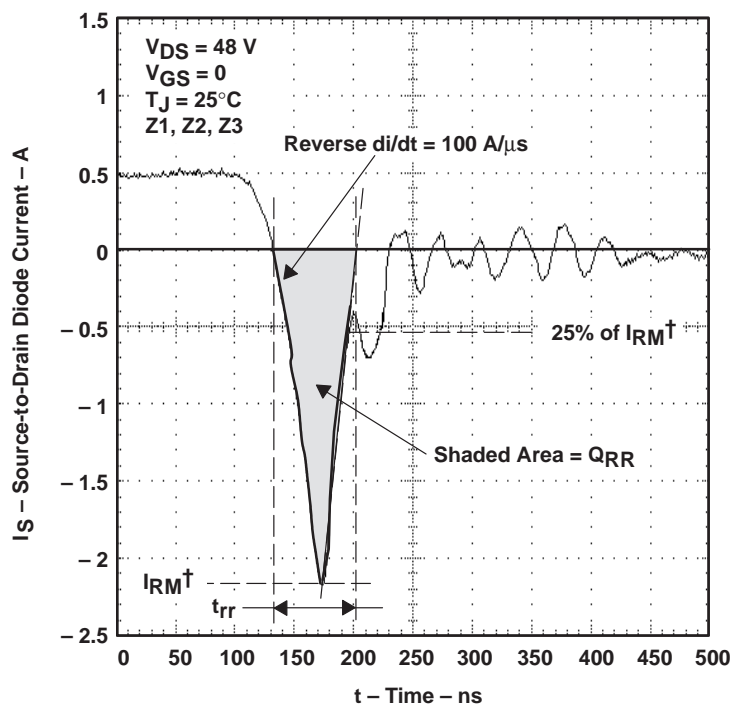


$^\dagger I_{RM}$ = maximum recovery current

NOTE A: The above waveform is representative of Z4, Z5, Z6, D1, D2, and D3 in shape only.

Figure 1. Reverse-Recovery-Current Waveform of Source-to-Drain Diode



PARAMETER MEASUREMENT INFORMATION

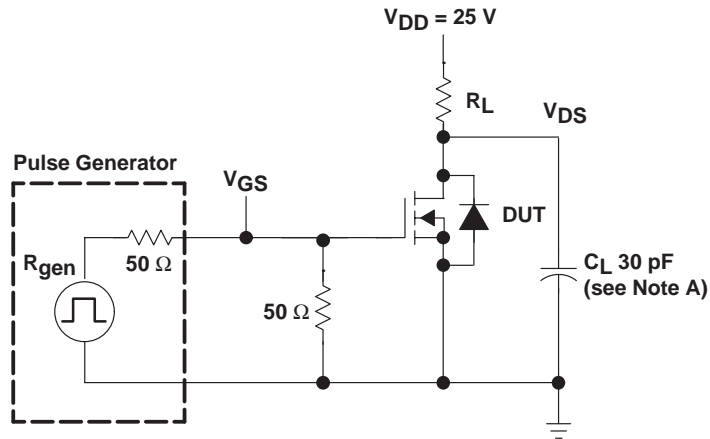

TEST CIRCUIT


NOTE A: C_L includes probe and jig capacitance.

Figure 2. Resistive-Switching Test Circuit and Voltage Waveforms

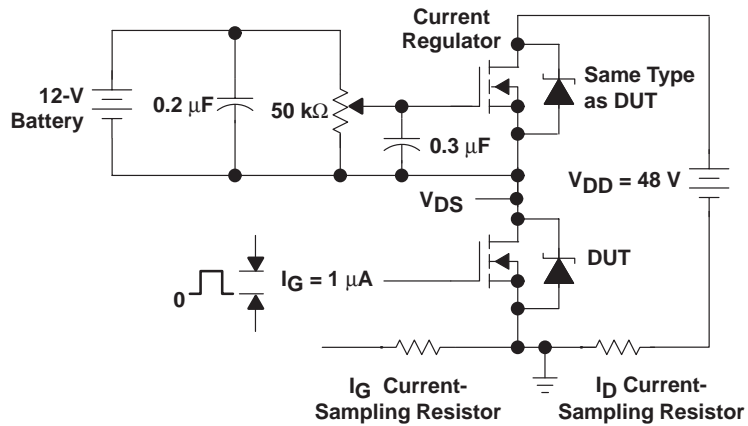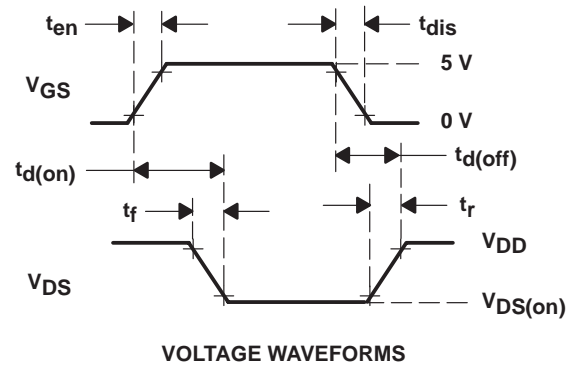

TEST CIRCUIT

Figure 3. Gate-Charge Test Circuit and Voltage Waveform


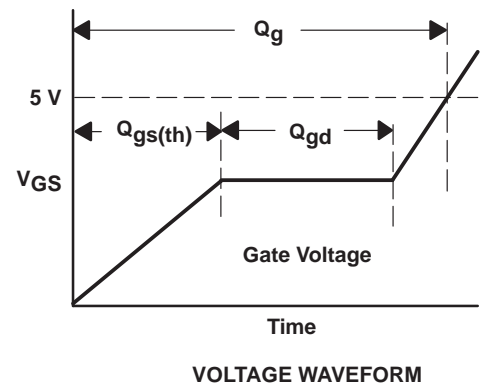


TPIC5621L

SIX-OUTPUT POWER DMOS ARRAY

SLIS033 – JUNE 1994

PARAMETER MEASUREMENT INFORMATION

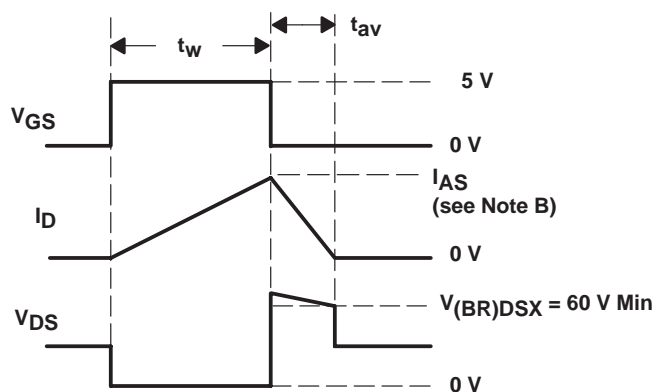
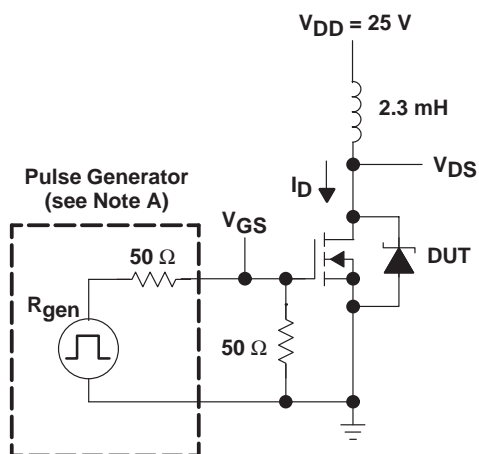


- NOTES: A. The pulse generator has the following characteristics: $t_r \leq 10$ ns, $t_f \leq 10$ ns, $Z_O = 50 \Omega$.
B. Input pulse duration (t_w) is increased until peak current $I_{AS} = 3$ A.

$$\text{Energy test level is defined as } E_{AS} = \frac{I_{AS} \times V_{(BR)DSX} \times t_{av}}{2} = 18 \text{ mJ.}$$

Figure 4. Single-Pulse Avalanche Energy Test Circuit and Waveforms

TYPICAL CHARACTERISTICS

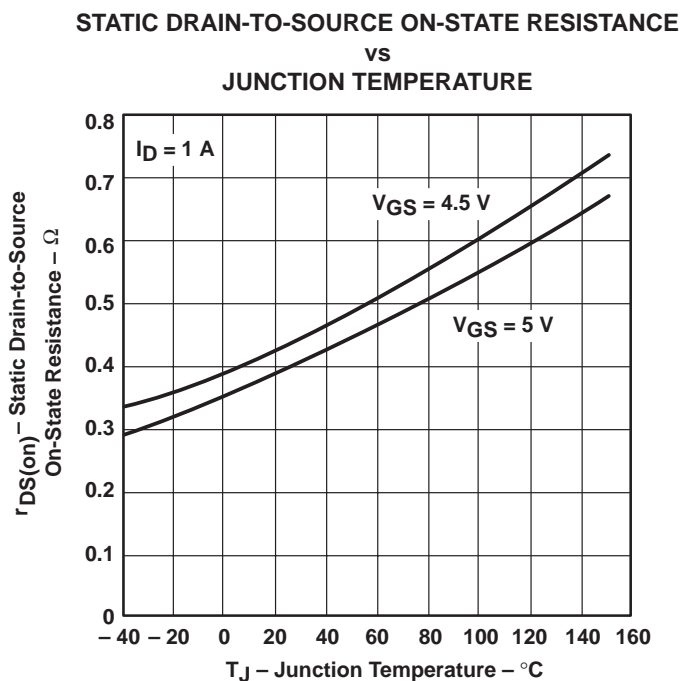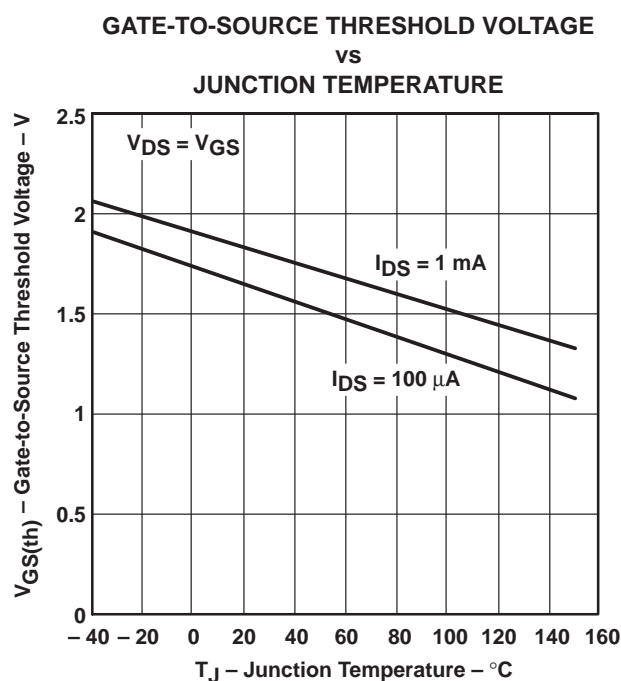

TYPICAL CHARACTERISTICS

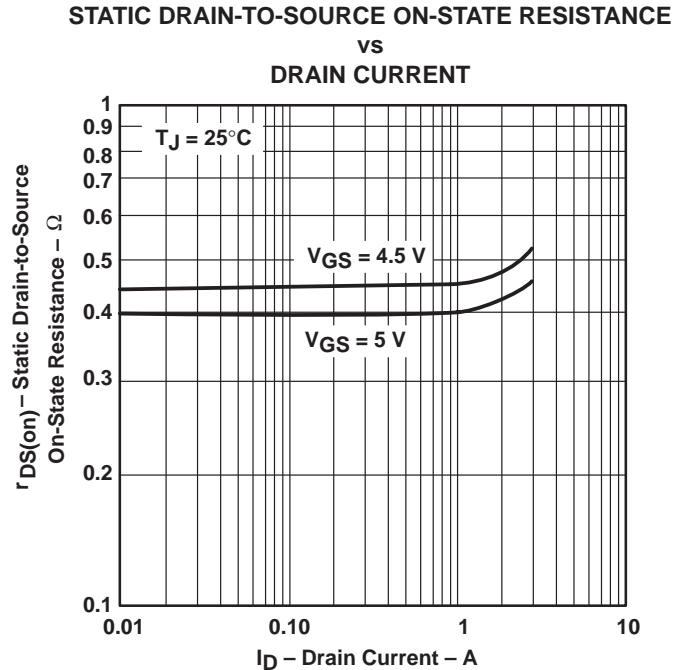


Figure 7

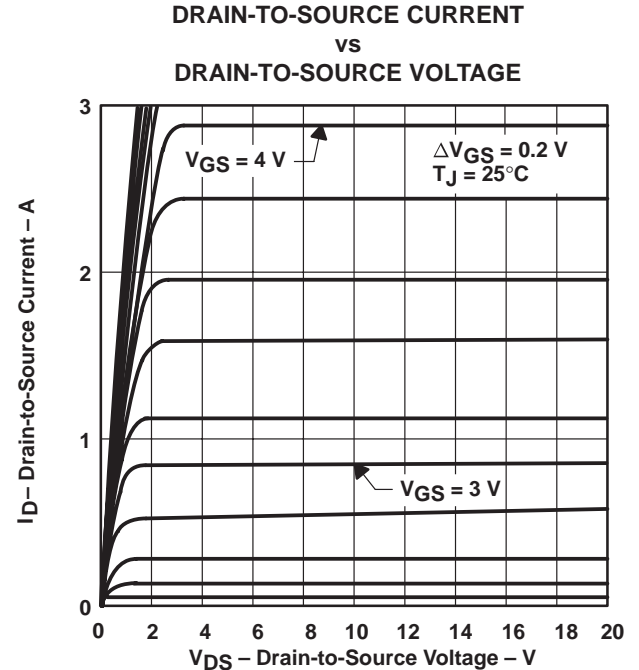


Figure 8

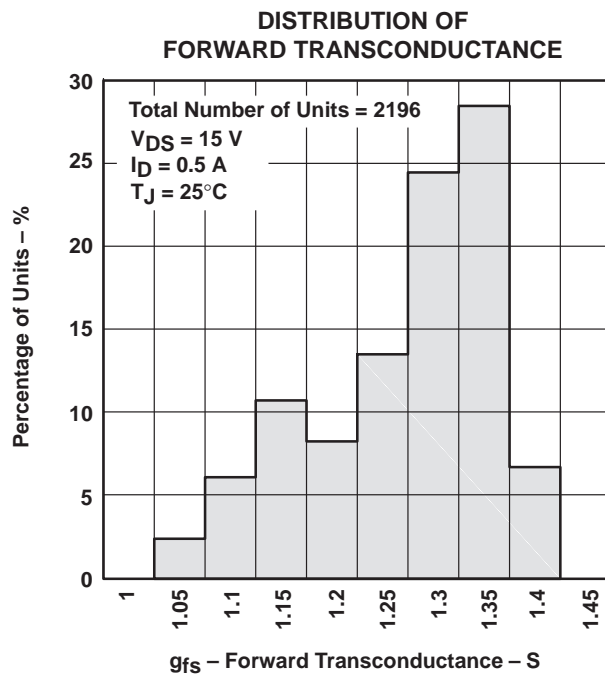


Figure 9

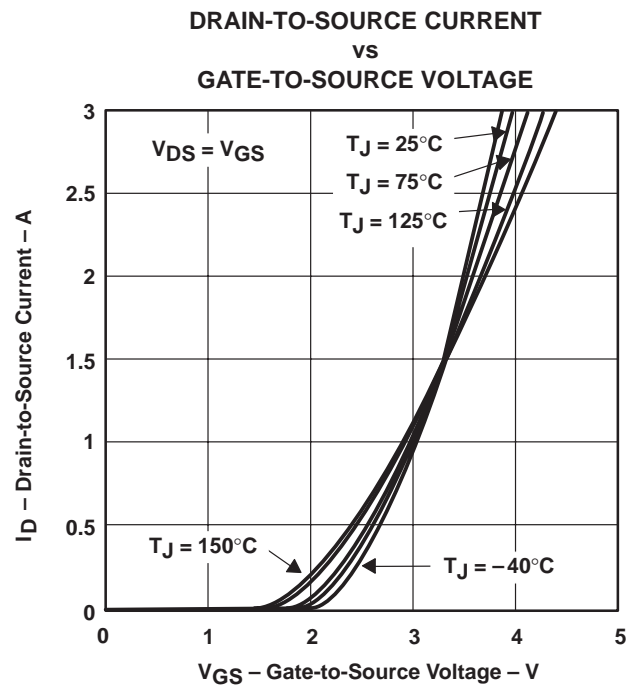


Figure 10

TPIC5621L SIX-OUTPUT POWER DMOS ARRAY

SLIS033 – JUNE 1994

TYPICAL CHARACTERISTICS

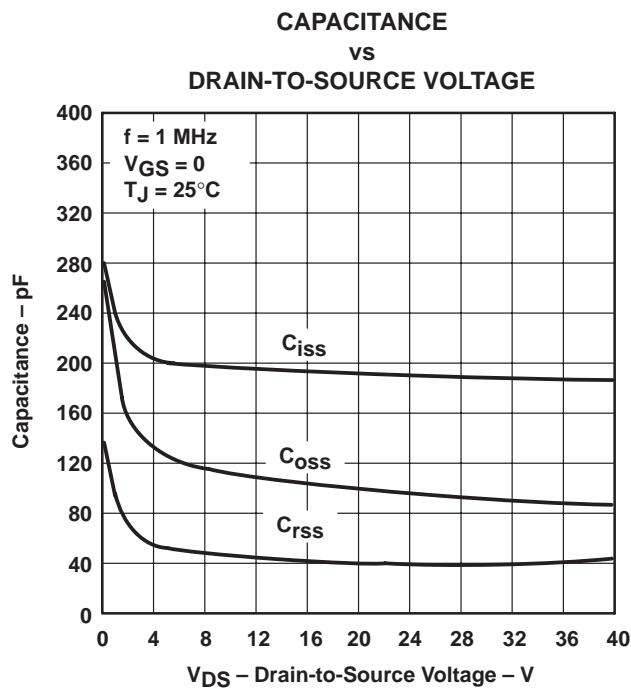


Figure 11

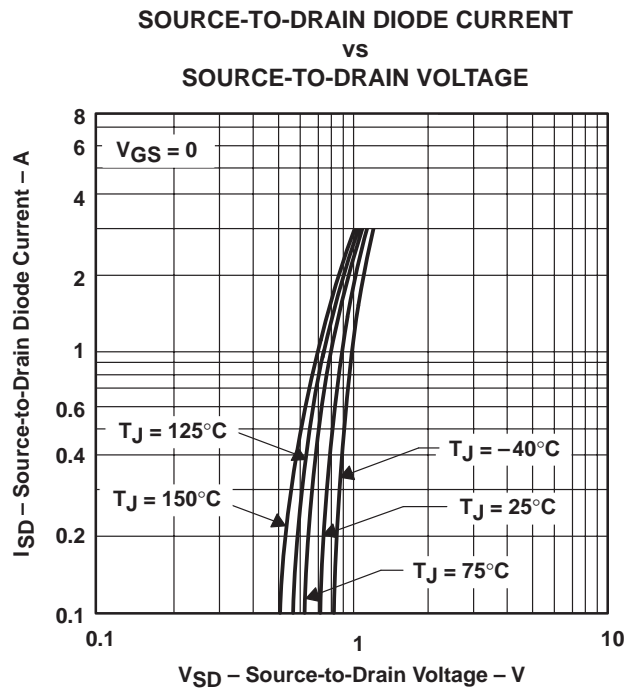


Figure 12

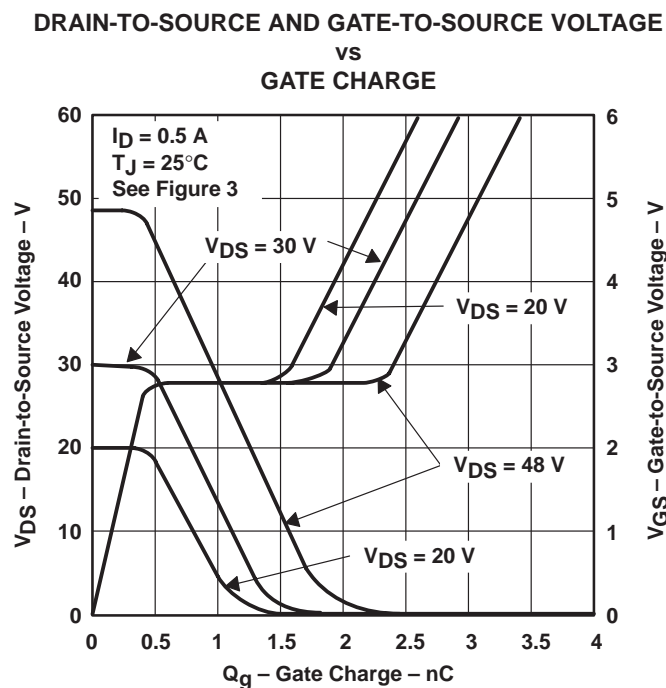


Figure 13


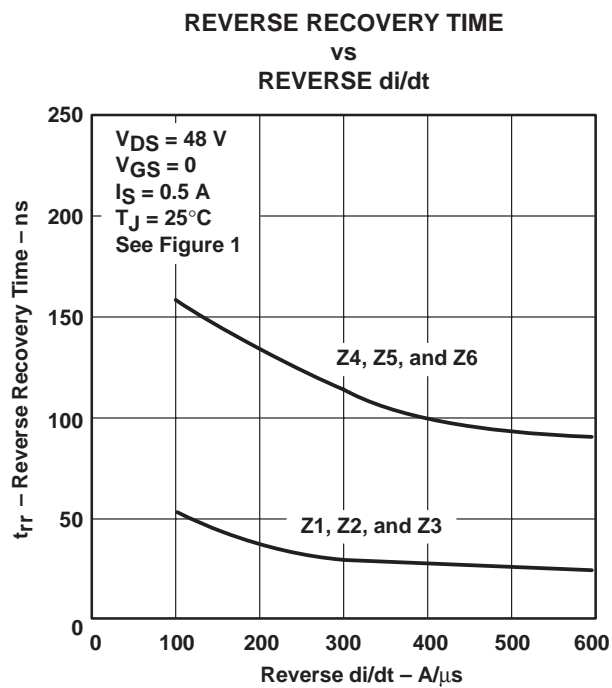


Figure 14

THERMAL INFORMATION

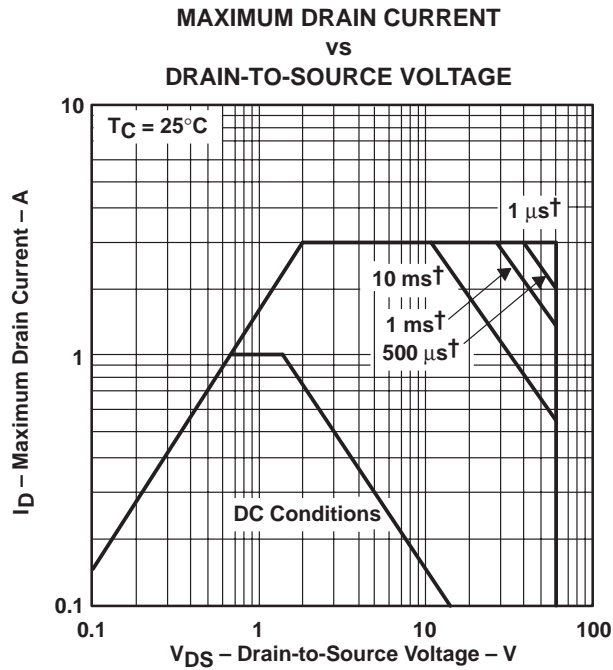

† Less than 2% duty cycle

Figure 15


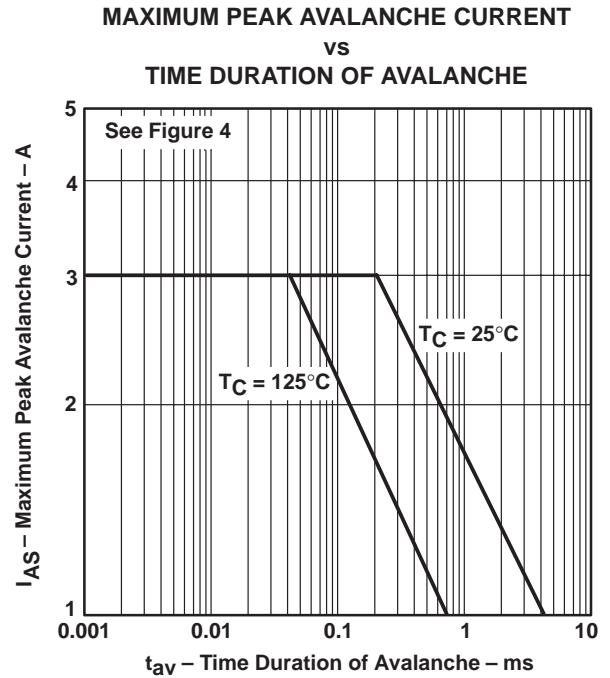


Figure 16

TPIC5621L SIX-OUTPUT POWER DMOS ARRAY

SLIS033 – JUNE 1994

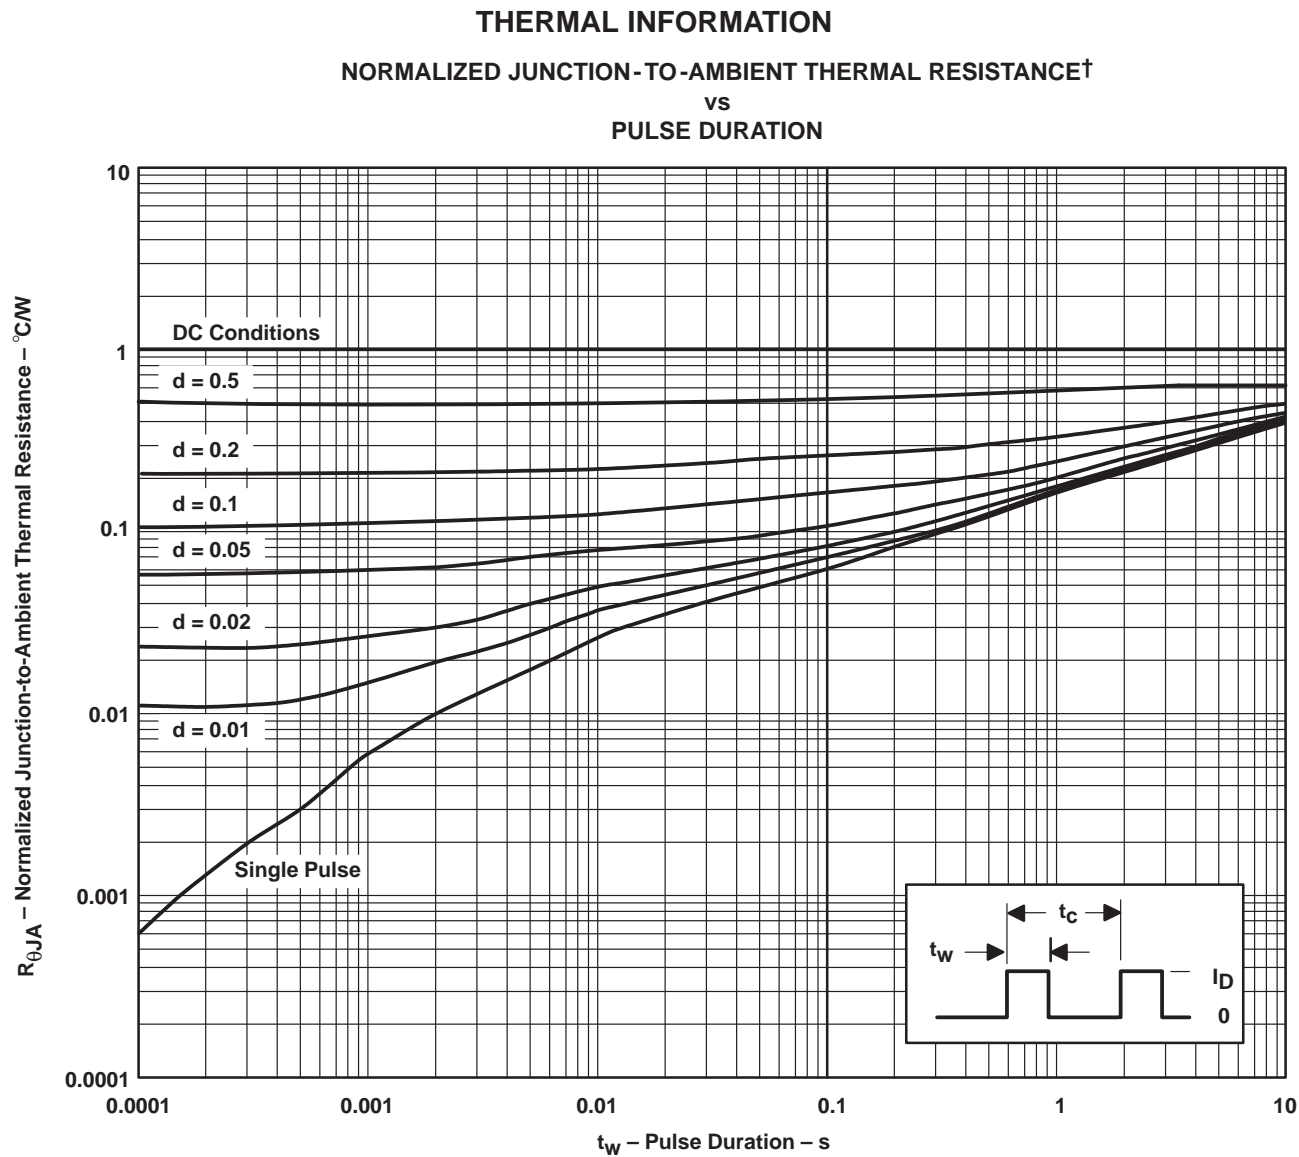

† Device mounted on FR4 printed-circuit board with no heat sink

NOTES: $Z_{\theta A}(t) = r(t) R_{\theta JA}$
 t_W = pulse duration
 t_C = cycle time
 d = duty cycle = t_W/t_C

Figure 17

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.