


# 3-CHANNEL INDEPENDENT LOGIC-LEVEL POWER DMOS ARRAY

SLIS034A – JUNE 1994 – REVISED NOVEMBER 1994

- Low  $r_{DS(on)}$  . . . 0.45  $\Omega$  Typ
- High-Voltage Outputs . . . 60 V
- Pulsed Current . . . 3 A Per Channel
- Fast Commutation Speed
- Direct Logic-Level Interface

D PACKAGE  
(TOP VIEW)

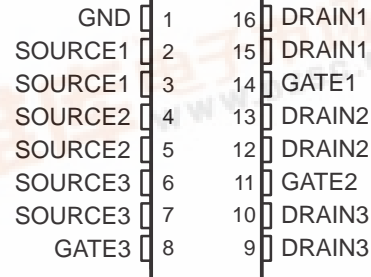


## description

The TPIC5322L is a monolithic logic-level power DMOS array that consists of three electrically isolated independent N-channel enhancement-mode DMOS transistors.

The TPIC5322L is offered in a standard 16-pin small-outline surface-mount (D) package and is characterized for operation over the case temperature range of  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .

## schematic

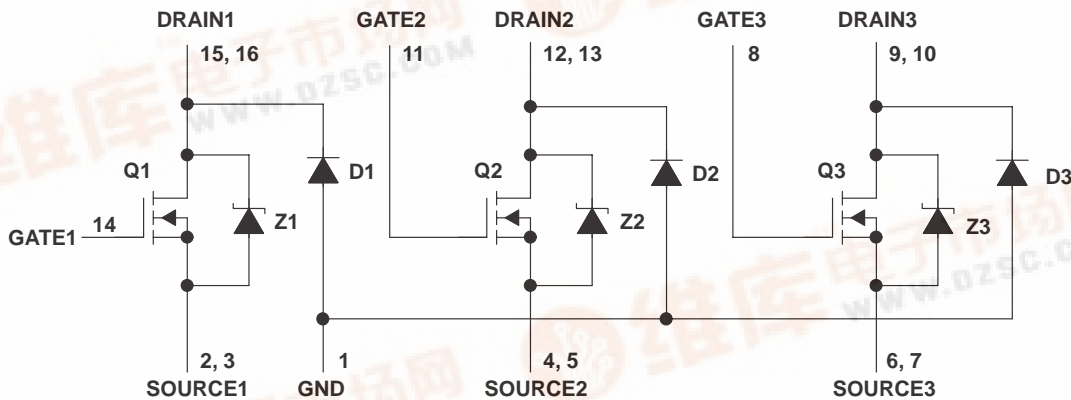

## absolute maximum ratings over operating case temperature range (unless otherwise noted)†

Drain-to-source voltage, $V_{DS}$ . . . . .	60 V
Source-to-GND voltage . . . . .	100 V
Drain-to-GND voltage . . . . .	100 V
Gate-to-source voltage, $V_{GS}$ . . . . .	$\pm 20$ V
Continuous drain current, each output, all outputs on, $T_C = 25^{\circ}\text{C}$ . . . . .	1 A
Continuous source-to-drain diode current, $T_C = 25^{\circ}\text{C}$ . . . . .	1 A
Pulsed drain current, each output, $I_{max}$ , $T_C = 25^{\circ}\text{C}$ (see Note 1 and Figure 15) . . . . .	3 A
Single-pulse avalanche energy, $E_{AS}$ , $T_C = 25^{\circ}\text{C}$ (see Figure 4) . . . . .	40.5 mJ
Continuous total power dissipation at (or below) $T_C = 25^{\circ}\text{C}$ . . . . .	1.09 W
Operating virtual junction temperature range, $T_J$ . . . . .	$-40^{\circ}\text{C}$ to $150^{\circ}\text{C}$
Operating case temperature range, $T_C$ . . . . .	$-40^{\circ}\text{C}$ to $125^{\circ}\text{C}$
Storage temperature range . . . . .	$-65^{\circ}\text{C}$ to $150^{\circ}\text{C}$
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds . . . . .	$260^{\circ}\text{C}$

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: Pulse duration = 10 ms and duty cycle = 2%.



# TPIC5322L

## 3-CHANNEL INDEPENDENT LOGIC-LEVEL POWER DMOS ARRAY

SLIS034A – JUNE 1994 – REVISED NOVEMBER 1994

### electrical characteristics, $T_C = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
$V_{(BR)DSX}$	Drain-to-source breakdown voltage	$I_D = 250 \mu\text{A}$ ,	$V_{GS} = 0$	60			V
$V_{GS(th)}$	Gate-to-source threshold voltage	$I_D = 1 \text{ mA}$ , See Figure 5	$V_{DS} = V_{GS}$ ,	1.5	1.85	2.2	V
$V_{(BR)}$	Reverse drain-to-GND breakdown voltage (across D1, D2, and D3)	Drain-to-GND current = $250 \mu\text{A}$		100			V
$V_{DS(on)}$	Drain-to-source on-state voltage	$I_D = 1 \text{ A}$ , See Notes 2 and 3	$V_{GS} = 5 \text{ V}$ ,		0.45	0.525	V
$V_{F(SD)}$	Forward on-state voltage, source-to-drain	$I_S = 1 \text{ A}$ , See Notes 2 and 3 and Figure 12	$V_{GS} = 0$ ,		0.85	1	V
$V_F$	Forward on-state voltage, GND-to-drain	$I_D = 1 \text{ A}$			3.7		V
$I_{DSS}$	Zero-gate-voltage drain current	$V_{DS} = 48 \text{ V}$ , $V_{GS} = 0$	$T_C = 25^\circ\text{C}$		0.05	1	$\mu\text{A}$
			$T_C = 125^\circ\text{C}$		0.5	10	
$I_{GSSF}$	Forward gate current, drain short circuited to source	$V_{GS} = 16 \text{ V}$ ,	$V_{DS} = 0$		10	100	nA
$I_{GSSR}$	Reverse gate current, drain short circuited to source	$V_{SG} = 16 \text{ V}$ ,	$V_{DS} = 0$		10	100	nA
$I_{lkg}$	Leakage current, drain-to-GND	$V_{DGND} = 48 \text{ V}$	$T_C = 25^\circ\text{C}$		0.05	1	$\mu\text{A}$
			$T_C = 125^\circ\text{C}$		0.5	10	
$r_{DS(on)}$	Static drain-to-source on-state resistance	$V_{GS} = 5 \text{ V}$ , $I_D = 1 \text{ A}$ , See Notes 2 and 3 and Figures 6 and 7	$T_C = 25^\circ\text{C}$		0.45	0.525	$\Omega$
			$T_C = 125^\circ\text{C}$		0.7	0.78	
$g_{fs}$	Forward transconductance	$V_{DS} = 10 \text{ V}$ , See Notes 2 and 3 and Figure 9	$I_D = 0.5 \text{ A}$ ,	1	1.24		S
$C_{iSS}$	Short-circuit input capacitance, common source	$V_{DS} = 25 \text{ V}$ , $f = 1 \text{ MHz}$ ,	$V_{GS} = 0$ , See Figure 11		135	170	pF
$C_{oSS}$	Short-circuit output capacitance, common source				80	100	
$C_{rSS}$	Short-circuit reverse-transfer capacitance, common source				30	40	

NOTES: 2. Technique should limit  $T_J - T_C$  to  $10^\circ\text{C}$  maximum.  
3. These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts.

### source-to-drain and GND-to-drain diode characteristics, $T_C = 25^\circ\text{C}$

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
$t_{rr}$	Reverse-recovery time	$I_S = 0.5 \text{ A}$ , $V_{GS} = 0$ , See Figures 1 and 14	$V_{DS} = 48 \text{ V}$ , $di/dt = 100 \text{ A}/\mu\text{s}$ ,	Z1, Z2, Z3	35		ns
				D1, D2, D3	110		
$Q_{RR}$	Total diode charge			Z1, Z2,Z3	0.035		$\mu\text{C}$
				D1, D2, D2	0.35		

# TPIC5322L

## 3-CHANNEL INDEPENDENT LOGIC-LEVEL POWER DMOS ARRAY

SLIS034A – JUNE 1994 – REVISED NOVEMBER 1994

### resistive-load switching characteristics, $T_C = 25^\circ\text{C}$


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{d(on)}$ Turn-on delay time	$V_{DD} = 25\text{ V}$ , $R_L = 50\ \Omega$ , $t_{en} = 10\text{ ns}$ , $t_{dis} = 10\text{ ns}$ , See Figure 2		21	42	ns
$t_{d(off)}$ Turn-off delay time			20	40	
$t_r$ Rise time			5	10	
$t_f$ Fall time			13	26	
$Q_g$ Total gate charge	$V_{DS} = 48\text{ V}$ , $I_D = 0.5\text{ A}$ , $V_{GS} = 5\text{ V}$ , See Figure 3		3.1	3.8	nC
$Q_{gs(th)}$ Threshold gate-to-source charge			0.4	0.5	
$Q_{gd}$ Gate-to-drain charge			1.3	1.6	
$L_D$ Internal drain inductance			5		nH
$L_S$ Internal source inductance			5		
$R_g$ Internal gate resistance			0.25		$\Omega$

### thermal resistance

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$R_{\theta JA}$ Junction-to-ambient thermal resistance (see Note 4)	All outputs with equal power		115		$^\circ\text{C/W}$
$R_{\theta JP}$ Junction-to-pin thermal resistance			32		$^\circ\text{C/W}$

NOTE 4: Package mounted on an FR4 printed-circuit board with no heat sink

### PARAMETER MEASUREMENT INFORMATION

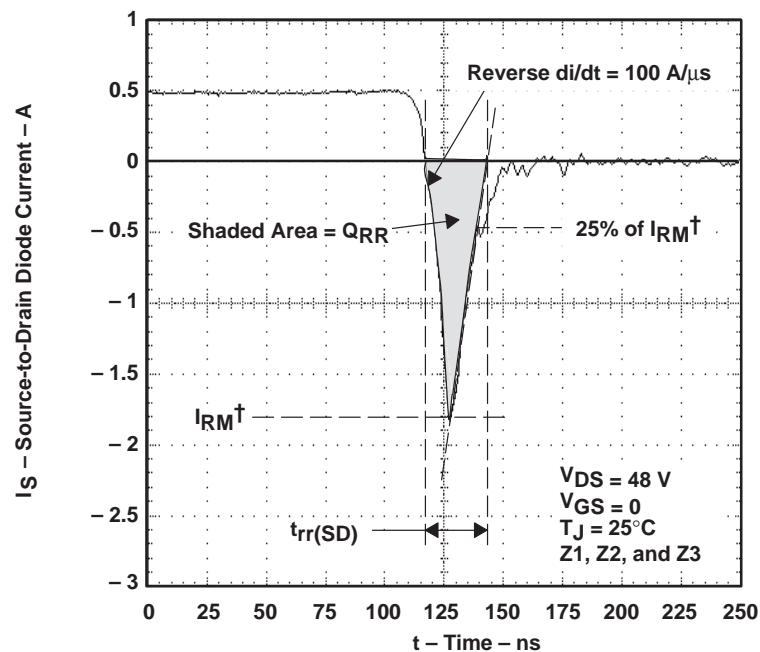

$^\dagger I_{RM}$  = maximum recovery current


NOTE A: The above waveform is representative of D1, D2, and D3 in shape only.

Figure 1. Reverse-Recovery-Current Waveform of Source-to-Drain Diode

# TPIC5322L 3-CHANNEL INDEPENDENT LOGIC-LEVEL POWER DMOS ARRAY

SLIS034A – JUNE 1994 – REVISED NOVEMBER 1994

## PARAMETER MEASUREMENT INFORMATION

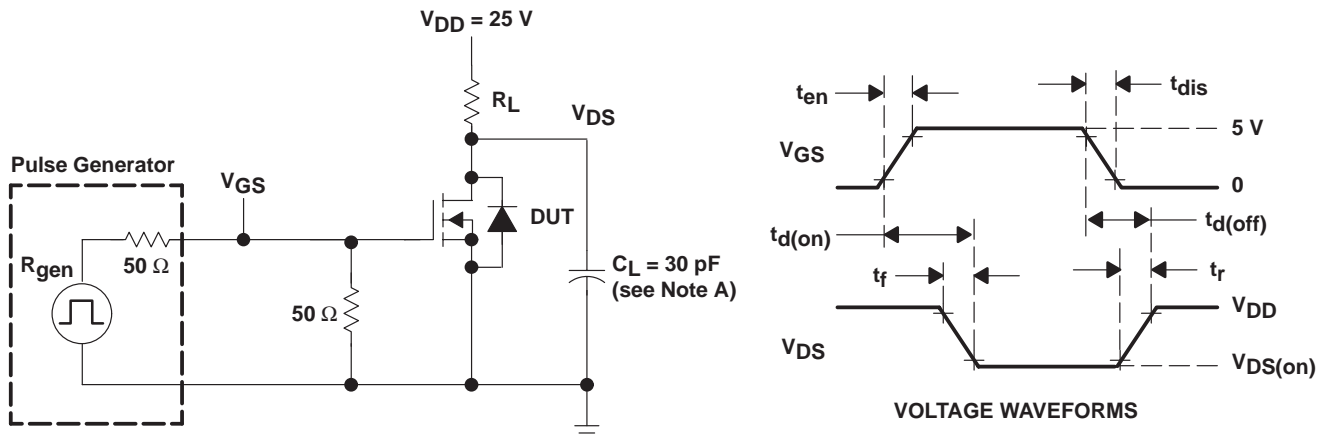

NOTE A:  $C_L$  includes probe and jig capacitance.

Figure 2. Resistive-Switching Test Circuit and Voltage Waveforms



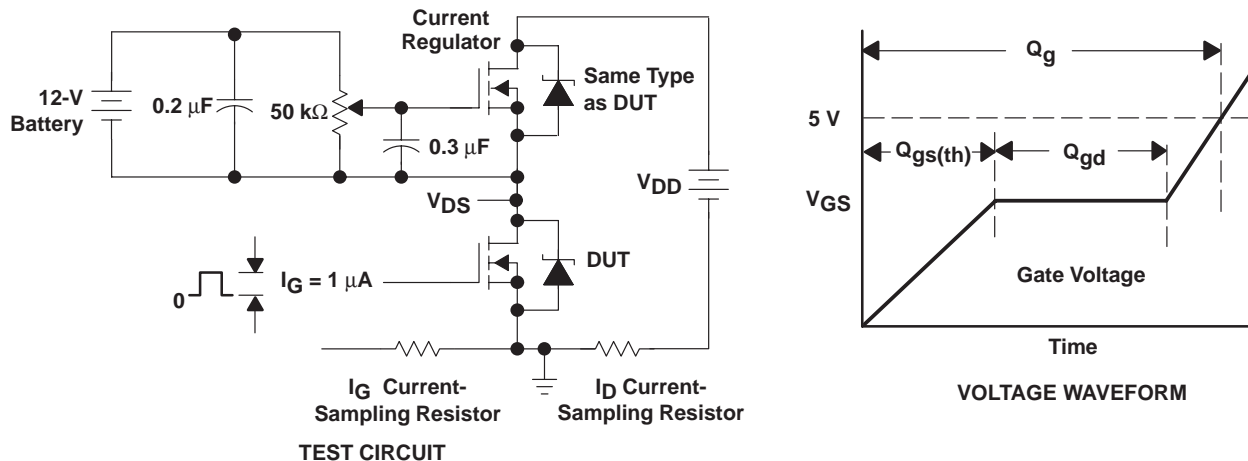


Figure 3. Gate-Charge Test Circuit and Voltage Waveform

PARAMETER MEASUREMENT INFORMATION

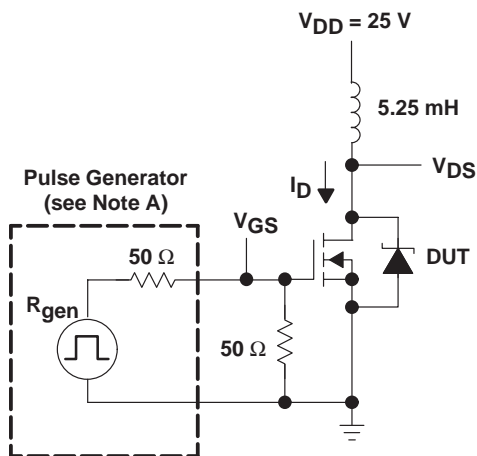

TEST CIRCUIT

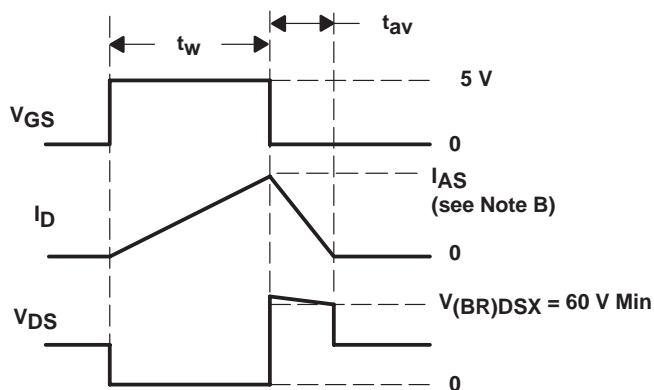

VOLTAGE AND CURRENT WAVEFORMS

- NOTES: A. The pulse generator has the following characteristics:  $t_r \leq 10 \text{ ns}$ ,  $t_f \leq 10 \text{ ns}$ ,  $Z_O = 50 \Omega$ .  
 B. Input pulse duration ( $t_w$ ) is increased until peak current  $I_{AS} = 3 \text{ A}$ .

$$\text{Energy test level is defined as } E_{AS} = \frac{I_{AS} \times V_{(BR)DSX} \times t_{av}}{2} = 40.5 \text{ mJ.}$$

Figure 4. Single-Pulse Avalanche-Energy Test Circuit and Waveforms

TYPICAL CHARACTERISTICS

GATE-TO-SOURCE THRESHOLD VOLTAGE vs JUNCTION TEMPERATURE

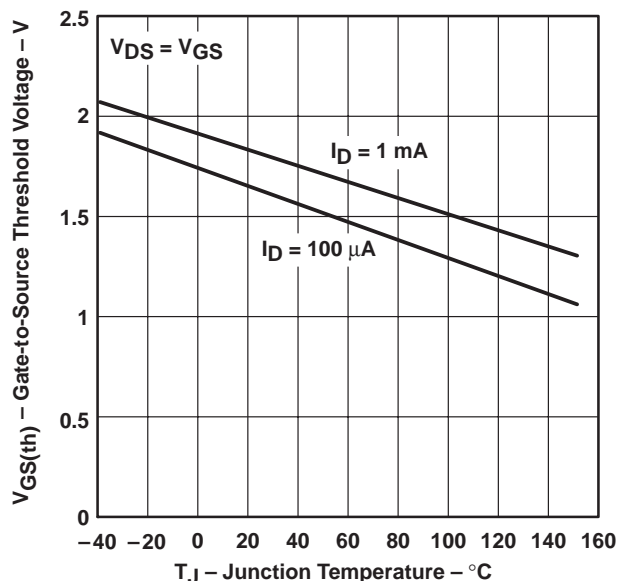


Figure 5

STATIC DRAIN-TO-SOURCE ON-STATE RESISTANCE vs JUNCTION TEMPERATURE

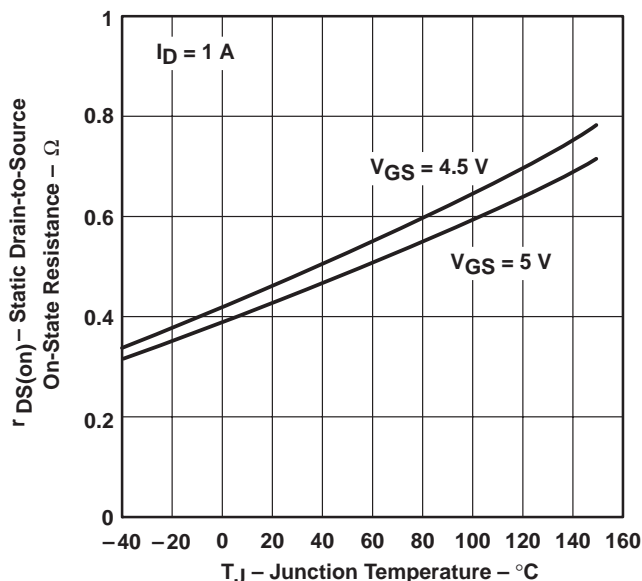


Figure 6

# TPIC5322L

## 3-CHANNEL INDEPENDENT LOGIC-LEVEL POWER DMOS ARRAY

SLIS034A – JUNE 1994 – REVISED NOVEMBER 1994

### TYPICAL CHARACTERISTICS

STATIC DRAIN-TO-SOURCE ON-STATE RESISTANCE  
vs  
DRAIN CURRENT

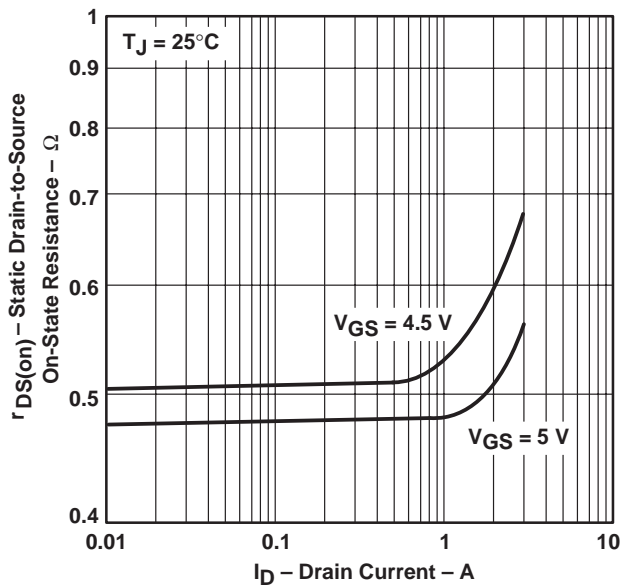


Figure 7

DRAIN CURRENT  
vs  
DRAIN-TO-SOURCE VOLTAGE

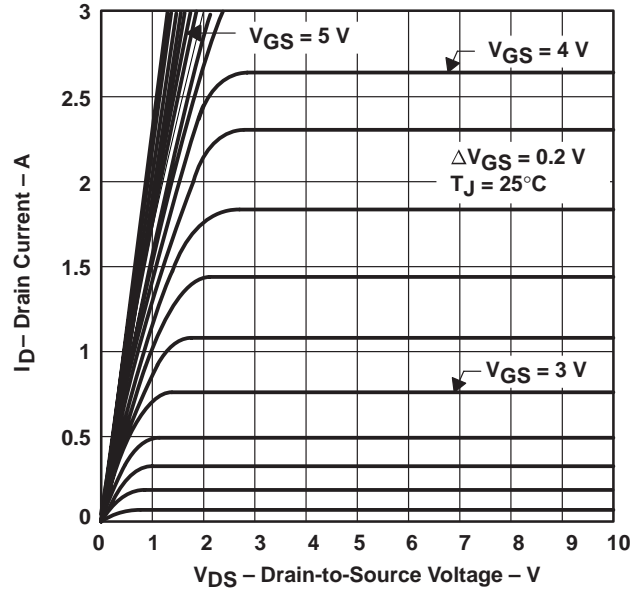


Figure 8

DISTRIBUTION OF  
FORWARD TRANSCONDUCTANCE

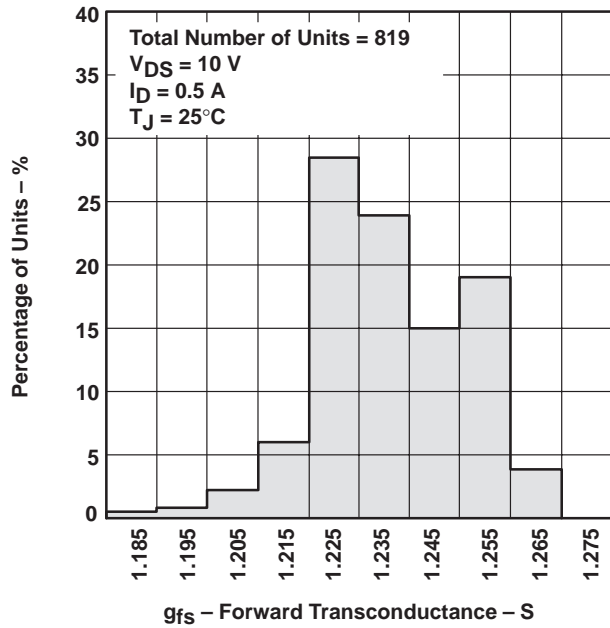


Figure 9

DRAIN CURRENT  
vs  
GATE-TO-SOURCE VOLTAGE

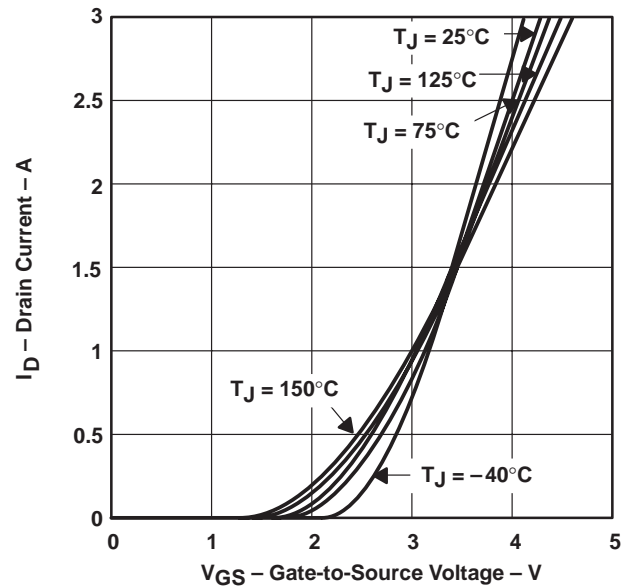


Figure 10

# TPIC5322L

## 3-CHANNEL INDEPENDENT LOGIC-LEVEL POWER DMOS ARRAY

SLIS034A – JUNE 1994 – REVISED NOVEMBER 1994

### TYPICAL CHARACTERISTICS

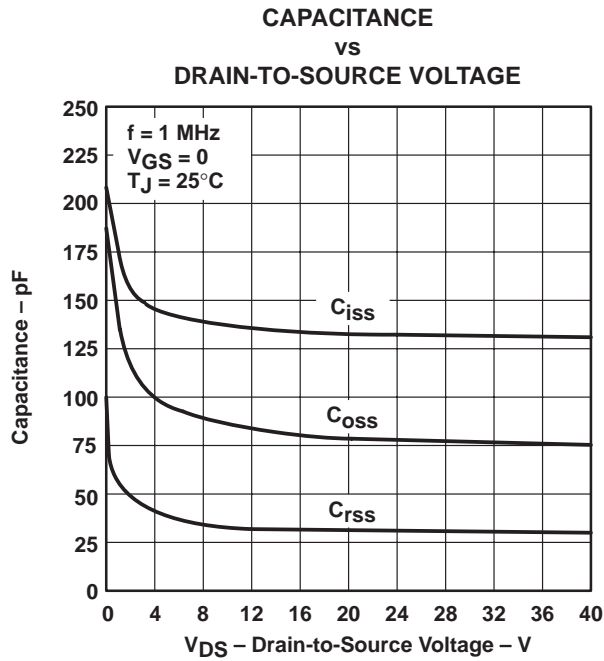


Figure 11

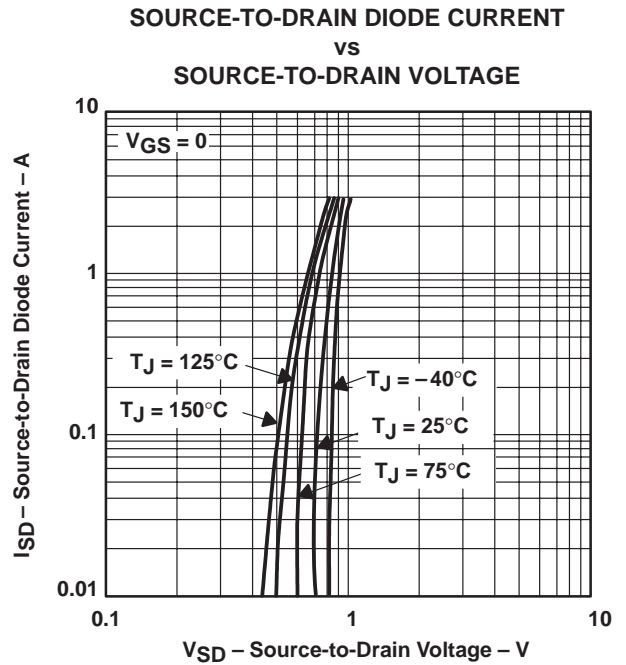


Figure 12

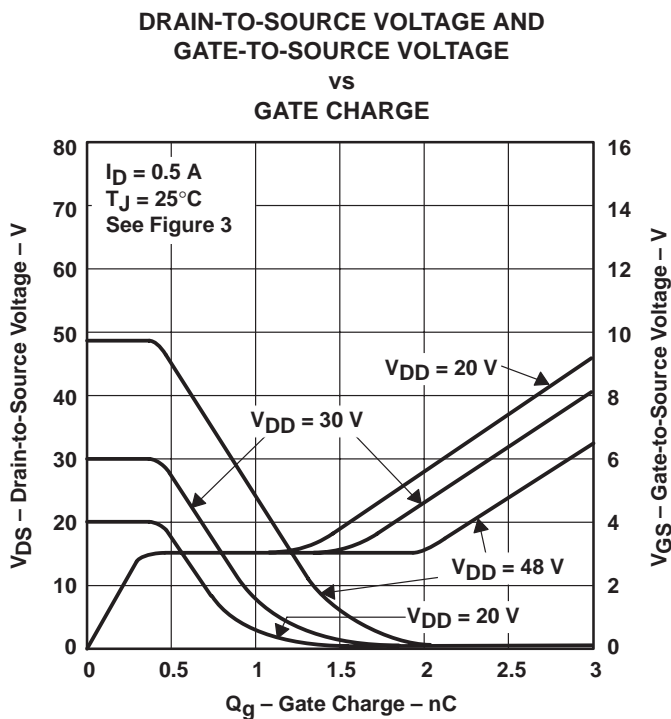


Figure 13

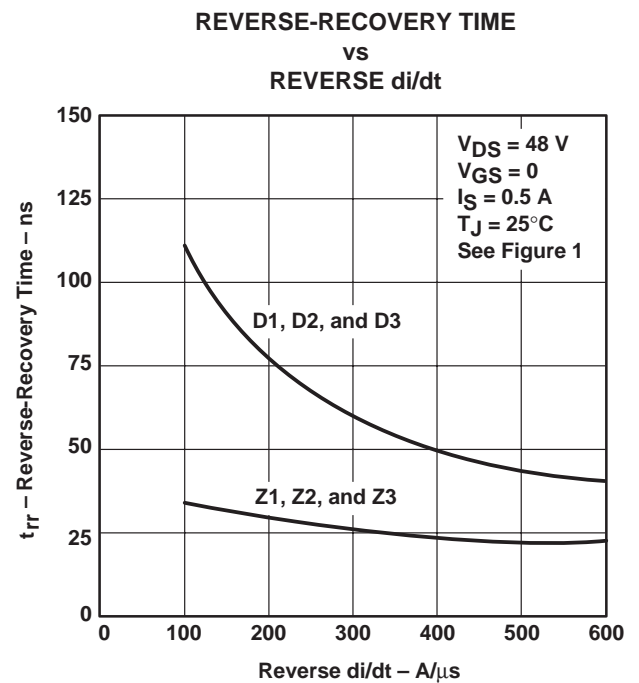



Figure 14

# TPIC5322L 3-CHANNEL INDEPENDENT LOGIC-LEVEL POWER DMOS ARRAY

SLIS034A – JUNE 1994 – REVISED NOVEMBER 1994

## THERMAL INFORMATION


**MAXIMUM DRAIN CURRENT  
vs  
DRAIN-TO-SOURCE VOLTAGE**

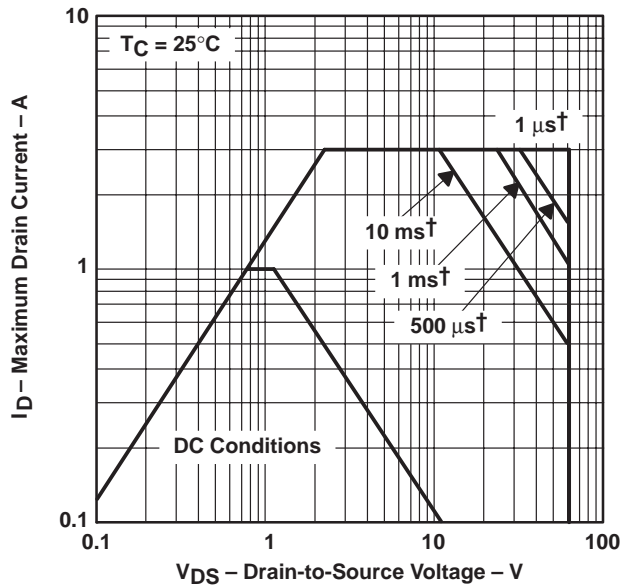

† Less than 2% duty cycle

**Figure 15**

**MAXIMUM PEAK-AVALANCHE CURRENT  
vs  
TIME DURATION OF AVALANCHE**

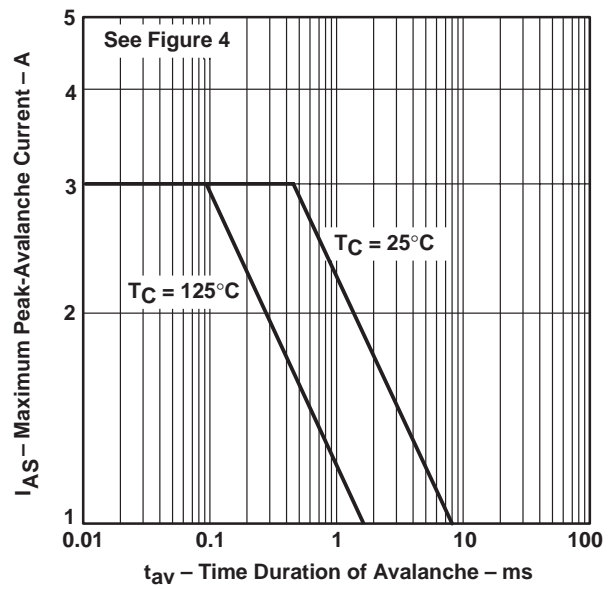

**Figure 16**




# TPIC5322L

## 3-CHANNEL INDEPENDENT LOGIC-LEVEL POWER DMOS ARRAY

SLIS034A – JUNE 1994 – REVISED NOVEMBER 1994

### THERMAL INFORMATION

#### D PACKAGE† NORMALIZED JUNCTION-TO-AMBIENT THERMAL RESISTANCE VS PULSE DURATION

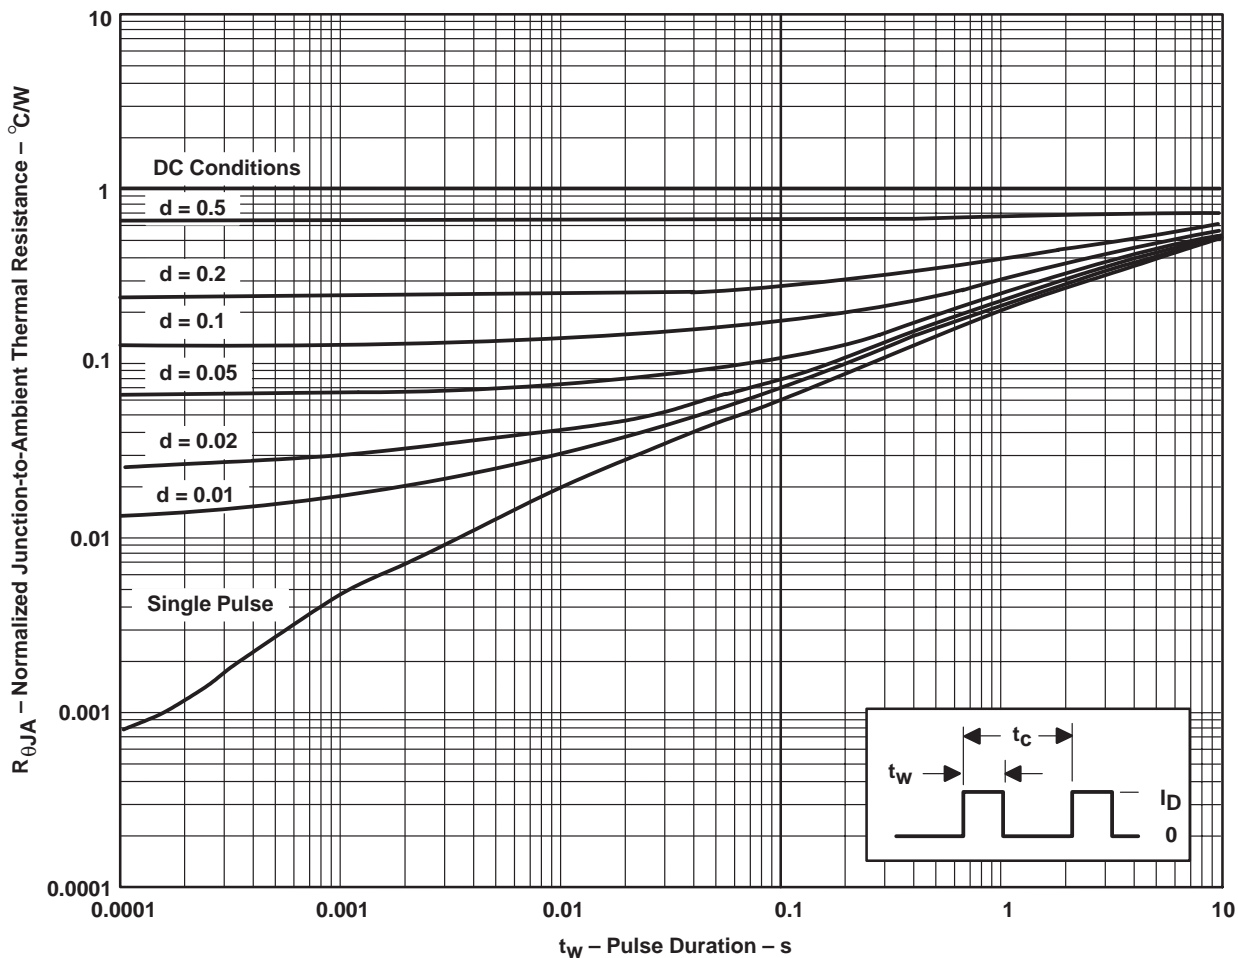

† Device mounted on FR4 printed-circuit board with no heat sink

- NOTES:  $Z_{\theta A}(t) = r(t) R_{\theta JA}$   
 $t_w$  = pulse duration  
 $t_c$  = cycle time  
 $d$  = duty cycle =  $t_w/t_c$

Figure 17

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.