


- Meets or Exceeds the Requirement of ANSI EIA/TIA-422-B
- High-Impedance Output State for Party-Line Operation
- High Output Impedance in Power-Off Condition
- Low Input Current to Minimize Loading
- Single 5-V Supply
- 40-mA Sink- and Source-Current Capability
- High-Speed Schottky Circuitry
- Low Power Requirements

DW OR N PACKAGE
(TOP VIEW)



description

This line driver is designed to provide differential signals with high current capability on balanced lines. This circuit provides strobe and enable inputs to control all four drivers and provides an additional enable input for each driver. The output circuits have active pullup and pulldown resistors and are capable of sinking or sourcing 40 mA.

The SN75151 meets all requirements of ANSI EIA/TIA-422-B and Federal Standard 1020. The SN75151 is characterized for operation from 0°C to 70°C.

FUNCTION TABLE


INPUTS				OUTPUTS	
ENABLE CC	ENABLE C	STROBE S	DATA A	Y	Z
L	X	X	X	Z	Z
X	L	X	X	Z	Z
H	H	L	X	L	H
H	H	X	L	L	H
H	H	H	H	H	L



SN75151 QUADRUPLE DIFFERENTIAL LINE DRIVER


SLLS082B – DECEMBER 1978 – REVISED MAY 1995

logic symbol†

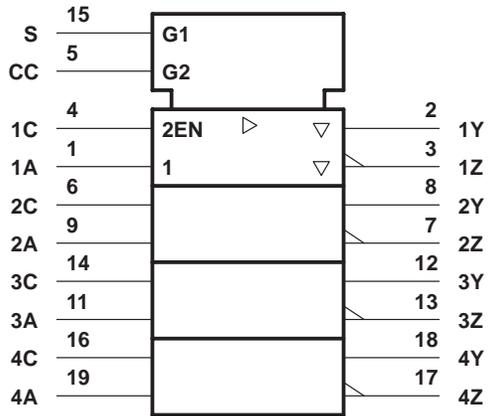


† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagram (positive logic)

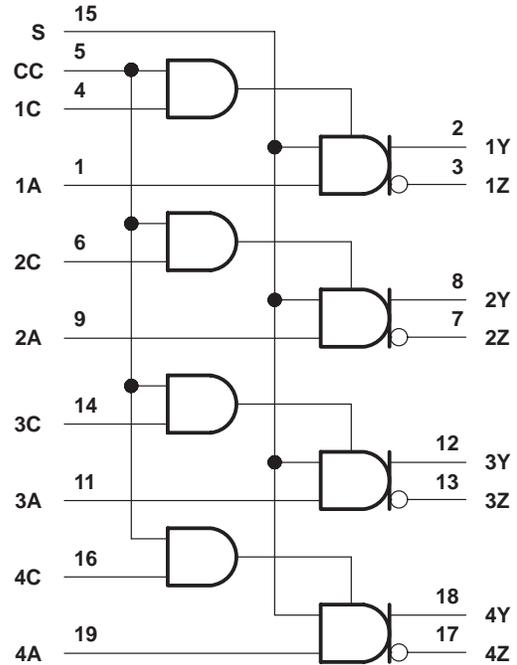

schematic

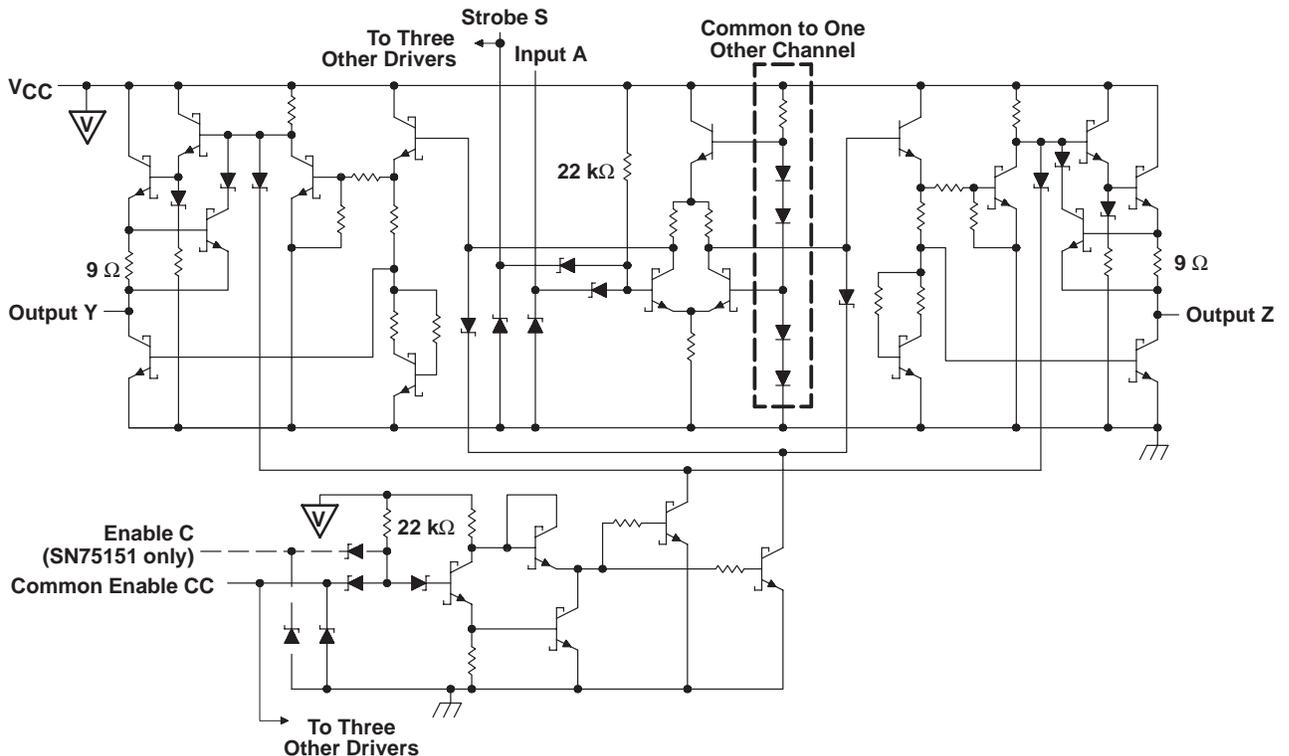

Resistor values shown are nominal.

SN75151 QUADRUPLE DIFFERENTIAL LINE DRIVER

SLLS082B – DECEMBER 1978 – REVISED MAY 1995

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage, V_I	5.5 V
Continuous total dissipation	See Dissipation Rating Table
Operating free-air temperature range, T_A	0°C to 70°C
Storage temperature range, T_{stg}	–65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage values, except differential output voltage V_{OD} , are with respect to network ground terminal.

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	OPERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING
DW	1125 mW	9.0 mW/°C	720 mW
N	1150 mW	9.2 mW/°C	736 mW

recommended operating conditions

	MIN	NOM	MAX	UNIT
Supply voltage, V_{CC}	4.75	5	5.25	V
High-level input voltage, V_{IH}	2			V
Low-level input voltage, V_{IL}			0.8	V
Common-mode output voltage, V_{OC}	–0.25		6	V
High-level output current, I_{OH}			–40	mA
Low-level output current, I_{OL}			40	mA
Operating free-air temperature, T_A	0		70	°C

SN75151 QUADRUPLE DIFFERENTIAL LINE DRIVER

SLLS082B – DECEMBER 1978 – REVISED MAY 1995

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†		MIN	TYP‡	MAX	UNIT
V _{IK}	Input clamp voltage	V _{CC} = MIN, I _I = -12 mA	CC, S			-2	V
			All others			-0.9	
V _{OH}	High-level output voltage	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = MAX,	I _{OH} = -20 mA	2.5			V
			I _{OH} = -40 mA	2.4			
V _{OL}	Low-level output voltage	V _{CC} = MIN, I _{OL} = 40 mA, V _{IL} = MAX, V _{IH} = 2 V,				0.5	V
V _{OD1}	Differential output voltage	V _{CC} = MAX, I _O = 0		3.4	2V _{OD2}		V
V _{OD2}	Differential output voltage	V _{CC} = MIN	R _L = 100 Ω, See Figure 1	2	2.8		V
Δ V _{OD}	Change in magnitude of differential output voltage§	V _{CC} = MIN		±0.01	±0.4		V
V _{OC}	Common-mode output voltage¶	V _{CC} = MAX		1.8	3		V
		V _{CC} = MIN		1.6	3		
Δ V _{OC}	Change in magnitude of common-mode output voltage§	V _{CC} = MIN or MAX	±0.02	±0.4		V	
I _{OZ}	Off-state (high-impedance-state) output current	V _{CC} = MAX, Enable at 0.8 V	V _O = 0.5 V			-20	μA
			V _O = 2.5 V			20	
			V _O = V _{CC}			20	
I _O	Output current with power off	V _{CC} = 0	V _O = 6 V	0.1	100		μA
			V _O = -0.25 V	-0.1	-100		
			V _O = -0.25 V to 6 V			±100	
I _I	Input current at maximum input voltage	V _{CC} = MAX, V _I = 5.5 V				0.1	mA
I _{IH}	High-level input current	V _{CC} = MAX, V _I = 2.4 V	C(SN75151), A			20	μA
			CC, S			80	
I _{IL}	Low-level input current	V _{CC} = MAX, V _I = 0.4 V	C(SN75151), A			-0.36	mA
			CC, S			-1.6	
I _{OS}	Short-circuit output current#	V _{CC} = MAX		-50	-90	-150	mA
I _{CC}	Supply current (both drivers)	V _{CC} = MAX, No load	Outputs disabled	30	60		mA
			Outputs enabled	60	80		

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at T_A = 25°C and V_{CC} = 5 V except for V_{OC}, for which V_{CC} is as stated under test conditions.

§ Δ|V_{OD}| and Δ|V_{OC}| are the changes in magnitudes of V_{OD} and V_{OC}, respectively, that occur when the input is changed from a high level to a low level.

¶ In ANSI Standard EIA/TIA-422-B, V_{OC}, which is the average of the two output voltages with respect to ground, is called output offset voltage, V_{OS}.

Only one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

SN75151 QUADRUPLE DIFFERENTIAL LINE DRIVER

SLLS082B – DECEMBER 1978 – REVISED MAY 1995

switching characteristics over recommended operating free-air temperature range, $V_{CC} = 5\text{ V}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP†	MAX	UNIT
t_{PLH} Propagation delay time, low- to high-level output	$C_L = 30\text{ pF}$, Termination A, $R_L = 100\ \Omega$, See Figure 2		15	30	ns
t_{PHL} Propagation delay time, high- to low-level output			15	30	ns
t_{PLH} Propagation delay time, low- to high-level output	$C_L = 30\text{ pF}$, Termination B, See Figure 2		13	25	ns
t_{PHL} Propagation delay time, high- to low-level output			13	25	ns
t_{TLH} Transition time, low- to high-level output	$C_L = 30\text{ pF}$, Termination A, $R_L = 100\ \Omega$, See Figure 2		12	20	ns
t_{THL} Transition time, high- to low-level output			12	20	ns
t_{PZH} Output enable time to high level	$C_L = 30\text{ pF}$, See Figure 3 $R_L = 60\ \Omega$,		18	35	ns
t_{PZL} Output enable time to low level	$C_L = 30\text{ pF}$, See Figure 4 $R_L = 111\ \Omega$,		20	35	ns
t_{PHZ} Output disable time from high level	$C_L = 30\text{ pF}$, See Figure 3 $R_L = 60\ \Omega$,		19	30	ns
t_{PLZ} Output disable time from low level	$C_L = 30\text{ pF}$, See Figure 4 $R_L = 111\ \Omega$,		13	30	ns
Overshoot factor	$R_L = 100\ \Omega$, Termination C, See Figure 2			10	%

† All typical values are at $T_A = 25^\circ\text{C}$.

PARAMETER MEASUREMENT INFORMATION


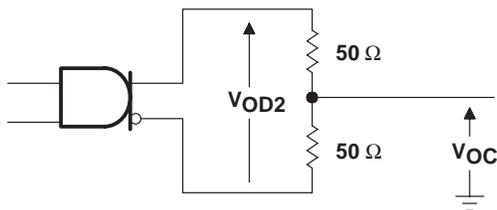


Figure 1. Differential and Common-Mode Output Voltages

SN75151 QUADRUPLE DIFFERENTIAL LINE DRIVER

SLLS082B – DECEMBER 1978 – REVISED MAY 1995

PARAMETER MEASUREMENT INFORMATION

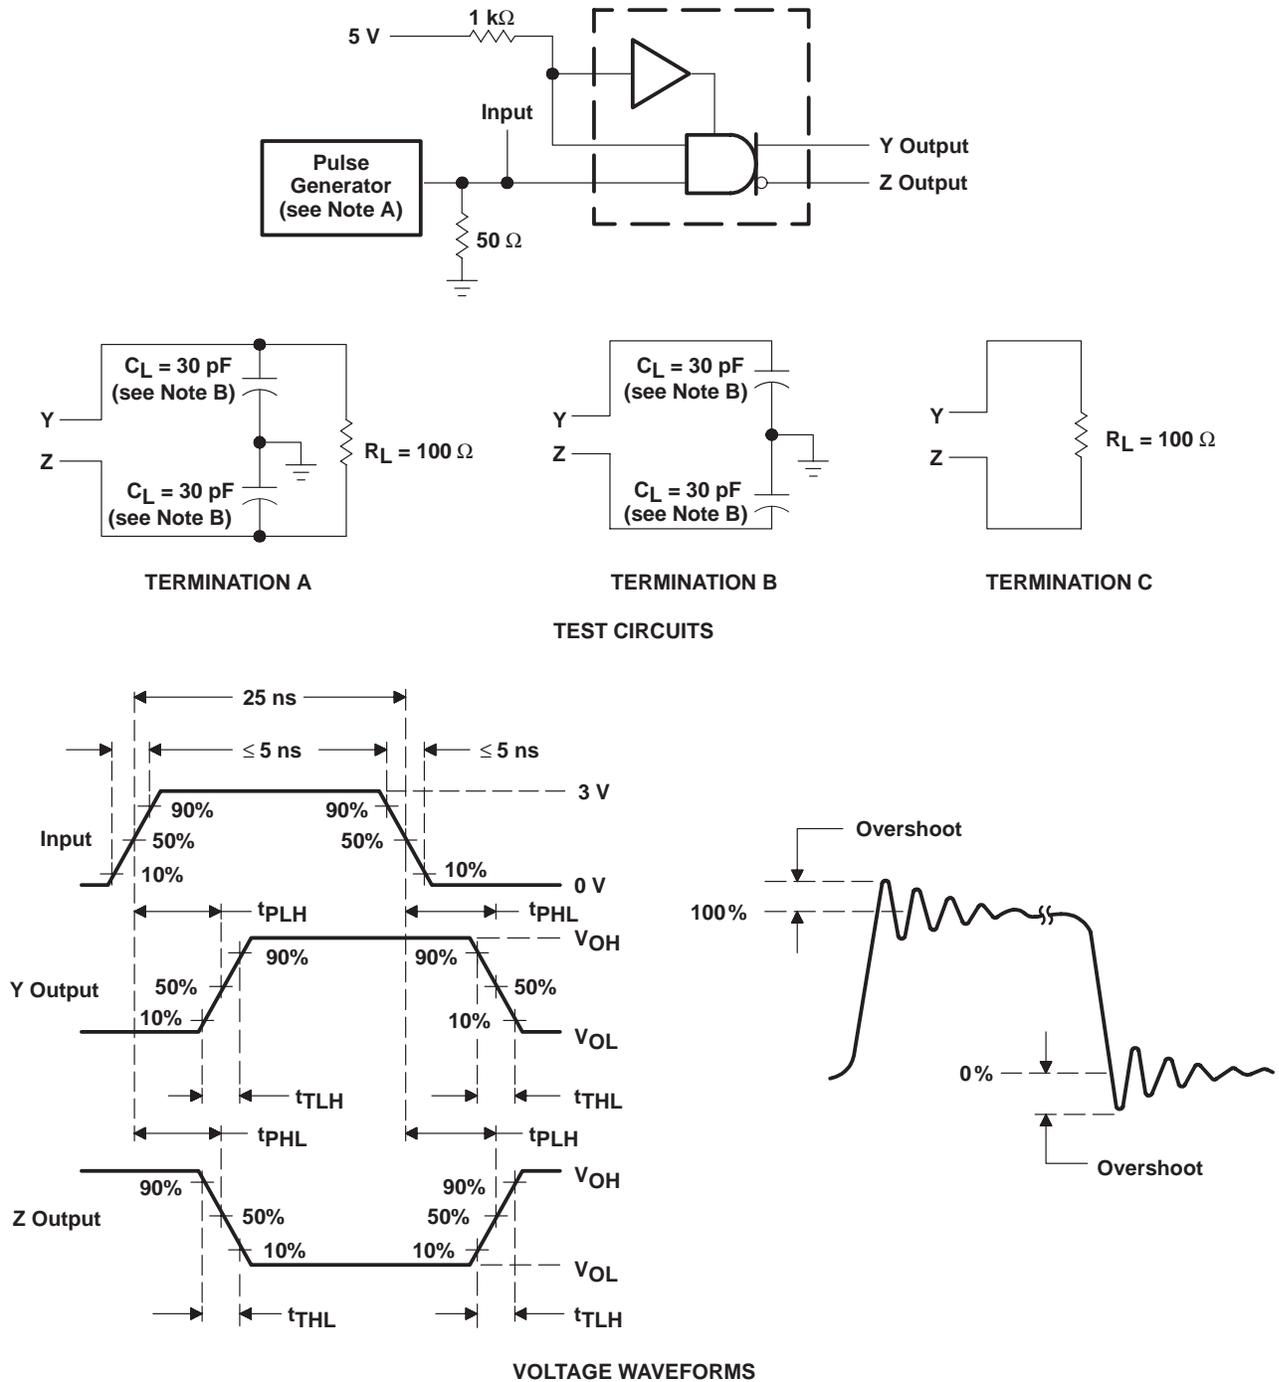



NOTES: A. The pulse generator has the following characteristics: $Z_O = 50 \Omega$, $PRR \leq 10$ MHz.
B. C_L includes probe and jig capacitance.

Figure 2. Test Circuits, Voltage Waveforms, and Overshoot Factor

SN75151 QUADRUPLE DIFFERENTIAL LINE DRIVER

SLLS082B – DECEMBER 1978 – REVISED MAY 1995

PARAMETER MEASUREMENT INFORMATION

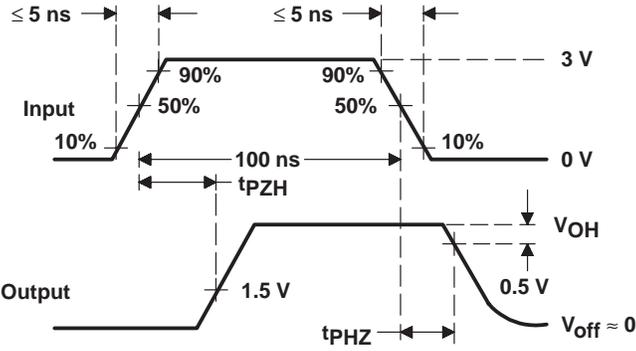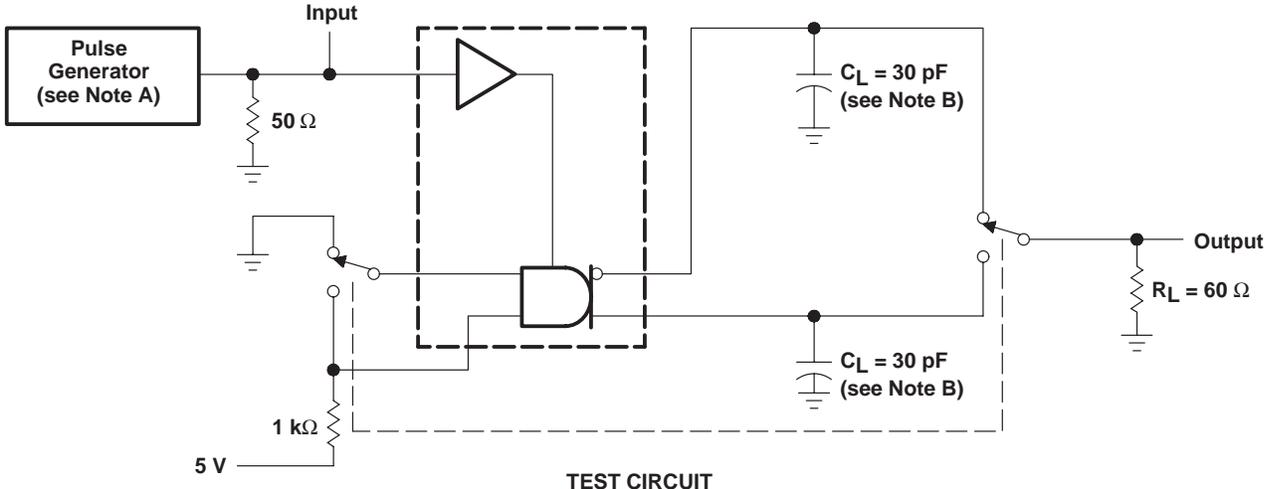



NOTES: A. The pulse generator has the following characteristics: $Z_O = 50 \Omega$, $PRR \leq 500 \text{ kHz}$.
 B. C_L includes probe and jig capacitance.

Figure 3. Test Circuit and Voltage Waveforms

SN75151 QUADRUPLE DIFFERENTIAL LINE DRIVER

SLLS082B – DECEMBER 1978 – REVISED MAY 1995



PARAMETER MEASUREMENT INFORMATION

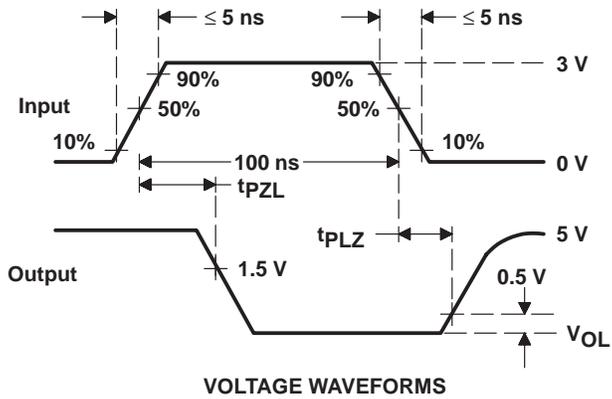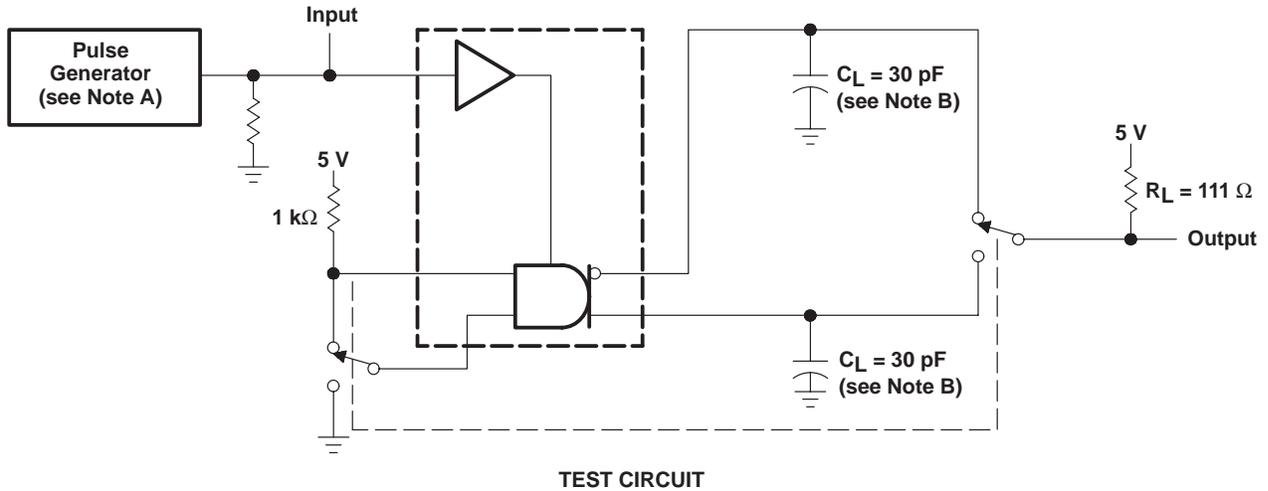


- NOTES: A. The pulse generators have the following characteristics: $Z_O = 50 \Omega$, $PRR \leq 500 \text{ kHz}$.
B. C_L includes probe and jig capacitance.

Figure 4. Test Circuit and Voltage Waveforms

TYPICAL CHARACTERISTICS

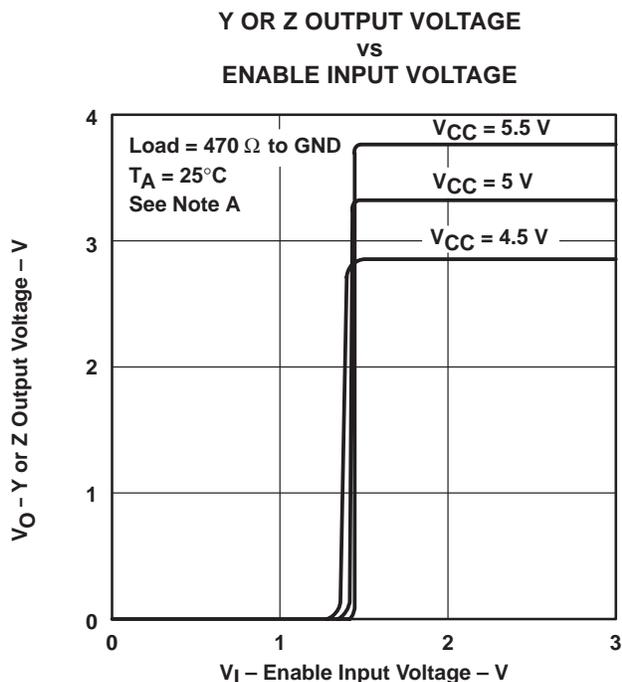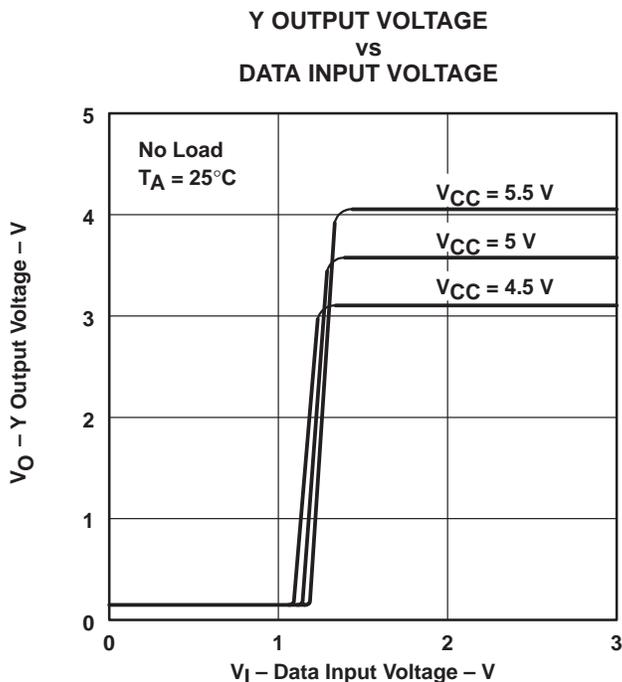

NOTE A: The A input is connected to V_{CC} during the testing of the Y outputs and to ground during testing of the Z outputs.


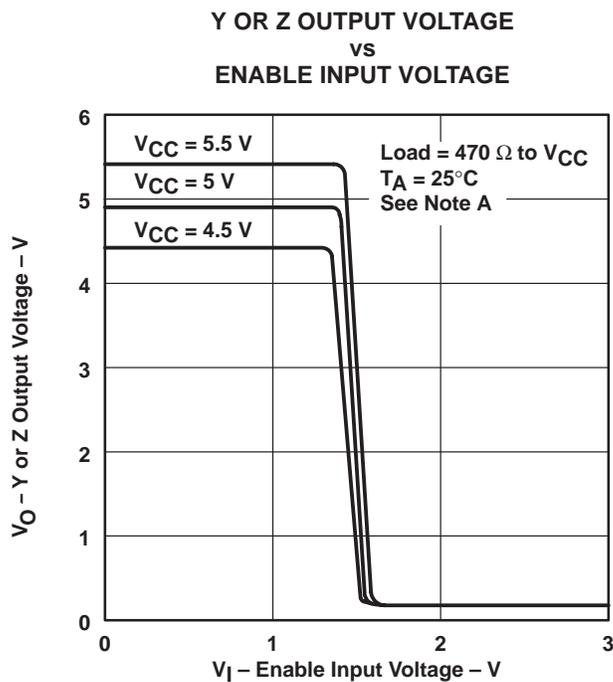


NOTE A: The A input is connected to V_{CC} during the testing of the Y outputs and to V_{CC} during the testing of the Z outputs.



SN75151 QUADRUPLE DIFFERENTIAL LINE DRIVER

SLLS082B – DECEMBER 1978 – REVISED MAY 1995

TYPICAL CHARACTERISTICS

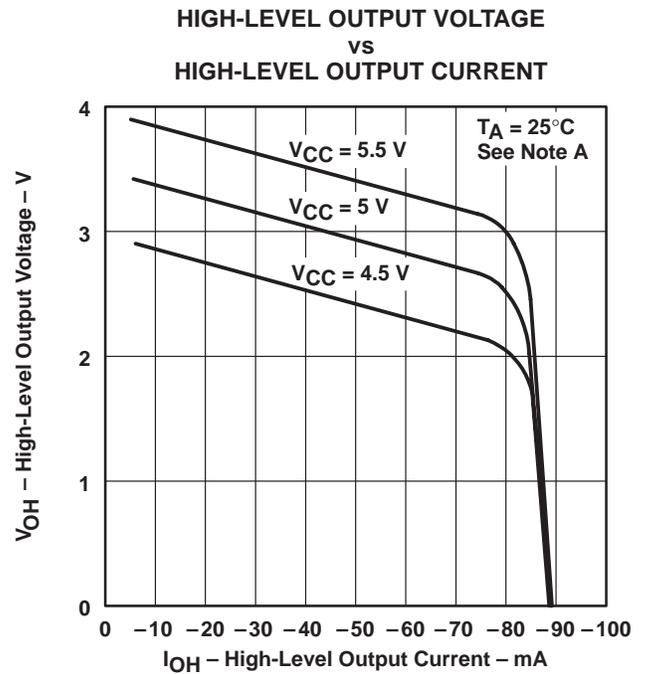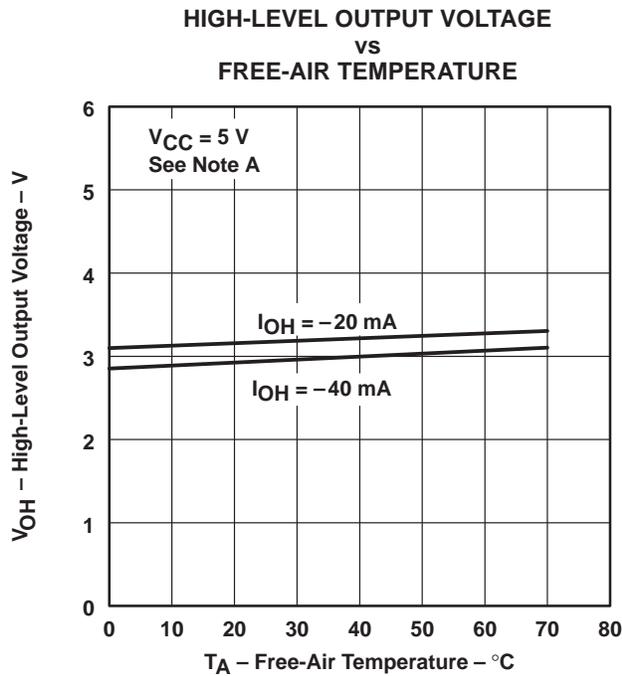

NOTE A: The A input is connected to V_{CC} during the testing of the Y outputs and to ground during testing of the Z outputs.

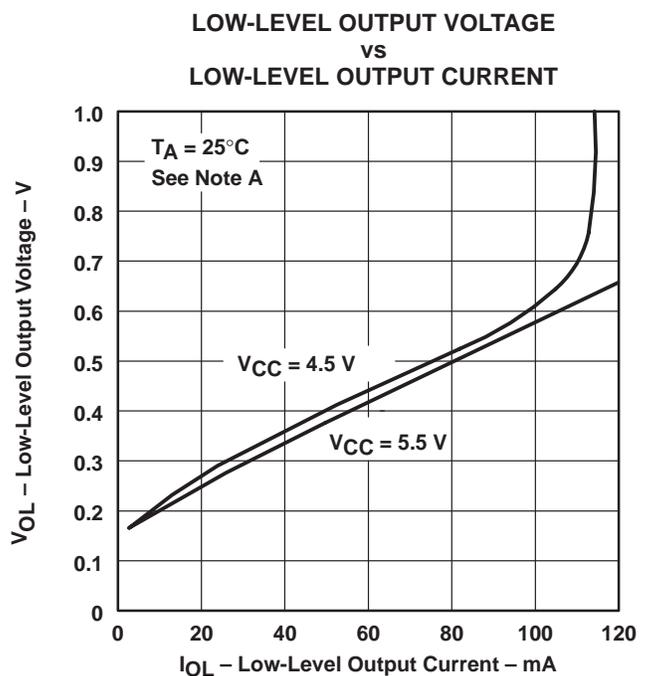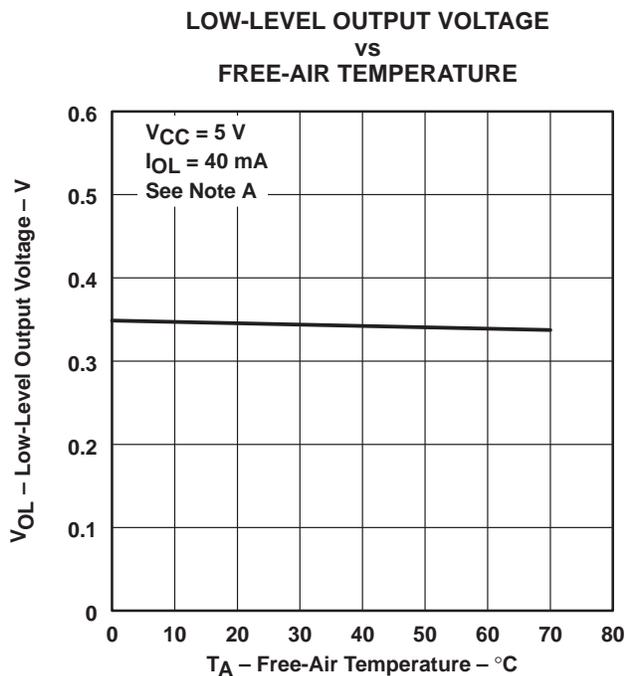

NOTE A: The A input is connected to GND during the testing of the Y outputs and to V_{CC} during the testing of the Z outputs.

SN75151
QUADRUPLE DIFFERENTIAL LINE DRIVER

SLLS082B – DECEMBER 1978 – REVISED MAY 1995

TYPICAL CHARACTERISTICS

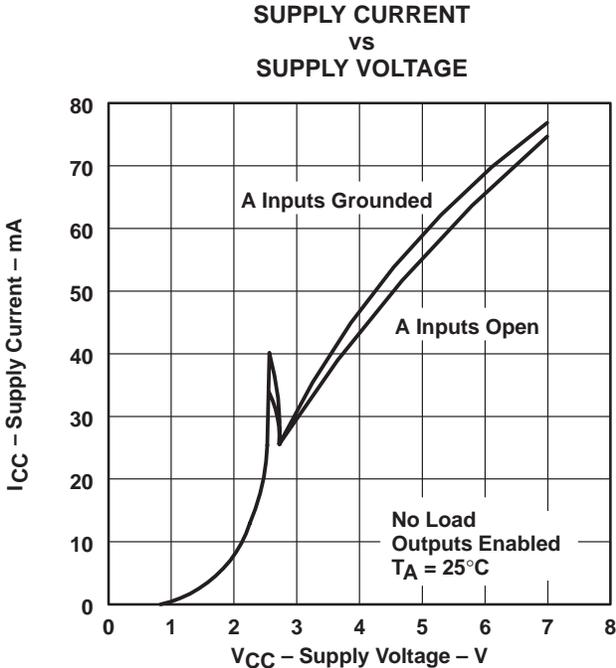


Figure 12

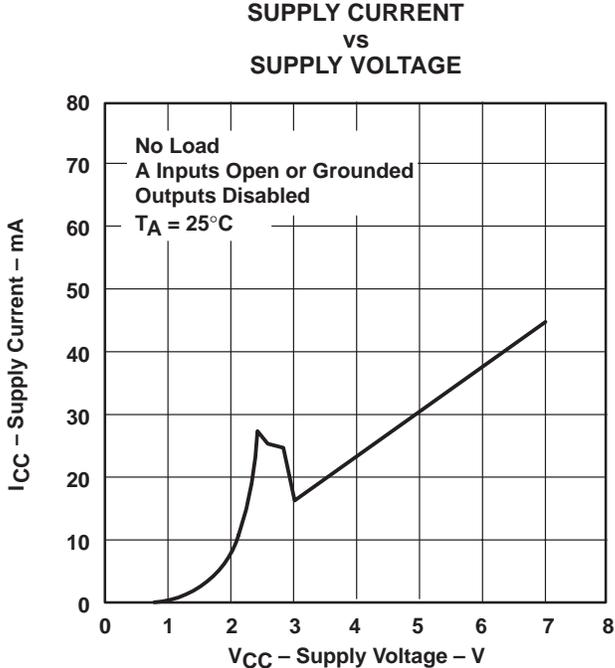


Figure 13

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current and complete.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.