

- ◆ N-Channel Power MOS FET
- ◆ DMOS Structure
- ◆ Low On-State Resistance : 0.03Ω (max)
- ◆ Ultra High-Speed Switching
- ◆ SOP - 8 Package
- ◆ Two FET Devices built-in

### General Description


The XP133A1330SR is a N-Channel Power MOS FET with low on-state resistance and ultra high-speed switching characteristics.

Two FET devices are built into the one package.


Because high-speed switching is possible, the IC can be efficiently set thereby saving energy.

The small SOP-8 package makes high density mounting possible.

### Pin Configuration

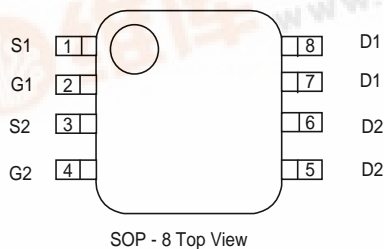

### Equivalent Circuit

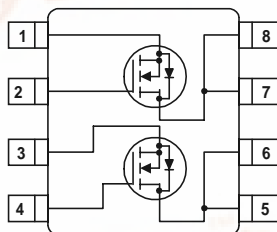

N - Channel MOS FET  
( 2 FET devices built-in )

### Applications

- Notebook PCs
- Cellular and portable phones
- On - board power supplies
- Li - ion battery systems

### Features

**Low on-state resistance** :  $R_{ds(on)} = 0.03\Omega$  (  $V_{gs} = 4.5V$  )  
 $R_{ds(on)} = 0.04\Omega$  (  $V_{gs} = 2.5V$  )  
 $R_{ds(on)} = 0.07\Omega$  (  $V_{gs} = 1.5V$  )

**Ultra high-speed switching**

**Operational Voltage** : 1.5V

**High density mounting** : SOP - 8

### Pin Assignment

PIN NUMBER	PIN NAME	FUNCTION
1	S1	Source
2	G1	Gate
3	S2	Source
4	G2	Gate
5 - 6	D2	Drain
7 - 8	D1	Drain

### Absolute Maximum Ratings

Ta=25°C

PARAMETER	SYMBOL	RATINGS	UNITS
Drain - Source Voltage	V <sub>dss</sub>	20	V
Gate - Source Voltage	V <sub>gss</sub>	± 8	V
Drain Current (DC)	I <sub>d</sub>	6	A
Drain Current (Pulse)	I <sub>dp</sub>	20	A
Reverse Drain Current	I <sub>dr</sub>	6	A
Continuous Channel Power Dissipation (note)	P <sub>d</sub>	2	W
Channel Temperature	T <sub>ch</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	- 55 to 150	°C

( note ) : When implemented on a glass epoxy PCB

### Electrical Characteristics

#### DC characteristics

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Drain Cut-off Current	Idss	Vds = 20 , Vgs = 0V			10	μA
Gate-Source Leakage Current	Igss	Vgs = ± 8 , Vds = 0V			± 1	μA
Gate-Source Cut-off Voltage	Vgs ( off )	Id = 1mA , Vds = 10V	0.5		1.2	V
Drain-Source On-state Resistance ( note )	Rds ( on )	Id = 3A , Vgs = 4.5V		0.025	0.03	Ω
		Id = 3A , Vgs = 2.5V		0.03	0.04	Ω
		Id = 1A , Vgs = 1.5V		0.045	0.07	Ω
Forward Transfer Admittance ( note )	Yfs	Id = 3A , Vds = 10V		20		S
Body Drain Diode Forward Voltage	Vf	If = 6A , Vgs = 0V		0.85	1.1	V

( note ) : Effective during pulse test.

#### Dynamic characteristics

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Capacitance	Ciss	Vds = 10V , Vgs = 0V f = 1 MHz		950		pF
Output Capacitance	Coss			430		pF
Feedback Capacitance	Crss			180		pF

#### Switching characteristics

Ta=25°C


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Turn-on Delay Time	td ( on )	Vgs = 5V , Id = 3A Vdd = 10V		15		ns
Rise Time	tr			20		ns
Turn-off Delay Time	td ( off )			80		ns
Fall Time	tf			15		ns

#### Thermal characteristics


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Thermal Resistance ( channel - surroundings )	Rth ( ch - a )	Implement on a glass epoxy resin PCB		62.5		°C / W

## Electrical Characteristics


Drain Current vs. Drain/Source Voltage

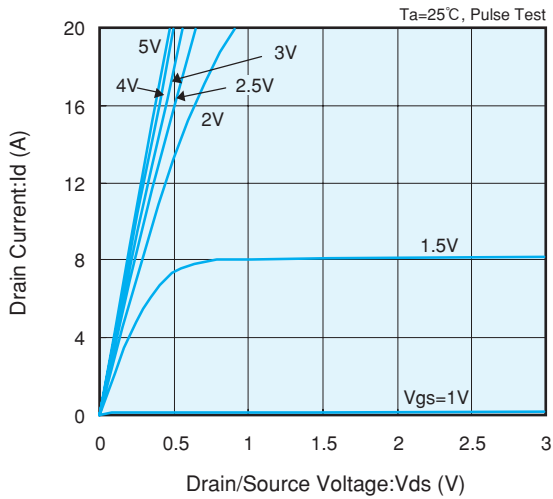


Drain Current vs. Gate/Source Voltage

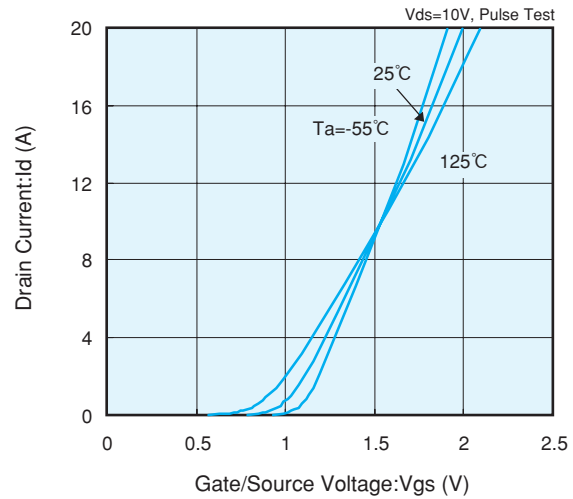


Drain/Source On-State Resistance vs. Gate/Source Voltage

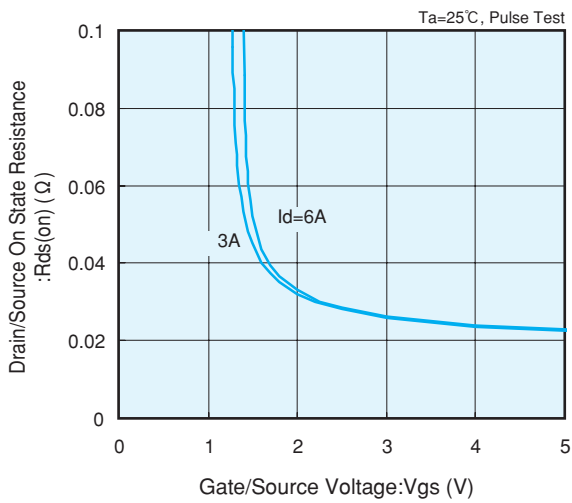


Drain/Source On-State Resistance vs. Drain Current

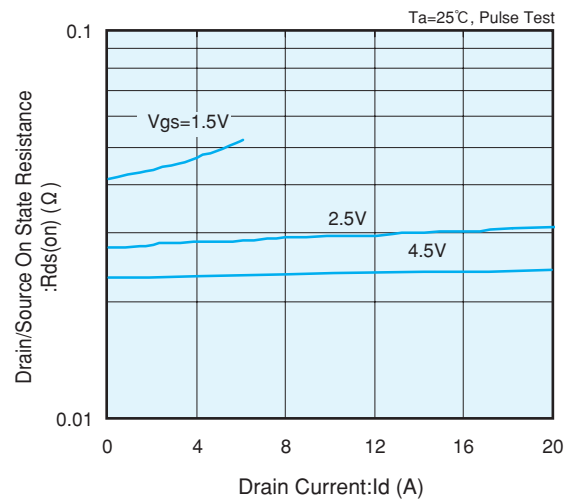

Drain/Source On-State Resistance vs. Ambient Temperature

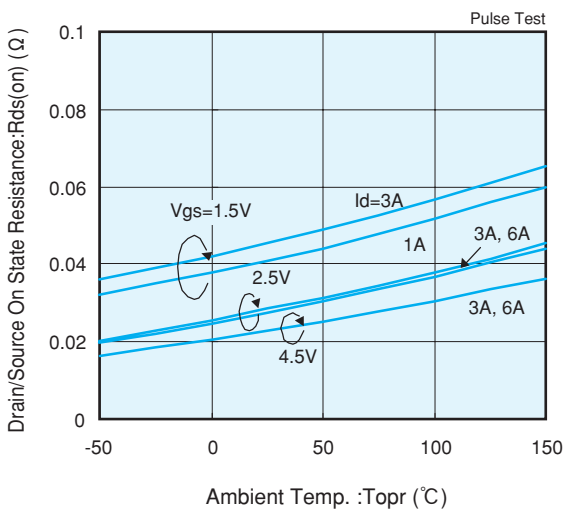


Gate/Source Cut-Off Voltage Variance vs. Ambient Temperature

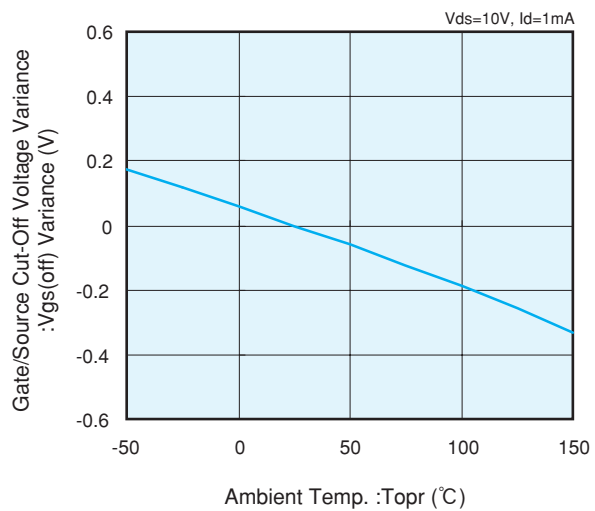


### Electrical Characteristics


Capacitance vs. Drain/Source Voltage

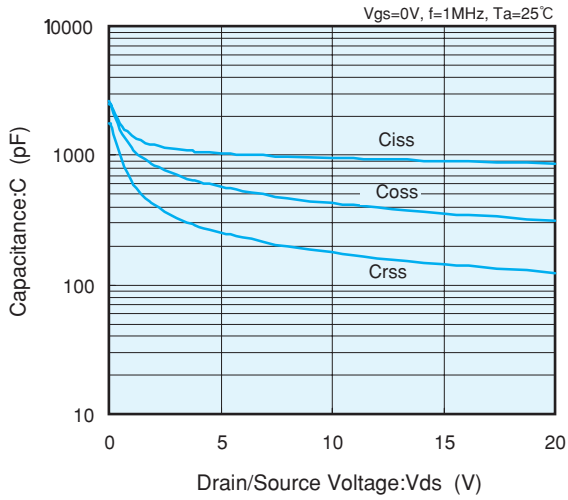


Switching Time vs. Drain Current

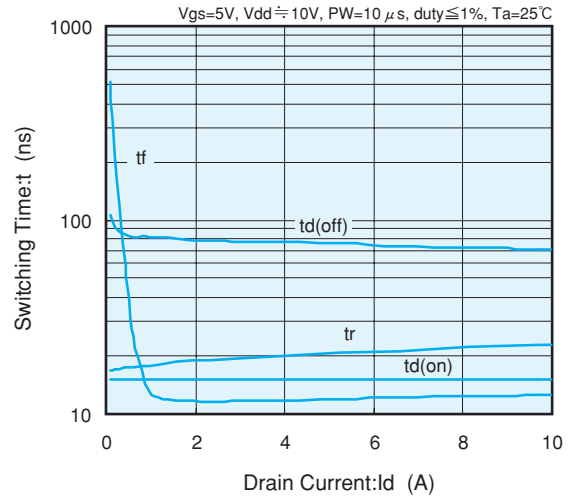

Gate/Source Voltage vs. Gate Charge

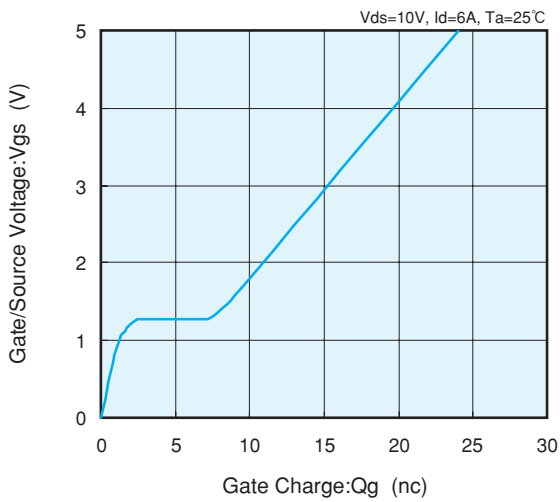

Reverse Drain Current vs. Source/Drain Voltage

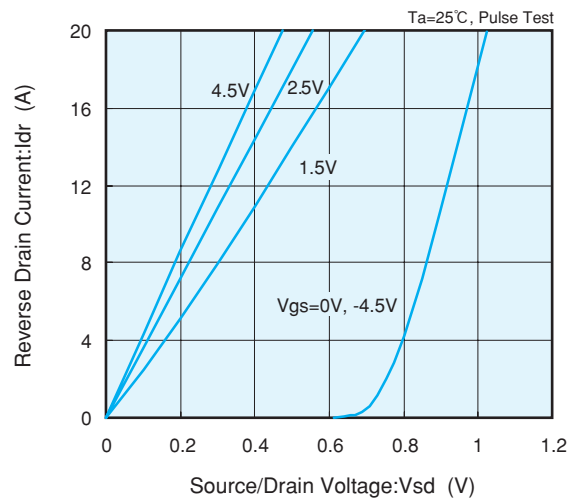

Standardized Transition Thermal Resistance vs. Pulse Width

