

DOLBY PRO LOGIC SURROUND DECODER

DESCRIPTION


M69032P IC was developed for dolby pro logic surround systems.

This IC has almost all functions necessary for dolby pro logic surround decoders, such as input autobalance, noise sequencer and adaptive matrix. By combining this IC with M65830BP/FP digital delay IC, a 2 chip dolby prologic surround system can be formed.

Note: This device is produced under the license of Dolby Laboratories Licensing Corporation. This device is available only to licensees of Dolby Laboratories Licensing Corporation. Dolby and  are the registered trademarks of dolby laboratories licensing corporation.

FEATURES

- Has almost all functions necessary for dolby prologic surround decoders
- Input autobalance
- Input buffer
- Noise sequencer ;
controls noise generator in sequence with 2-bit digital data
- Adaptive matrix
- Center mode control
Switches between ON and OFF, as well as between NORMAL, PHANTOM and WIDEBAND
- Modified dolby B type noise reduction
- Operation mode control
4-channel (left, right, center, surround), 3-channel (left, right, and center), 2-channel (input through)
- L + R output and L - R output

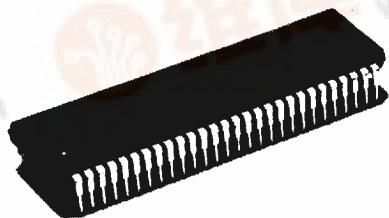


Outline 56SDIP

RECOMMENDED OPERATING CONDITIONS

Supply voltage range..... Vcc = 9 to 13V
Rated supply voltage..... Vcc = 12V


SYSTEM CONFIGURATION

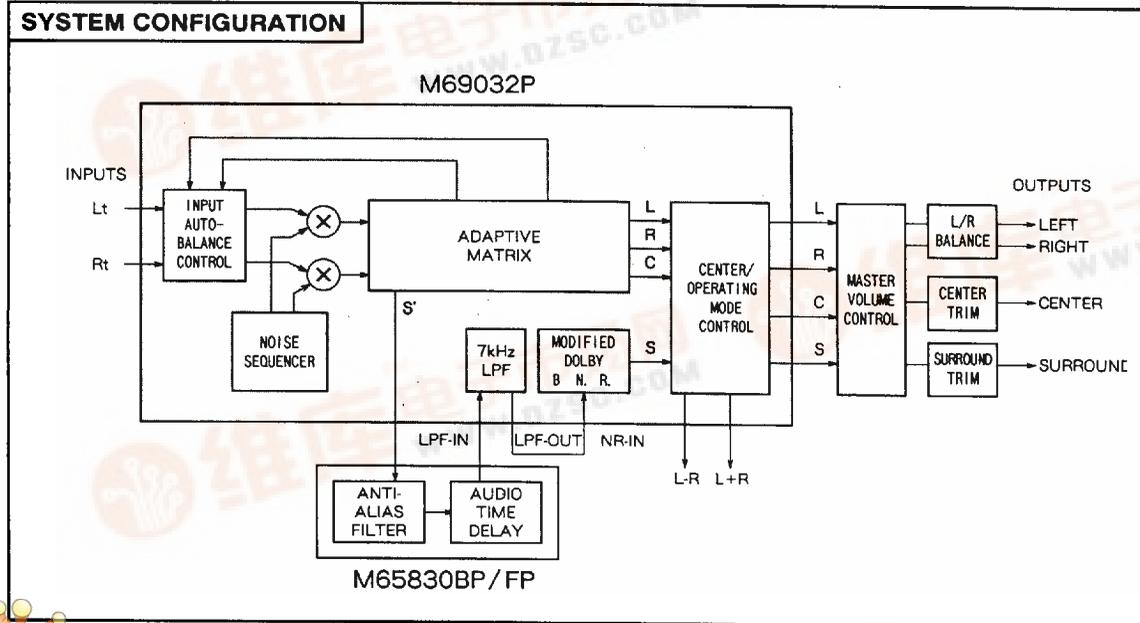

M69032P


DOLBY PRO LOGIC SURROUND DECODER

PIN CONFIGURATION (TOP VIEW)

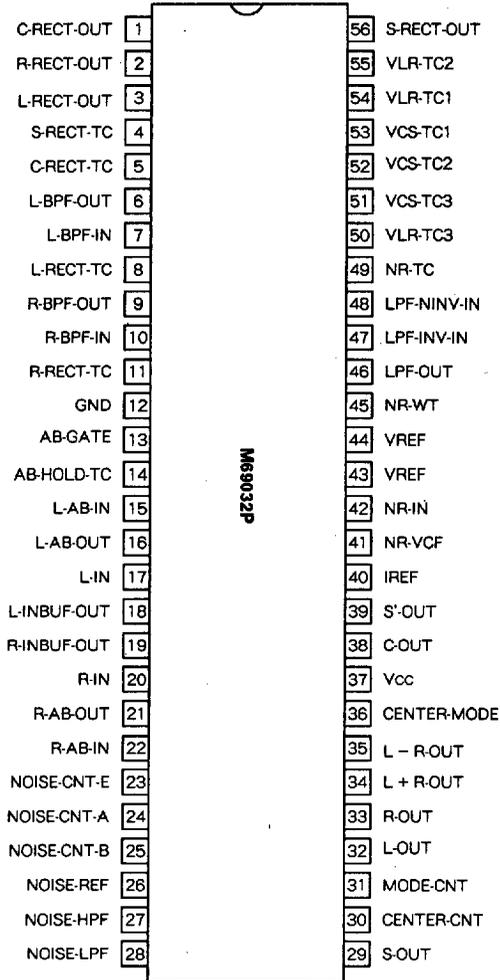

Outline 56SDIP

IC INTERNAL BLOCK DIAGRAM

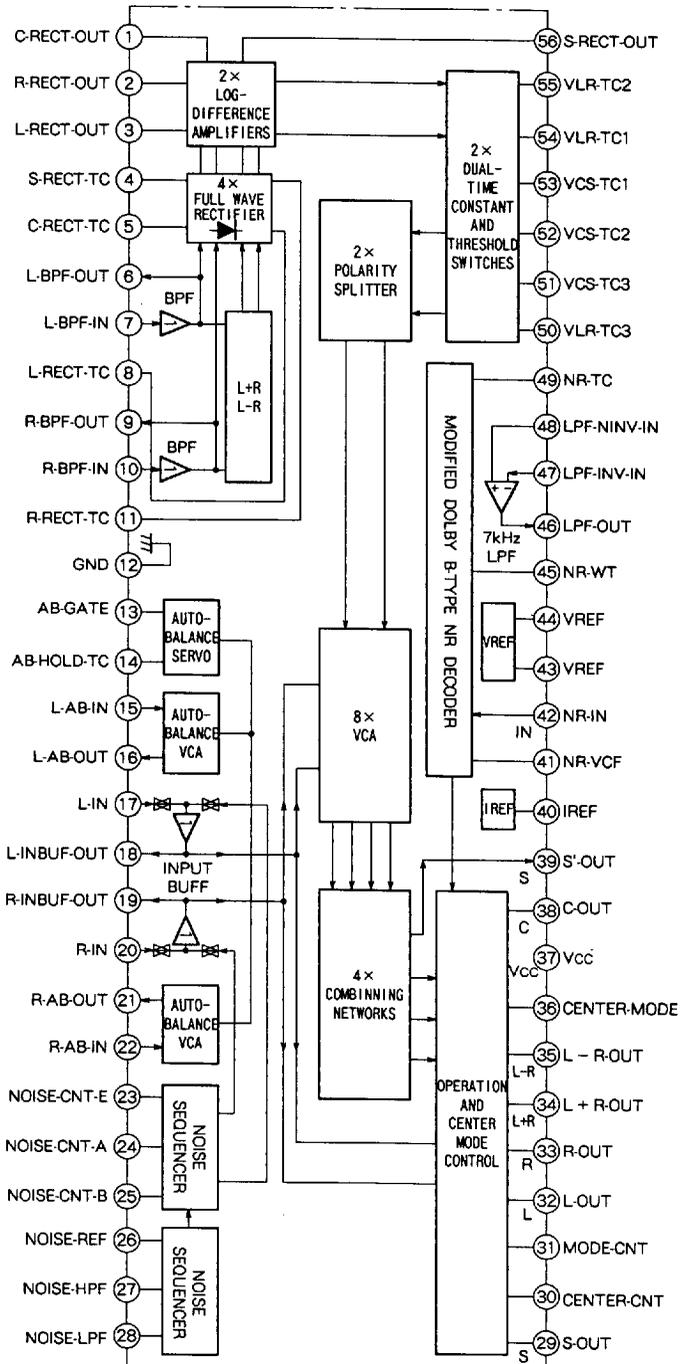

DOLBY PRO LOGIC SURROUND DECODER

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C, unless otherwise noted)

Symbol	Parameter	Ratings	Unit
V _{cc}	Supply voltage	15	V
P _d	Power dissipation	700	mW
T _{opr}	Operating temperature	-20 to +75	°C
T _{stg}	Storage temperature	-40 to +125	°C

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter		Test conditions	Limits			Unit	
				Min	Typ	Max		
V _{op}	Supply voltage			9.0	12.0	13.0	V	
I _{cc}	Circuit current		No signal	-	34.0	40.0	mA	
V _{ref}	Reference voltage		No signal	3.5	4.0	4.4	V	
V _{o2ch}	Control SW threshold	2ch mode	MODE-CNT PIN	0.0	-	0.8	V	
V _{o3ch}		3ch mode	MODE-CNT PIN	-	OPEN	-	-	
V _{o4ch}		4ch mode	MODE-CNT PIN	3.8	-	7.0	V	
V _{occon}		Center on/off		CENTER-CNT PIN	2.4	-	7.0	V
V _{ocof}				CENTER-CNT PIN	0.0	-	0.8	V
V _{onon}		Noise seq. on/off		NOISE-CNT-E PIN	0.0	-	0.8	V
V _{onof}				NOISE-CNT-E PIN	3.2	-	7.0	V
V _{cnsh}	Noise seq. channel select	H	NOISE-CNT-A and NOISE-CNT-B PIN	3.2	-	7.0	V	
V _{cnsl}		L	NOISE-CNT-A and NOISE-CNT-B PIN	0.0	-	0.8	V	

ELECTRICAL CHARACTERISTICS (Ta = 25°C, V_{cc} = 12V, 0dB Reference is 300mV/1kHz at C-OUT, unless otherwise noted)

1. MODIFIED B NOISE REDUCTION (0dB Reference is 300mV/100Hz at S-OUT)

Symbol	Parameter		Test conditions	Limits			Unit
				Min	Typ	Max	
GV-NR	Voltage gain		V _{in} = 0dB, f = 100Hz	-	9.0	-	dB
Dec1	Decode Responce		V _{in} = 0dB, f = 1kHz	-1.6	-0.1	1.4	dB
Dec2			V _{in} = -15dB, f = 1.4kHz	-3.0	-1.5	0.0	dB
Dec3			V _{in} = -20dB, f = 1.4kHz	-4.9	-3.4	-1.9	dB
Dec4			V _{in} = -40dB, f = 5kHz	-6.8	-5.3	-3.8	dB
THD-NR	T.H.D		V _{in} = 0dB, f = 1kHz	-	0.07	0.3	%
HR-NR	Headroom		V _{cc} = 9V at THD = 1%	15.0	17.0	-	dB
SN-NR	S.N Ratio		R _g = 0Ω, weighted CCIR/ARM	76	82	-	dB

2. NOISE SEQUENCER

Symbol	Parameter		Test conditions	Limits			Unit
				Min	Typ	Max	
V _{no}	Output noise level			-15	-12.5	-10	dB
V _{no-L}	Output noise level accuracy relative to Cch	L ch		-0.5	0.0	0.5	dB
V _{no-R}		R ch		-0.5	0.0	0.5	dB
V _{no-S'}		S' ch		-0.5	0.0	0.5	dB

DOLBY PRO LOGIC SURROUND DECODER

3. ADAPTIVE MATRIX

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
Vol	Output level accuracy relative to Cch L, R, S'ch out		- 0.5	0	0.5	dB
Mr	Matrix rejection relative to Lch R, C, S'ch out		25.0	40.0	-	dB
THD-AM	T.H.D L, R, C, S'ch out		-	0.02	0.20	%
HR-AM	Headroom L, R, C, S'ch out	V _{CC} = 9V at T.H.D = 1%	15.0	15.7	-	dB
SN-AM	Signal to noise ratio L, R, C, S'ch out	R _g = 0 Ω, weighted CCIR/ARM	76	83	-	dB

4. AUTO BALANCE

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
CPR	Capture range		-	± 5	-	dB
CER	Error collection		-	± 4	-	dB
THD-AB	T.H.D Lt, Rt, out		-	0.03	0.20	%
HR-AB	Headroom Lt, Rt, out	V _{CC} = 9V at T.H.D = 1%	15.0	17.0	-	dB
SN-AB	S/N Lt, Rt, out	R _g = 0 Ω, weighted CCIR/ARM	78	83	-	dB

5. L+R & L-R OUTPUT

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
Vol-OP	Output level accuracy relative to Cch L + R, L - R ch		- 1.0	0	1.0	dB
THD-OP	T.H.D		-	0.02	0.20	%
HR-OP	Headroom	V _{CC} = 9V at T.H.D = 1%	15.0	17.0	-	dB
SN-OP	S/N	R _g = 0 Ω, weighted CCIR/ARM	76	92	-	dB

FUNCTION DIAGRAMS

1. OPERATION MODE

Mode	Pin name (Pin No)	MODE-CNT (Pin ⑩)	Note
2CH (Lt,Rt,S')	L	L	S' = Lt - Rt or Noise
3CH (L,C,R,S')	High Z	H	S' = Lt - Rt or Noise
4CH (L,C,R,S'S)	H	H	

3. NOISE SEQUENCER

Mode	Pin name (Pin No)	NOISE-CNT-E (Pin ⑬)	NOISE-CNT-A (Pin ⑭)	NOISE-CNT-B (Pin ⑮)
Signal select		H	X	X
Noise L		L	L	L
Noise C		L	L	H
Noise R		L	H	L
Noise S		L	H	H

2. CENTER MODE

Mode	Pin name (Pin No)	CENTER-CNT (Pin ⑨)	CENTER-MODE (Pin ⑮)
Center off		L	X
Normal		H	0.22 μF
Phantom		H	OPEN
Wideband		H	10 μF

PIN DESCRIPTION

Pin No.	Name	Function	Voltage	Description	Equivalent circuit
⑮	L - AB - IN	Autobalance, L-ch input	4V	Autobalance amplifier input pins. Noninverting operational amplifier is applied to these pins. To provide DC bias, pull them up by connecting external resistance (R111, 112: 22kΩ to 75kΩ) to Vref.	
⑯	R - AB - IN	Autobalance, R-ch input	4V		
⑰	L - AB - OUT	Autobalance, L-ch output	4V	Autobalance amplifier output pins. They are controlled from adaptive matrix, so that signals are output with the imbalance between right and left corrected. They are normally direct-connected to, respectively, L-IN and R-IN described below.	
⑱	R - AB - OUT	Autobalance, R-ch output	4V		
⑲	L - IN	L-ch input	4V	Adaptive matrix input circuit. Noninverting operational amplifier is applied to the input pins. To provide DC bias, pull them up by connecting external resistance (22kΩ to 75kΩ) to VREF if they are not directly connected to the autobalance output pins described above.	
⑳	R - IN	R-ch input	4V		
㉑	L - INBUF - OUT	L-ch input Buffer output	4V		
㉒	R - INBUF - OUT	R-ch input Buffer output	4V		
㉓	L - OUT	L-ch output	4V	These pins output R-/L-channel inputs as they are when the operation mode is 2-channel. If the mode is 3-channel, these pins output Dolby 3 stereo R-/L-channel signals. When the mode is 4-channel, they output Dolby prologic R-/L-channel signals.	
㉔	R - OUT	R-ch output	4V		
㉕	C - OUT	C-ch output	4V	Does not output any signals when the operation mode is 2-channel or when the center mode is OFF or set to PHANTOM.	

DOLBY PRO LOGIC SURROUND DECODER

PIN DESCRIPTION (continued)

Pin No.	Name	Function	Voltage	Description	Equivalent circuit
33	S' - OUT	Surround channel output	4V	Surround channel output precedent to delay generator. Always outputs signals, irrespective of the operation mode (2-/3-/4-channel).	
34	L + R - OUT	L-channel and R-channel summing output	4V	Pin L + R - OUT outputs the sum of L-channel and R-channel signals that do not go through adaptive matrix.	
35	L - R - OUT	L-channel and R-channel subtraction output	4V	Pin L + R - OUT outputs the difference between them. These pin always output signals, irrespective of the operation mode (2-/3-/4-channel).	
47	LPF - INV - IN	LPF inverted input	4V	Operational amplifier. This amplifier forms a 7kHz low-pass filter (LPS) with external components. Connect the noninverted input pin to VREF to form an LPS in the inverting amplifier style, and input signals by AC coupling (or by DC coupling if surround output is directly connected to LPS without delay generator).	
48	LPF - NINV - IN	LPF noninverted input	4V		
49	LPF - OUT	LPF output	4V		
42	NR - IN	Modified B-type noise reduction input	4V	B-type noise reduction input pin. Connect directly to LPF-OUT in normal cases as shown in the application example. To input signals directly, connect by AC coupling, because noninverting operational amplifier is applied to this pin. Please note that the input/output phase is inverted at 180° in this case.	
28	S - OUT	Surround output	4V	This pin outputs surround signals decoded by modified B-type noise reduction. Outputs signals only when the mode is 4-channel. (Outputs 4-V DC in the 2- or 3-channel mode.) There is a gain of approximately 9dB between this output and noise reduction input. When connecting delay generator behind modified B-type noise reduction, lower the gain by approximately 9dB at the LPF.	

DOLBY PRO LOGIC SURROUND DECODER

PIN DESCRIPTION (continued)

Pin No.	Name	Function	Voltage	Description	Equivalent circuit
⑫	NOISE - CNT - E	Signal noise selection		This pin controls the switchover between adjusting noise and signal. Control input voltage should be between 0V to 8V.	
⑬	NOISE - CNT - A	Noise output destination selection		These pin switches adjusting noise output destination according to 2-bit digital data. Control input voltage should be between 0V to 8V.	
⑭	NOISE - CNT - B	Noise output destination selection			
⑮	CENTER - CNT	C-ch channel ON/OFF switching		Controls the center channel (ON/OFF). Control input voltage should be between 0V to 8V.	
⑯	MODE - CNT	2-/3-/4-channel switching		Controls the operation mode (2-/3-/4-channel). Control input voltage should be between 0V to 8V. Set to open in the 3-channel mode.	

TEST CONDITIONS

1) Mode sequence

Noise	PPVI 5	PPVI 6	PPVI 7
OFF	H	X	X
L	L	L	L
C	L	L	H
R	L	H	L
S'	L	H	H

Channel mode	PPVI 3
2ch	L
3ch	Open
4ch	H

CENTER	PPVI 4	K9
OFF	L	X
ON	H	X
P	H	OFF
W	H	ON

Auto balance	K19
OFF	ON
ON	OFF

Note1. For noise sequencer, set K10 to ON except for VNO(white noise).


2) Input selection switch conditions

Function	K1	K2	K3	K4	K5	K6	K7	K8	K10	K20	K21
OFF	X	X	X	OFF	X	X	OFF	OFF	OFF	OFF	OFF
ATT 1/1	OFF	X	X	X	X	X	X	X	X	X	X
ATT 1/10	ON	X	X	X	X	X	X	X	X	X	X
L	X	X	X	OFF	OFF	X	OFF	ON	OFF	OFF	OFF
C	X	OFF	X	OFF	ON	OFF	ON	ON	OFF	OFF	OFF
R	X	X	X	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
S'	X	OFF	X	OFF	ON	ON	ON	ON	OFF	OFF	OFF
S : Dolby	X	X	X	ON	X	X	OFF	OFF	OFF	OFF	OFF
LL : Collection level	X	OFF	X	OFF	ON	ON	ON	ON	OFF	OFF	OFF
CP : Capture range	X	ON	X	OFF	ON	ON	ON	ON	OFF	OFF	OFF
CNT1 : Field through	X	X	ON	OFF	X	X	OFF	OFF	OFF	ON	OFF
CNT2 : Field through	X	X	ON	OFF	X	X	OFF	OFF	OFF	OFF	ON

M69032P







DOLBY PRO LOGIC SURROUND DECODER


TEST CIRCUIT

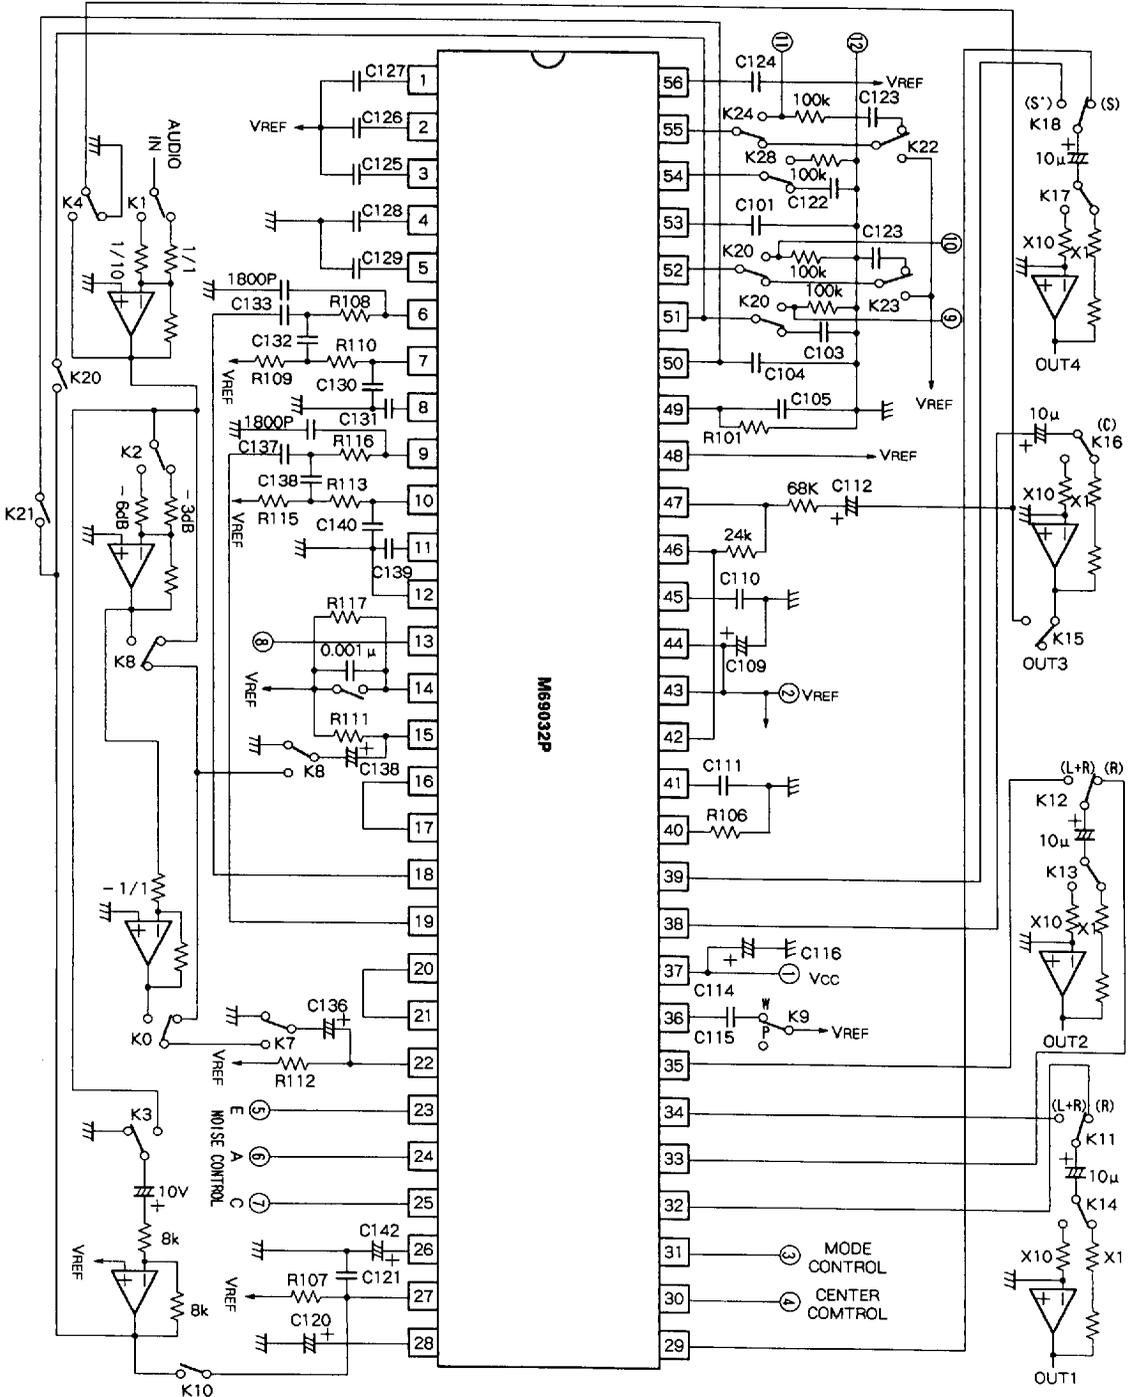

6249826 0022056 357

TYPICAL CHARACTERISTICS

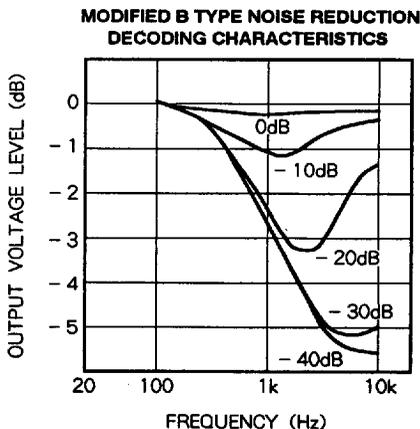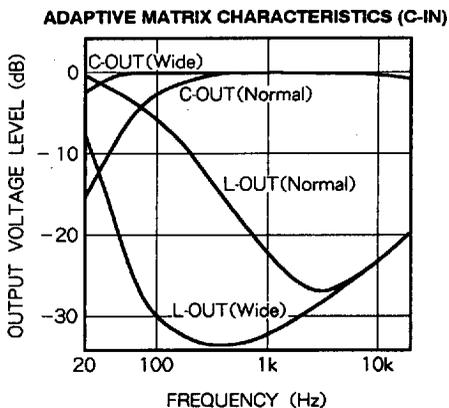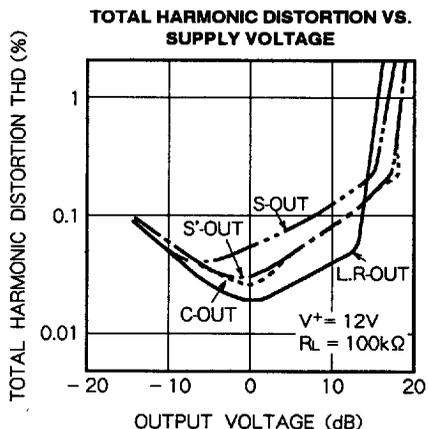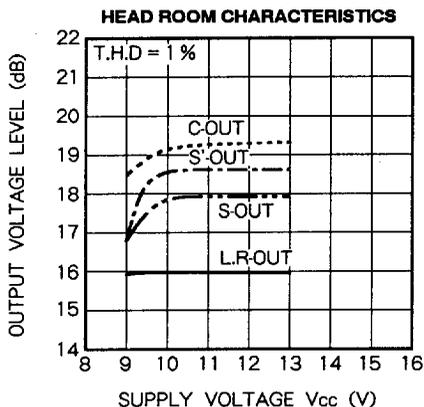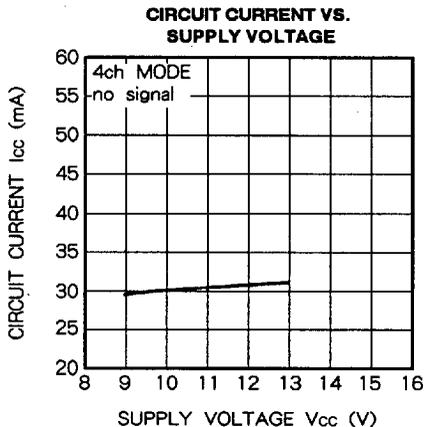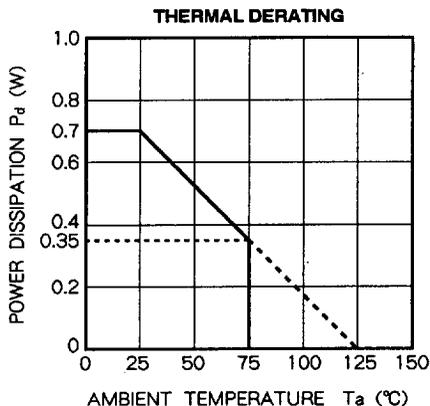

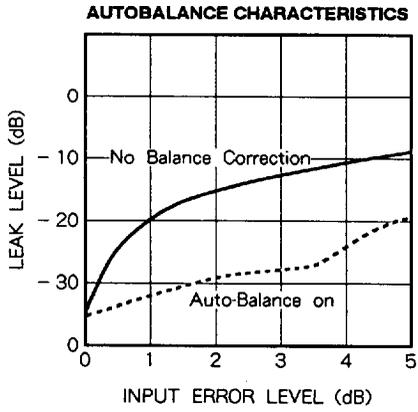

OPTIONAL PARTS LIST


1. M69032P application circuits

PARTS NO.	VALUE	TOL.		PARTS NO.	VALUE	TOL.		PARTS NO.	VALUE	TOL.	
C 101	4.7 μ F	20%		C 123	0.22 μ F	10%		R 101	330k Ω	10%	
C 102	0.22 μ F	10%		C 124	0.1 μ F	20%		R 102	8.2k Ω		
C 103	0.22 μ F	10%		C 125	0.1 μ F	20%		R 103	8.2k Ω	5%	
C 104	0.22 μ F	10%		C 126	0.1 μ F	20%		R 104	8.2k Ω	5%	
C 105	0.68 μ F	10%		C 127	0.1 μ F	20%		R 105	15k Ω	5%	
C 106	5600pF	10%		C 128	0.022 μ F	5%		R 106	100k Ω	1%	
C 107	4700pF	10%		C 129	0.022 μ F	5%		R 107	100k Ω	5%	
C 108	470pF	10%		C 130	680pF	5%		R 108	7.5k Ω	5%	
C 109	220 μ F	10%	$\geq 150 \mu$ F	C 131	0.047 μ F	5%		R 109	15k Ω	5%	
C 110	0.047 μ F	5%		C 132	0.1 μ F	5%		R 110	47k Ω	5%	
C 111	5600pF	5%		C 133	0.1 μ F	5%		R 111	22k Ω		
C 112	10 μ F			C 135	10 μ F			R 112	22k Ω		
C 113	10 μ F			C 136	10 μ F			R 113	47k Ω	5%	
C 114	0.22 μ F	10%		C 137	0.1 μ F	5%		R 115	15k Ω	5%	
C 115	10 μ F	10%		C 138	0.1 μ F	5%		R 116	7.5k Ω	5%	
C 116	100 μ F		$\geq 100 \mu$ F	C 139	0.047 μ F	5%		R 117	10M Ω	10%	
C 117	10 μ F			C 140	680pF	5%					
C 118	10 μ F			C 141	10 μ F	20%	Low leak				
C 119	10 μ F			C 142	10 μ F						
C 120	22 μ F	10%		C 143	10 μ F						
C 121	4700pF	5%		C 144	10 μ F						
C 122	4.7 μ F	20%									

2. M69032P & M65830BP/FP application circuits


PARTS NO.	VALUE	TOL.		PARTS NO.	VALUE	TOL.		PARTS NO.	VALUE	TOL.	
C 101	4.7 μ F	20%		C 131	0.047 μ F	5%		R 101	330k Ω	10%	
C 102	0.22 μ F	10%		C 132	0.1 μ F	5%		R 102	short		
C 103	0.22 μ F	10%		C 133	0.1 μ F	5%		R 103	15k Ω	5%	
C 104	0.22 μ F	10%		C 135	10 μ F			R 104	15k Ω	5%	
C 105	0.68 μ F	10%		C 136	10 μ F			R 105	15k Ω	5%	
C 106	open			C 137	0.1 μ F	5%		R 106	100k Ω	1%	
C 107	2200pF	10%		C 138	0.1 μ F	5%		R 107	100k Ω	5%	
C 108	470pF	10%		C 139	0.047 μ F	5%		R 108	7.5k Ω	5%	
C 109	220 μ F	10%	$\geq 150 \mu$ F	C 140	680pF	5%		R 109	15k Ω	5%	
C 110	0.047 μ F	5%		C 141	10 μ F	20%	Low leak	R 110	47k Ω	5%	
C 111	5600pF	5%		C 142	10 μ F			R 111	22k Ω		
C 112	1 μ F			C 143	10 μ F			R 112	22k Ω		
C 113	10 μ F			C 144	10 μ F			R 113	47k Ω	5%	
C 114	0.22 μ F	10%						R 115	15k Ω	5%	
C 115	10 μ F	10%						R 116	7.5k Ω	5%	
C 116	100 μ F		$\geq 100 \mu$ F	C 201	100 μ F			R 117	10M Ω	10%	
C 117	10 μ F			C 202	0.1 μ F			R 201	1M Ω		
C 118	10 μ F			C 203	100pF			R 202	15k Ω		
C 119	10 μ F			C 204	100pF			R 203	18k Ω		
C 120	22 μ F	10%		C 205	470pF			R 204	15k Ω		
C 121	4700pF	5%		C 206	3300pF			R 205	short		
C 122	4.7 μ F	20%		C 207	0.068 μ F			R 206	30 Ω		
C 123	0.22 μ F	10%		C 208	0.1 μ F			R 207	5.6k Ω		
C 124	0.1 μ F	20%		C 209	0.1 μ F			R 208	18k Ω		
C 125	0.1 μ F	20%		C 210	47 μ F			R 209	7.5k Ω		
C 126	0.1 μ F	20%		C 211	0.068 μ F			R 210	8.2k Ω		
C 127	0.1 μ F	20%		C 212	470pF						
C 128	0.022 μ F	5%		C 213	5600pF			X 201	2MHz		
C 129	0.022 μ F	5%		C 214	5600pF						
C 130	680pF	5%		C 215	1 μ F						

APPLICATION EXAMPLE

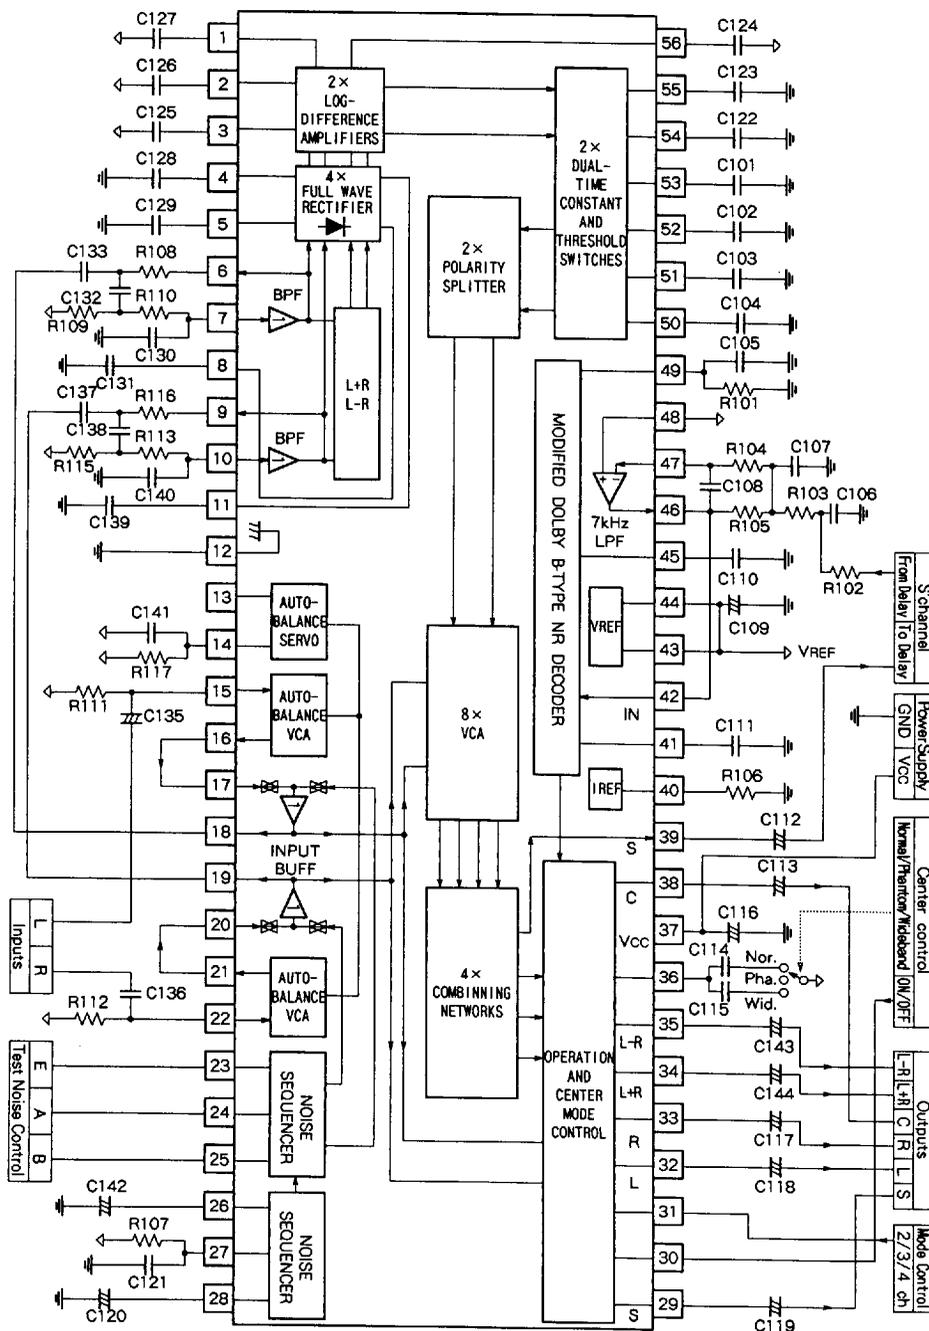

Units Resistance : Ω
Capacitance : F

M69032P & M65830BP/FP APPLICATION EXAMPLE

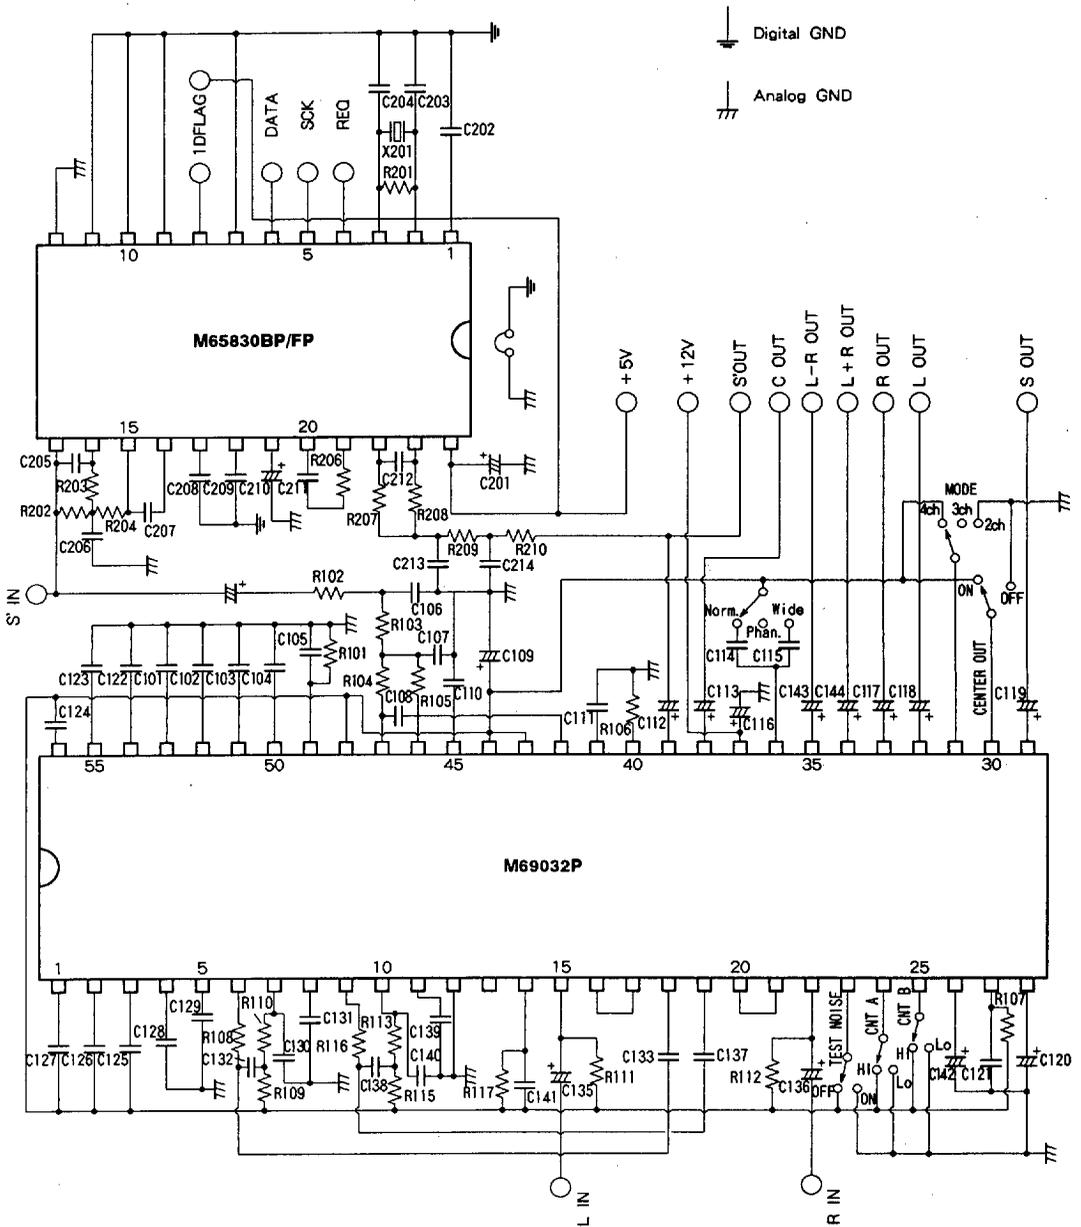

Units Resistance : Ω
Capacitance : F