

W55212B



SERIAL VOICE SRAM (256K · 1 BIT)


GENERAL DESCRIPTION

The W55212B is a normal speed, low power CMOS static RAM organized as 256K × 1 bit that operates on a single 5V power supply. Manufactured using Winbond's high performance CMOS technology, the W55212B is designed for extensive use in voice recording applications

FEATURES

- Single 3.6V to 5.5V power supply
- Low power consumption
- Fully static operation
- Low data retention voltage
- Easy to cascade


PIN CONFIGURATION

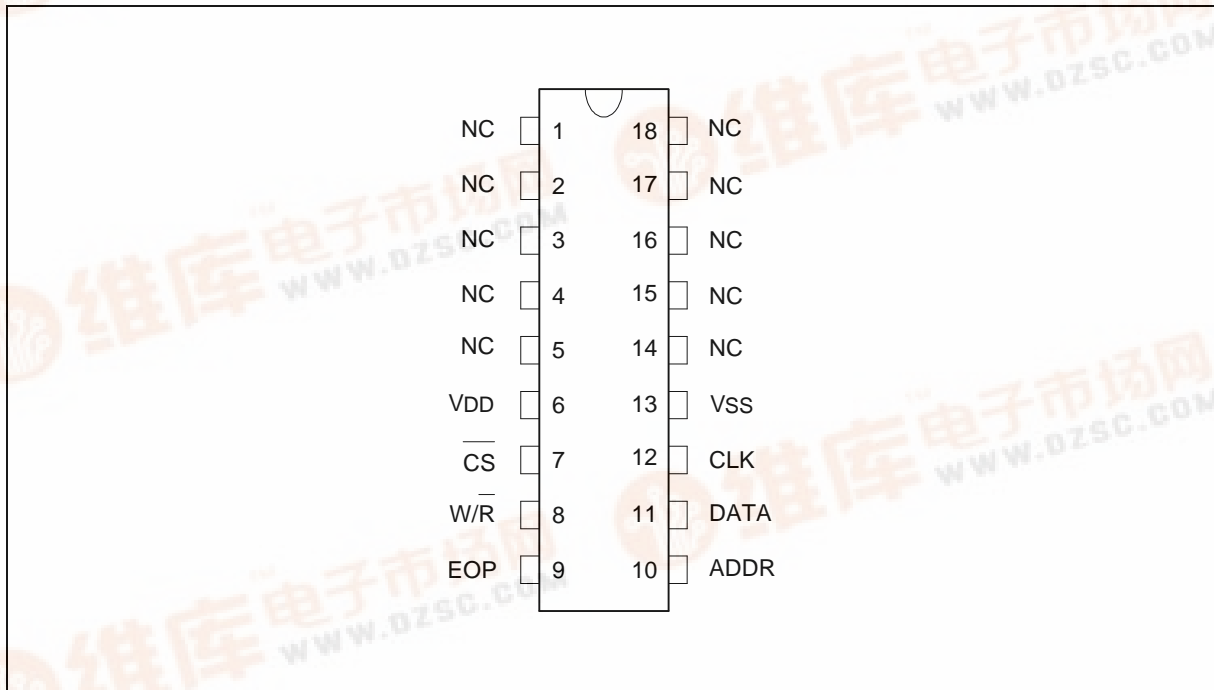

PIN DESCRIPTION

NO.	PIN	I/O	DESCRIPTION
6	VDD	PWR	Positive power supply
7	\overline{CS}	I	Chip-inhibit when $\overline{CS} = 1$; chip-select when $\overline{CS} = 0$ or open (with internal pull-low resistor)
8	W/\overline{R}	I	Write-in control when $W/\overline{R} = 1$, read-out control when $W/\overline{R} = 0$
9	EOP	O	End signal output
10	ADDR	I	Clock input for start address
11	DATA	B	Bidirectional data pin
12	CLK	I	Clock input for address increment
13	VSS	PWR	Ground

BLOCK DIAGRAM

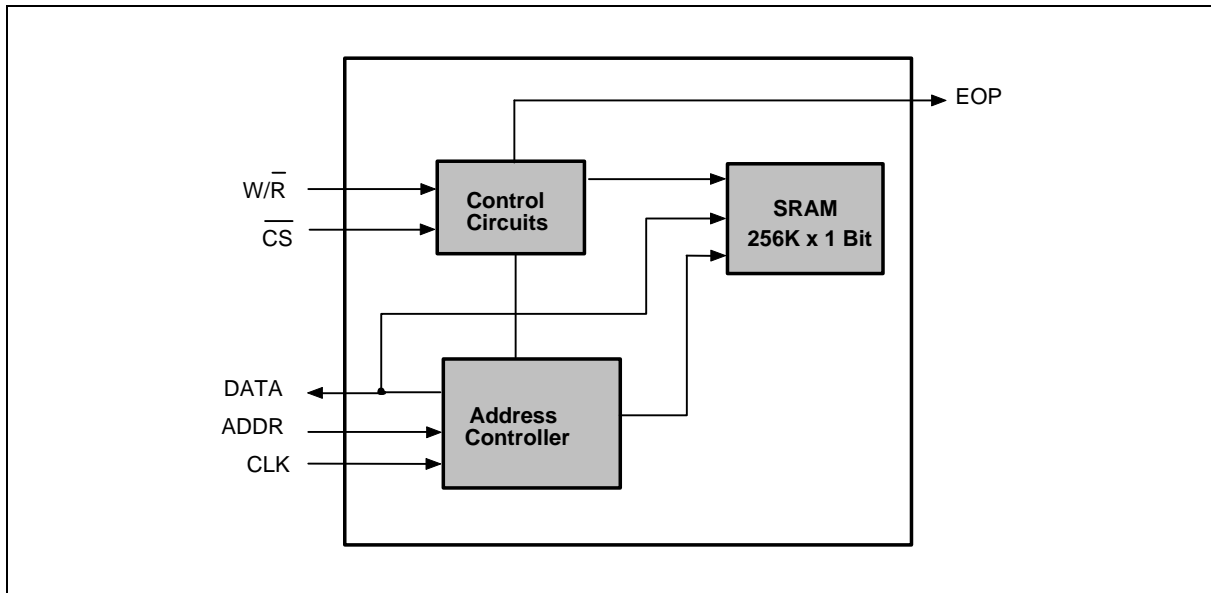

FUNCTIONAL DESCRIPTION

• TRUTH TABLE

\overline{CS}	W/\overline{R}	MODE	DATA PIN	VDD CURRENT
H	X	Note selected	High Z	ISB
L	H	Write	Data in	IOP
L	L	Read	Data out	IOP


- When the chip is unselected, the W/\overline{R} signal will be transmitted to the EOP pin.




- Before a read or write operation, the address counter must be reset by sending an ADDR pulse and DATA = 0.
- After power on, the read operation is disabled, and a read operation may be performed only after a write operation is completed.
- In write-in operation, the EOP signal will change from low to high and remain high when the final address of the chip is encountered. It will change to low again with the next ADDR pulse.
- In read-out operation, the EOP pin will generate one pulse signal when the final address of the SRAM chip is encountered.

The timing of the start address loading in write-in/read-out operation is shown below:


- Load start address for write-in/read-out operation:

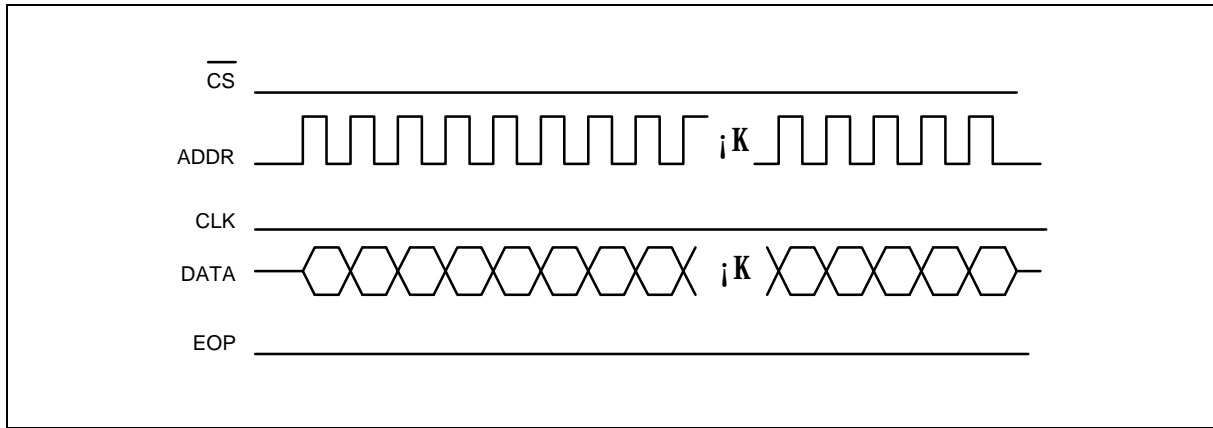


- Write-in operation:

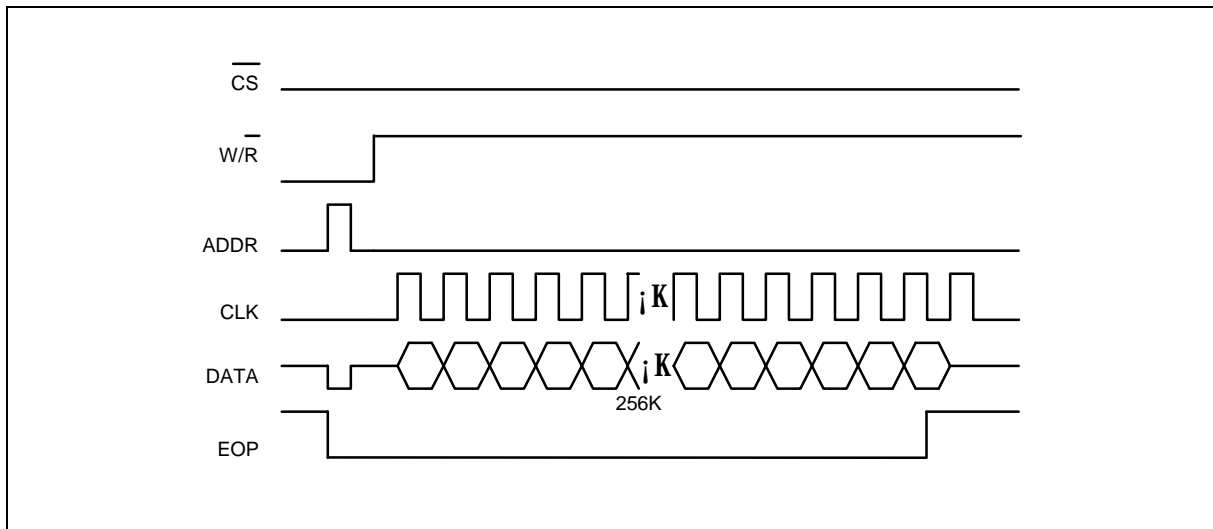

- Read-out operation:

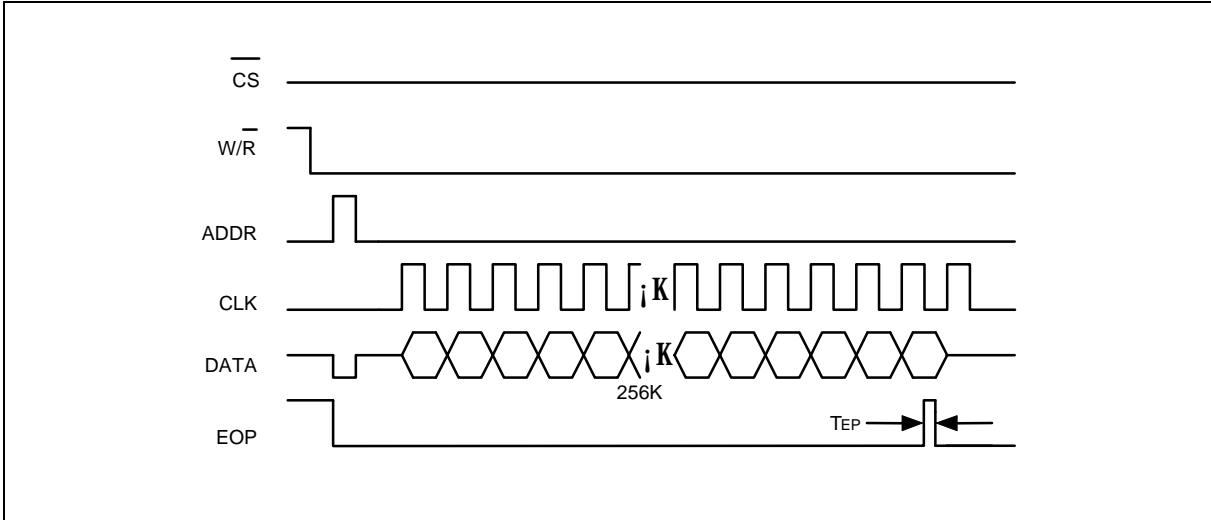

- No operation (standby):

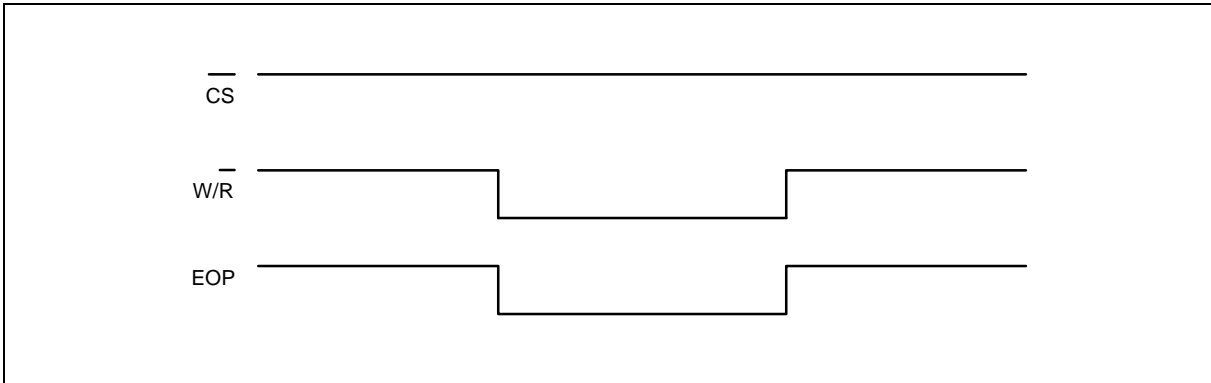

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage (VDD–VSS)	-	-0.3 to +5.5	V
Input Voltage	V _I	VSS -0.2 to VDD +0.2	V
Output Voltage	V _O	VSS to VDD	V
Operating Temperature	T _A	0 to +70	°C
Storage Temperature	T _S	-55 to +150	°C

Note: Exposure to conditions beyond those listed under Absolute Maximum Ratings may adversely affect the life and reliability of the device.

DC CHARACTERISTICS

W55212B



T_A = 25° C, V_{DD} = 5.0V, V_{SS} = 0.0V

PARAMETER	SYMBOL	CONDITIONS	LIMIT			UNIT
			MIN.	TYP.	MAX.	
Operating Voltage	V _{DD}	-	3.6	5.0	5.5	V
Operating Current	I _{OP}	F _c = 1 MHz	-	-	15	mA
V _{DD} for Data Retention	V _{DR}	$\overline{CS} \geq V_{DD} - 0.2V$	2.4	-	5.5	V
Data Retention Current	I _{DDDR}	V _{DD} ≥ 3V, $\overline{CS} \geq 2.8V$	-	-	10	μA
Standby Current	I _{SB}	-	-	2	10	μA
Input Voltage (for ADDR, CLK, W/R and \overline{CS} pins)	V _{IH}	-	2.8	-	6.0	V
	V _{IL}	-	-0.5	-	+0.8	
Input Current (for \overline{CS})	I _{IH}	V _I = 5.0V	-	-	5	μA
Output Current (for EOP)	I _{OH}	V _O = 4.0V	4	6	-	mA
	I _{OL}	V _O = 0.8V	-4	-8	-	


AC CHARACTERISTICS

T_a = 25° C, V_{DD} = 5.0V, V_{SS} = 0.0V

PARAMETER	SYM.	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Clock Frequency (for CLK and ADDR)	F _c	-	-	-	1	MHz
Data Hold Time	T _{WH}	Write mode	0	-	-	nS
Data Hold Time	T _{RH}	Read mode	0	-	-	ns
Data Hold Time (for ADDR)	T _{AH}	-	0	-	-	nS
Data Access Time	T _{RA}	Read mode	-	-	80	nS
Data Set up Time	T _{WS}	Write mode	250	-	-	nS
Data Set up Time (for ADDR)	T _{AS}	-	250	-	-	nS
EOP Pulse Width (for ADDR)	T _{EP}	Read mode	100	-	-	nS
High Level Duration of Clock for CLK and ADDR	T _H	-	400	-	-	nS
Low Level Duration of Clock for CLK and ADDR	T _L	-	600	-	-	nS
W/R Signal Set up Time for Write Mode	T _{SUR}	-	300	-	-	nS
W/R Signal Set up Time for Write Mode	T _{SUW}	-	300	-	-	nS
Time Width Between ADDR and CLK Clock	T _D	-	1	-	-	μS

TYPICAL APPLICATION CIRCUIT (For reference only)

W55212B

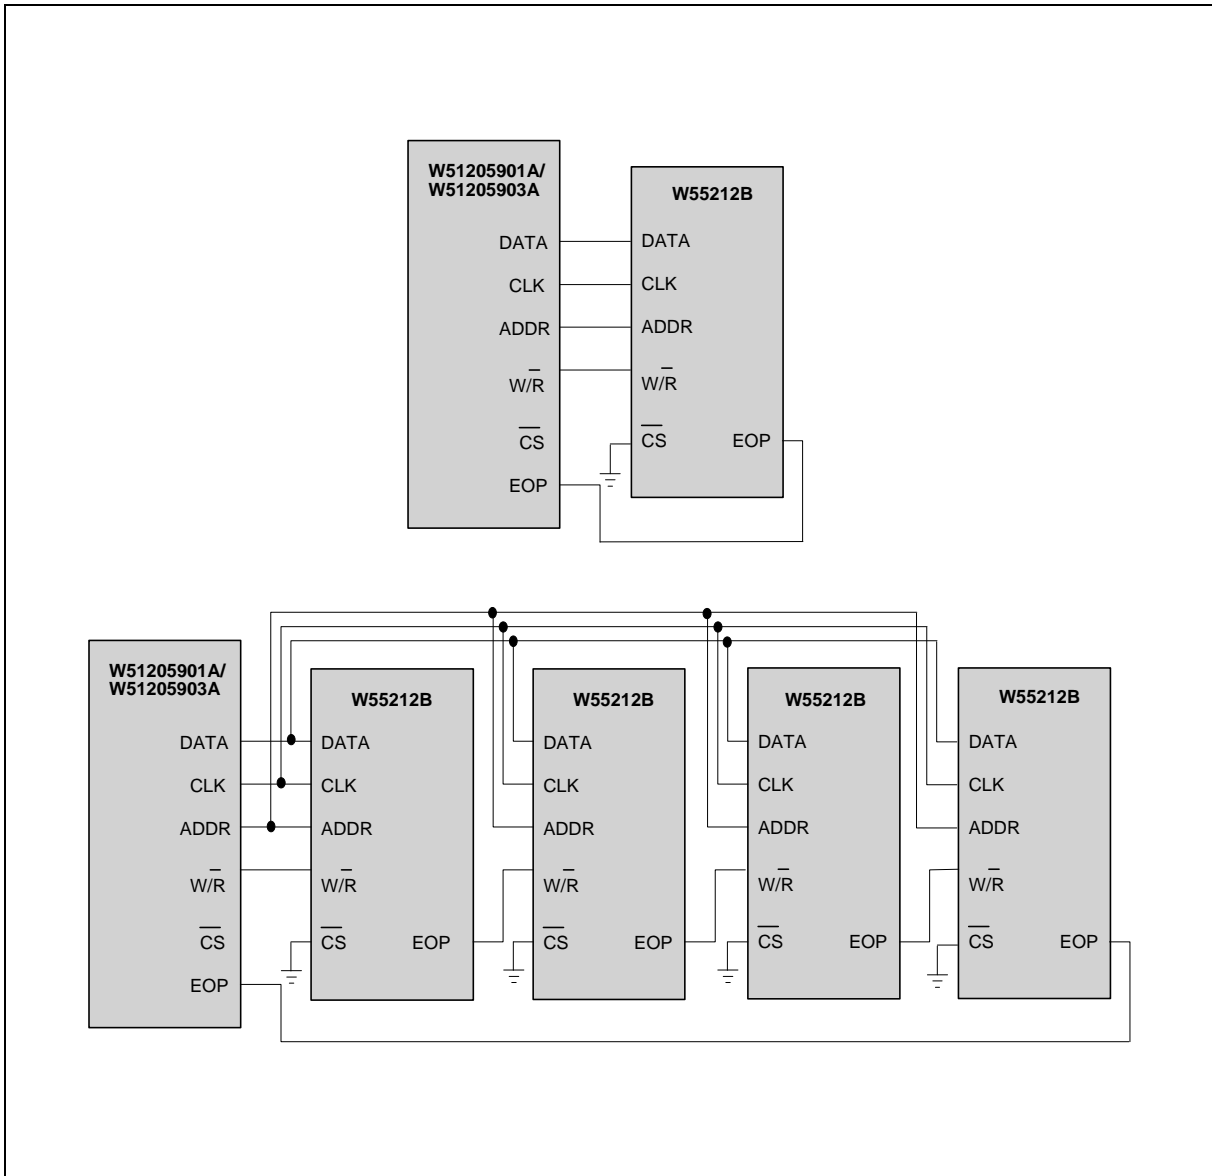

* W51205901A/W51205903A substrate connected to Vss for C.O.B.

* W55212B substrate connected to VDD for C.O.B.

W55212B



Headquarters

No. 4, Creation Rd. III,
Science-Based Industrial Park,
Hsinchu, Taiwan
TEL: 886-3-5770066
FAX: 886-3-5792697
<http://www.winbond.com.tw/>
Voice & Fax-on-demand: 886-2-7197006

Taipei Office

11F, No. 115, Sec. 3, Min-Sheng East Rd.,
Taipei, Taiwan
TEL: 886-2-7190505
FAX: 886-2-7197502

Winbond Electronics (H.K.) Ltd.

Rm. 803, World Trade Square, Tower II,
123 Hoi Bun Rd., Kwun Tong,
Kowloon, Hong Kong
TEL: 852-27513100
FAX: 852-27552064

Winbond Electronics North America Corp.

Winbond Memory Lab.
Winbond Microelectronics Corp.
Winbond Systems Lab.
2730 Orchard Parkway, San Jose,
CA 95134, U.S.A.
TEL: 1-408-9436666
FAX: 1-408-9436668

Note: All data and specifications are subject to change without notice.

Publication Release Date: September 1996
Revision A1