

2SK2085

Silicon N Channel MOS FET

Application

High speed power switching

Features

- Low on-resistance
- High speed switching
- Low drive current
- 4 V gate drive device can be driven from 5 V source
- Suitable for Switching regulator, DC – DC converter

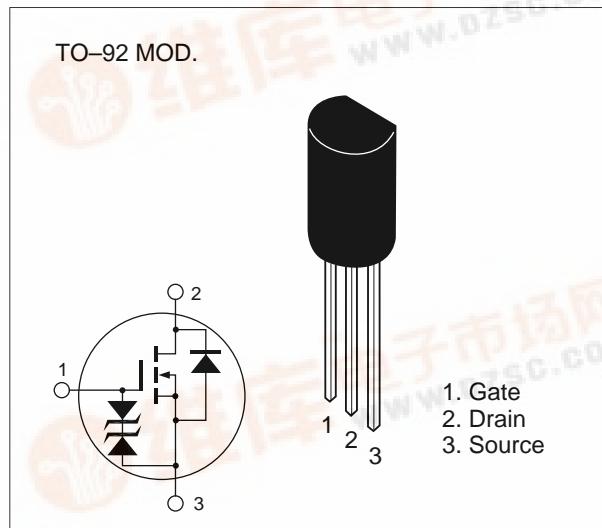


Table 1 Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Item	Symbol	Ratings	Unit
Drain to source voltage	V_{DSS}	100	V
Gate to source voltage	V_{GSS}	± 20	V
Drain current	I_D	1.0	A
Drain peak current	$I_{D(\text{pulse})}^*$	4.0	A
Body-drain diode reverse drain current	I_{DR}	1.0	A
Channel dissipation	P_{ch}^{**}	0.9	W
Channel temperature	T_{ch}	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$





* $PW \leq 10 \mu\text{s}$, duty cycle $\leq 1\%$





** Value at $T_c = 25^\circ\text{C}$





Table 2 Electrical Characteristics (Ta = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test conditions
Drain to source breakdown voltage	V _{(BR)DSS}	100	—	—	V	I _D = 10 mA, V _{GS} = 0
Gate to source breakdown voltage	V _{(BR)GSS}	±20	—	—	V	I _G = ±100 µA, V _{DS} = 0
Gate to source leak current	I _{GSS}	—	—	±10	µA	V _{GS} = ±16 V, V _{DS} = 0
Zero gate voltage drain current	I _{DSS}	—	—	100	µA	V _{DS} = 80 V, V _{GS} = 0
Gate to source cutoff voltage	V _{GS(off)}	1.0	—	2.0	V	I _D = 1 mA, V _{DS} = 10 V
Static drain to source on state resistance	R _{DS(on)}	—	0.6	0.9	Ω	I _D = 0.5 A V _{GS} = 10 V *
		—	0.75	1.35	Ω	I _D = 0.5 A V _{GS} = 4 V *
Forward transfer admittance	y _{fs}	0.7	1.2	—	S	I _D = 0.5 A V _{DS} = 10 V *
Input capacitance	C _{iss}	—	130	—	pF	V _{DS} = 10 V
Output capacitance	C _{oss}	—	50	—	pF	V _{GS} = 0
Reverse transfer capacitance	C _{rss}	—	12	—	pF	f = 1 MHz
Turn-on delay time	t _{d(on)}	—	7	—	ns	I _D = 0.5 A
Rise time	t _r	—	6.5	—	ns	V _{GS} = 10 V
Turn-off delay time	t _{d(off)}	—	55	—	ns	R _L = 60 Ω
Fall time	t _f	—	20	—	ns	
Body-drain diode forward voltage	V _{DF}	—	0.85	—	V	I _F = 1.0 A, V _{GS} = 0
Body-drain diode reverse recovery time	t _{rr}	—	80	—	ns	I _F = 1.0 A, V _{GS} = 0, diF / dt = 50 A / µs

* Pulse Test

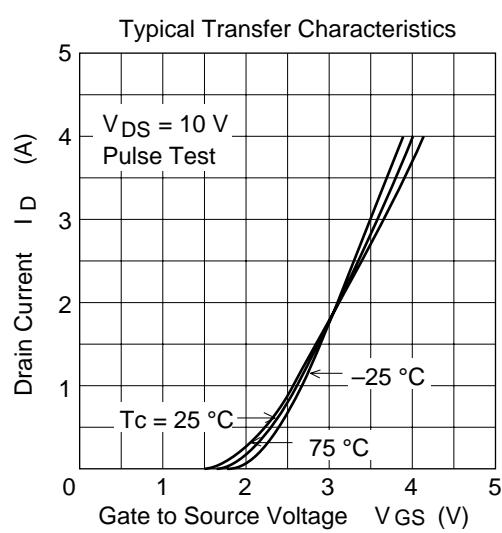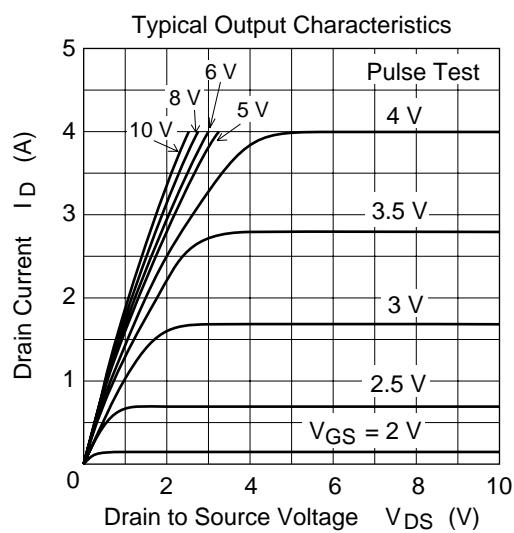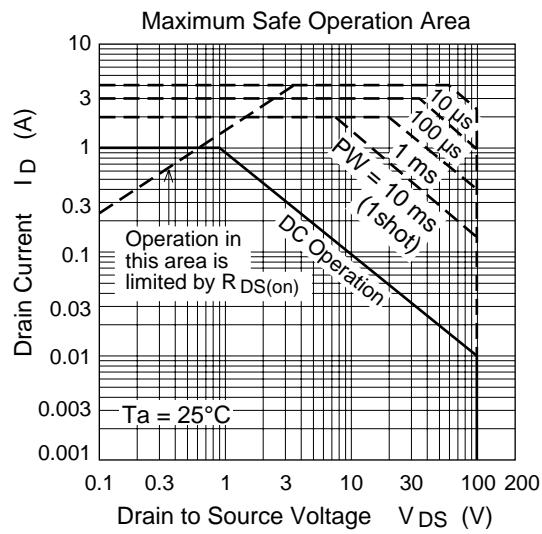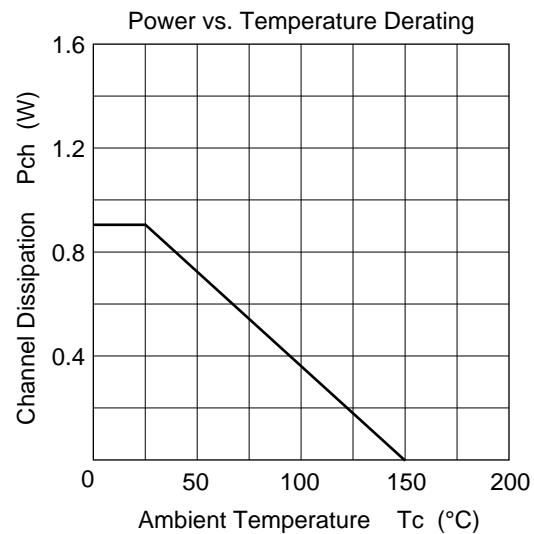

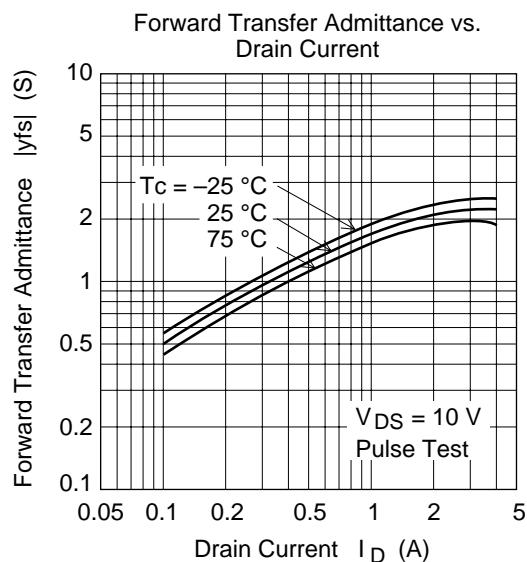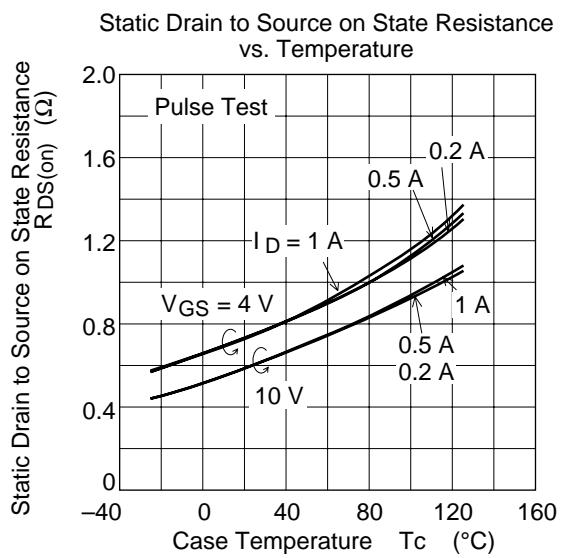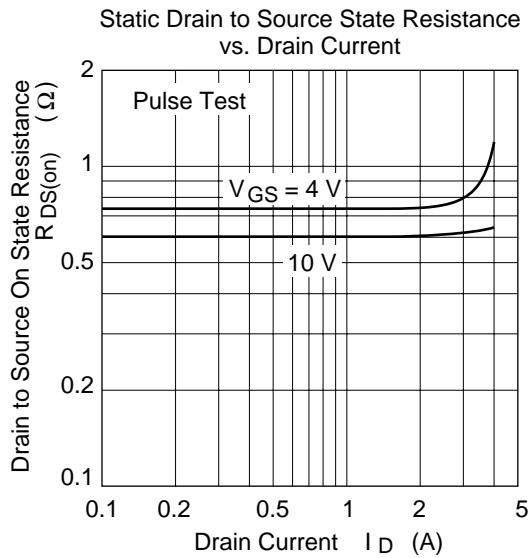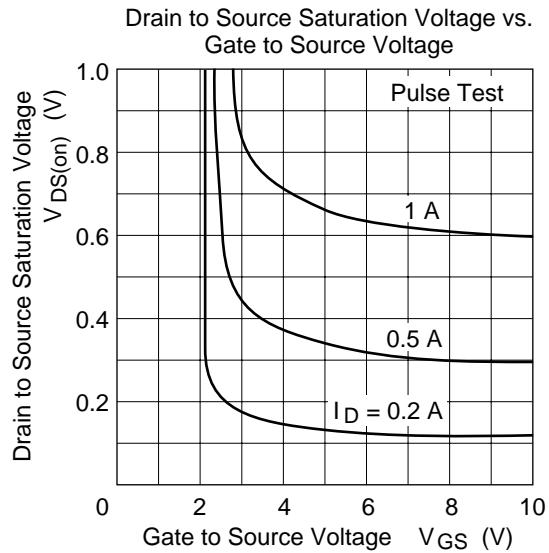

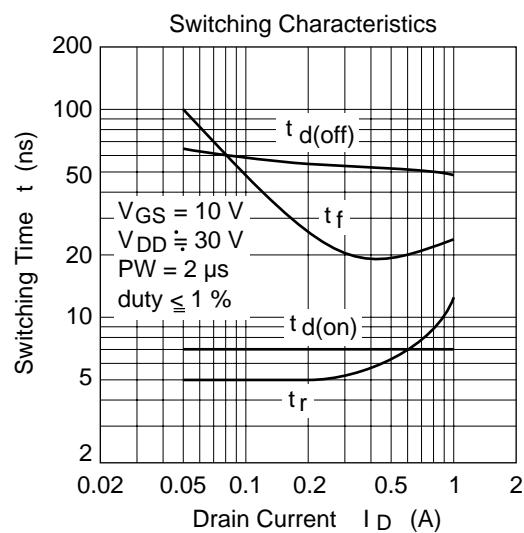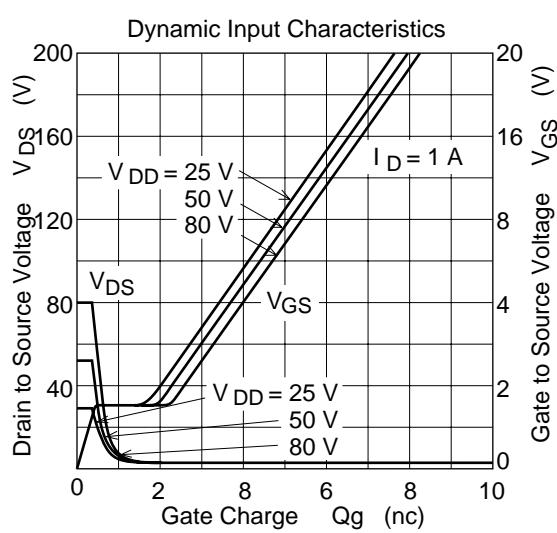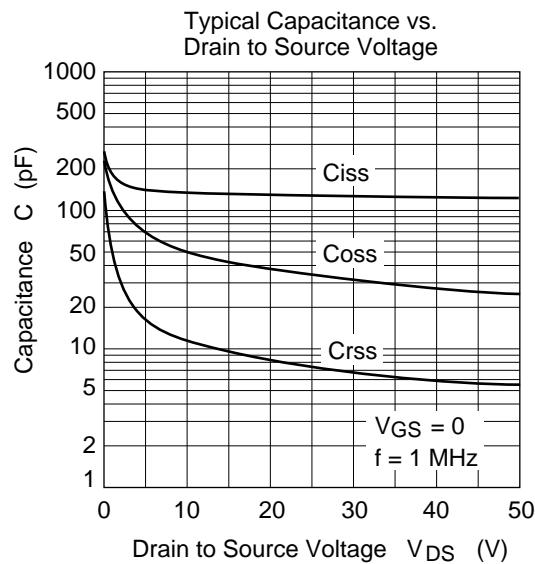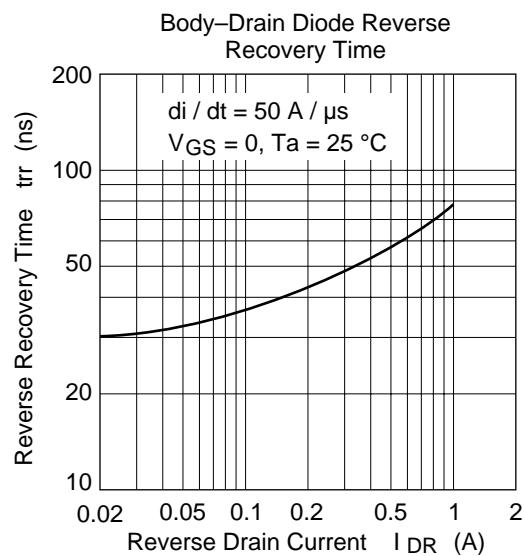

2SK2085

