

LMG7550XUFC

640*480 Dots

FEATURES

- ◆ Black on White Film STN Type
- ◆ Transmissive Mode
- ◆ High Brightness CFL Backlight
- ◆ High Contrast LC Material

MECHANICAL DATA

| Item | Value | Unit |
|-------------------|-------------|------|
| Module Dimensions | 274*183*9 | mm |
| Viewing Area | 215.2*162.4 | mm |
| Resolution | 640*480 | dots |
| Dot Size | 0.3*0.3 | mm |
| Dot Pitch | 0.33*0.33 | mm |
| Weight | 450 | g |

OPTICAL DATA

| Item | Symbol | Condition | Min | Typ | Max | Unit |
|----------------------|----------------|------------------------|------|-------|-----|-------------------|
| Contrast Ratio | K | ∅=10°, Q=0°, Note 1 | (10) | (18) | - | - |
| Brightness | - | T=25°C, IL=5mA, Note 7 | (80) | (100) | - | cd/m ² |
| Viewing Direction | - | - | - | 12 | - | o'clock |
| Viewing Angle | ∅2 - ∅1 | K=2, Note 1 | 30 | 40 | - | degree |
| Response Time (Rise) | t _R | ∅=10°, Q=0°, Note 1 | - | 160 | - | ms |
| Response Time (Fall) | t _F | ∅=10°, Q=0°, Note 1 | - | 110 | - | ms |

ABSOLUTE MAXIMUM RATINGS

| Item | Symbol | Condition | Min | Max | Unit |
|---------------------------|-----------------------------------|-----------|------|---------------------|------|
| Supply Voltage (Logic) | V _{DD} - V _{SS} | - | 0 | 6.5 | V |
| Supply Voltage (LC Drive) | V _{DD} - V _{EE} | - | 0 | 27.5 | V |
| Input Voltage | V _I | Note 2 | -0.3 | 0.3+V _{DD} | V |
| Operating Temperature | T _{OP} | Note 5,6 | 0 | 50 | °C |
| Storage Temperature | T _{ST} | Note 5,6 | -20 | 60 | °C |

DATA INTERFACE PIN ASSIGNMENT

| Pin No | Symbol | Level | Function |
|--------|--------------|-------|---------------------------|
| 1 | FRAME | H | First Line Marker |
| 2 | LOAD | H->L | Data latch |
| 3 | CP | H->L | Data shift |
| 4 | Not DISP OFF | H/L | High for ON / Low for OFF |
| 5 | VDD | - | Power supply for logic |
| 6 | VSS | - | GND |
| 7 | VEE | - | Power supply for LC |
| 8-11 | UD0 - UD3 | H/L | Display data (upper half) |
| 12-15 | LD0 - LD3 | H/L | Display data (lower half) |

CFL INTERFACE PIN ASSIGNMENT

| Pin No | Symbol | Level | Function |
|--------|--------|-------|----------------------|
| 1 | HV | - | Power supply for CFL |
| 2 | NC | - | No connection |
| 3 | NC | - | No connection |
| 4 | GND | - | CFL Ground |

- Note 1: Definition of optical data, see page 84
 Note 2: Applied to NotDISP.OFF, FRAME, LOAD, CP,LD0-LD3, UD0-UD3
 Note 3: fFRAME=140Hz, UD0-UD3=0.1.0.1...LD0-LD3=1.0.1.0...VDD-V0=22.7V,T=25°C
 Note 4: Recommended LCD driving may fluctuate about +/-1.0V by each module

ELECTRICAL CHARACTERISTICS

| Item | Symbol | Condition | Min | Typ | Max | Unit |
|------------------------------|-----------------------------------|----------------------------|---------------------|--------|---------------------|------|
| Supply Voltage (Logic) | V _{DD} - V _{SS} | - | 4.75 | 5.0 | 5.25 | V |
| Supply Voltage (LC Drive) | V _{EE} - V _{SS} | - | - | - | - | V |
| Supply Current | I _{DD} | Note 3 | - | (25.0) | (30.0) | mA |
| | I _{EE} | Note 3 | - | (19.0) | (30.0) | mA |
| Input Voltage (High Level) | V _{IH} | High Level, Note 2 | 0.7*V _{DD} | - | V _{DD} | V |
| Input Voltage (Low Level) | V _{IL} | Low Level, Note 2 | 0 | - | 0.3*V _{DD} | V |
| Frame Frequency | f _{FLM} | Note 8 | (69) | - | (110) | Hz |
| Duty Ratio | - | - | - | 1/244 | - | - |
| Recommended LC Drive Voltage | V _{DD} - V _O | Duty=1/244, T=0°C, Note 4 | - | (23.9) | - | V |
| | | Duty=1/244, T=25°C, Note 4 | - | (22.7) | - | V |
| | | Duty=1/244, T=40°C, Note 4 | - | (21.6) | - | V |
| Backlight Lamp Voltage | V _{BL} | T=25°C | - | (430) | - | Vrms |
| Backlight Lamp Frequency | f _{BL} | T=25°C | (50) | - | (70) | kHz |
| Backlight Lamp Current | I _{BL} | T=25°C | 4 | 4.5 | 6 | mA |
| Lamp Start Voltage | V _S | T=25°C, Note 9 | 1000 | - | - | V |

TIMING CHARACTERISTICS

| Item | Symbol | Min | Typ | Max | Unit |
|------------------------|--------------------|-----|-----|-----|------|
| Clock frequency | f _{CP} | - | - | 6.5 | MHz |
| Clock pulse width | t _W | 63 | - | - | ns |
| Rise, Fall time | tr, tf | - | - | 20 | ns |
| Data set up time | t _{DSU} | 50 | - | - | ns |
| Data hold time | t _{DHD} | 50 | - | - | ns |
| LOAD set up time | t _{LSU} | 80 | - | - | ns |
| LOAD->Clock time, 3.3V | t _{LC} | 120 | - | - | ns |
| LOAD->Clock time, 5.0V | t _{CL} | 80 | - | - | ns |
| FRAME set up time | t _{SETUP} | 100 | - | - | ns |
| FRAME hold time | t _{HOLD} | 100 | - | - | ns |
| LOAD pulse width | t _{WC} | 125 | - | - | ns |


INVERTER AND CONNECTORS

| Recommended Inverter | Starter Kit |
|----------------------|---------------------------------------------|
| HITACHI INVC304 | START7550 |
| Data Connector | Data Housing Connector |
| MOLEX 53261-1510 | 51021-1500 |
| Lamp Connector | Lamp Housing Connector |
| MITSUMI M63M83-04 | M61M73-04, M60-04-30-114P or M60-04-30-134P |


- Note 5: Background colour of the LCD changes depending on temperature. Between 40-50°C optical characteristics of the LCD like contrast and viewing angle change but the display remains readable.
 Note 6: Storage at -20°C < 48 hr, at 60°C < 168 hr
 Note 7: Measurement after 10 minutes of CFL operating. Brightness control at 100%
 Note 8: Need to make sure of flickering and rippling of display when setting the Frame Frequency in your set
 Note 9: Starting discharge voltage is increased when LCM is operating at lower temperature. Please check the characteristics of inverter before applying.




MECHANICAL DIMENSIONS

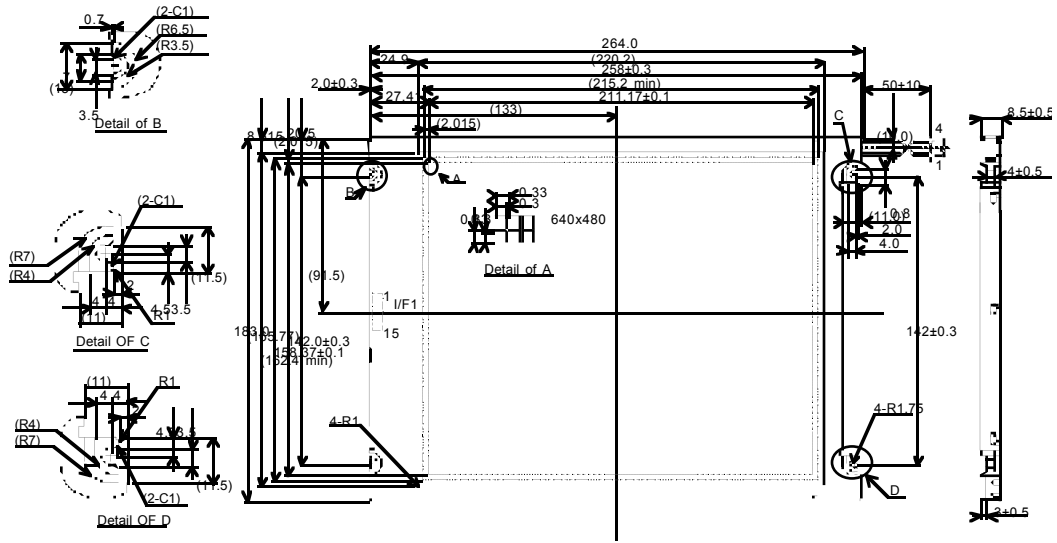

BLOCK DIAGRAM

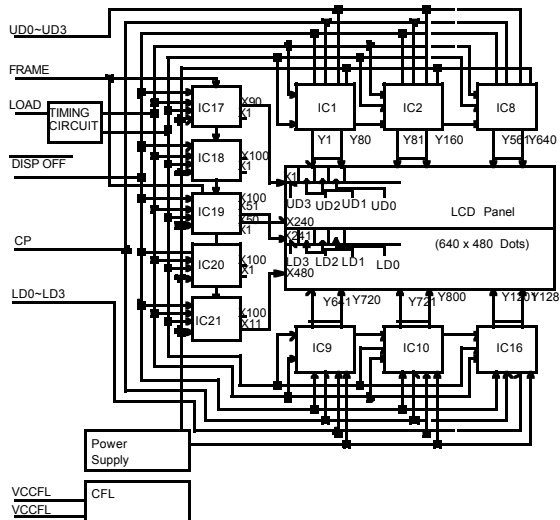

POWER SUPPLY / POWER UP TIMING DIAGRAM

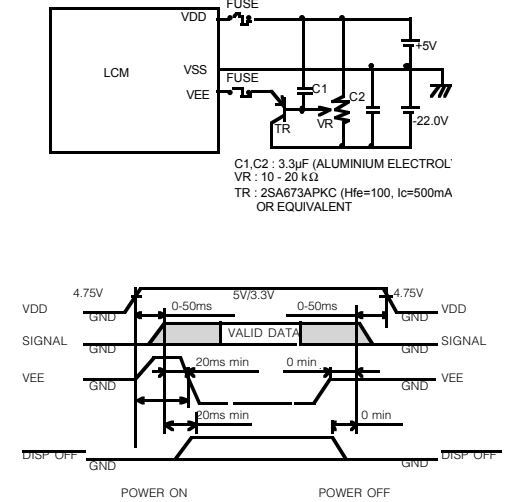

INTERFACE TIMING DIAGRAM

