



NATL SEMICOND (MEMORY) 加急出货

T-75-45-05

DS78C20/DS88C20

## DS78C20/DS88C20 Dual CMOS Compatible Differential Line Receiver

### General Description

The DS78C20 and DS88C20 are high performance, dual differential, CMOS compatible line receivers for both balanced and unbalanced digital data transmission. The inputs are compatible with EIA and Federal Standards.


Input specifications meet or exceed those of the popular DS7820/DS8820 line receiver, and the pinout is identical.

A response pin is provided for controlling sensitivity to input noise spikes with an external capacitor. Each receiver includes a 180Ω terminating resistor, which may be used optionally on twisted pair lines. The DS78C20 is specified over a -55°C to +125°C operating temperature range, and the DS88C20 over a 0°C to +70°C range.

### Features

- Meets requirements of EIA Standards RS-232-C RS-422 and RS-423, and Federal Standards 1020 and 1030
- Input voltage range of  $\pm 15V$  (differential or common-mode)
- Separate strobe input for each receiver
- $\frac{1}{2} V_{CC}$  strobe threshold for CMOS compatibility
- 5k typical input impedance
- 50 mV input hysteresis
- 200 mV input threshold
- Operation voltage range = 4.5V to 15V
- DS7830/DS8830 or MM78C30/MM88C30 recommended driver

### Connection Diagram

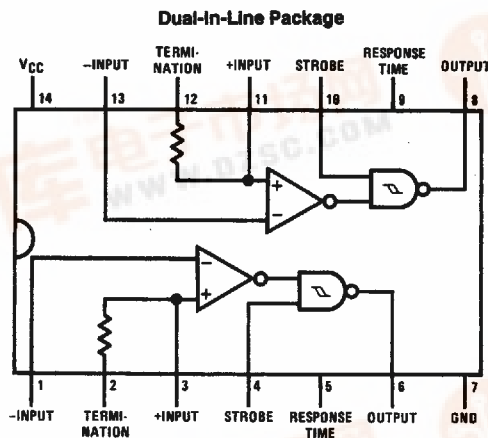

TL/F/5798-1

Order Number DS78C20J or DS88C20N  
See NS Package Numbers J14A or N14A

For Complete Military 883 Specifications,  
see RETS Data Sheet.

Order Number DS78C20J/883  
See NS Package Number J14A

**Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|                            |       |
|----------------------------|-------|
| Supply Voltage             | 18V   |
| Common-Mode Voltage        | ±25V  |
| Differential Input Voltage | ±25V  |
| Strobe Voltage             | 18V   |
| Output Sink Current        | 50 mA |

Maximum Power Dissipation\* at 25°C

|                |         |
|----------------|---------|
| Cavity Package | 1364 mW |
| Molded Package | 1280 mW |

Storage Temperature Range -65°C to +150°C

Lead Temperature (Soldering, 4 seconds) 260°C

\*Derate cavity package 9.1 mW/°C; derate molded package 10.2 mW/°C above 25°C.

**Operating Conditions**

|                                  | Min | Max  | Units |
|----------------------------------|-----|------|-------|
| Supply Voltage ( $V_{CC}$ )      | 4.5 | 15   | V     |
| Temperature ( $T_A$ )            |     |      |       |
| DS78C20                          | -55 | +125 | °C    |
| DS88C20                          | 0   | +70  | °C    |
| Common-Mode Voltage ( $V_{CM}$ ) | -15 | +15  | V     |

**Electrical Characteristics** (Notes 2 and 3)

## NATL SEMICOND (MEMORY)

| Symbol      | Parameter                         | Conditions                                                                          | Min                         | Typ             | Max  | Units      |
|-------------|-----------------------------------|-------------------------------------------------------------------------------------|-----------------------------|-----------------|------|------------|
| $V_{TH}$    | Differential Threshold Voltage    | $I_{OUT} = -200 \mu A$ ,<br>$V_{OUT} \geq V_{CC} - 1.2V$                            | $-10V \leq V_{CM} \leq 10V$ | 0.06            | 0.2  | V          |
|             |                                   |                                                                                     | $-15V \leq V_{CM} \leq 15V$ | 0.06            | 0.3  | V          |
|             |                                   | $I_{OUT} = 1.6 mA$ , $V_{OUT} \leq 0.5V$                                            | $-10V \leq V_{CM} \leq 10V$ | -0.08           | -0.2 | V          |
|             |                                   |                                                                                     | $-15V \leq V_{CM} \leq 15V$ | -0.08           | -0.3 | V          |
| $R_{IN}$    | Input Resistance                  | $-15V \leq V_{CM} \leq 15V$                                                         |                             | 5               |      | k $\Omega$ |
| $R_T$       | Line Termination Resistance       | $T_A = 25^\circ C$                                                                  | 100                         | 180             | 300  | $\Omega$   |
| $I_{IND}$   | Data Input Current (Unterminated) | $V_{CM} = 10V$                                                                      |                             | 2               | 3.1  | mA         |
|             |                                   | $V_{CM} = 0V$                                                                       |                             | 0               | -0.5 | mA         |
|             |                                   | $V_{CM} = -10V$                                                                     |                             | -2              | -3.1 | mA         |
| $V_{THB}$   | Input Balance                     | $I_{OUT} = 200 \mu A$ , $V_{OUT} \geq V_{CC} - 1.2V$ , $R_S = 500\Omega$ , (Note 5) | $-7V \leq V_{CM} \leq 7V$   | 0.1             | 0.4  | V          |
|             |                                   | $I_{OUT} = 1.6 mA$ , $V_{OUT} \leq 0.5V$ , $R_S = 500\Omega$ , (Note 5)             | $-7V \leq V_{CM} \leq 7V$   | -0.1            | -0.4 | V          |
| $V_{OH}$    | Logical "1" Output Voltage        | $I_{OUT} = -200 \mu A$ , $V_{DIFF} = 1V$                                            | $V_{CC} - 1.2$              | $V_{CC} - 0.75$ |      | V          |
| $V_{OL}$    | Logical "0" Output Voltage        | $I_{OUT} = 1.6 mA$ , $V_{DIFF} = -1V$                                               |                             | 0.25            | 0.5  | V          |
| $I_{CC}$    | Power Supply Current              | $15V \leq V_{CM} \leq -15V$ ,<br>$V_{DIFF} = -0.5V$<br>(Both Receivers)             | $V_{CC} = 5.5V$             | 8               | 15   | mA         |
|             |                                   |                                                                                     | $V_{CC} = 15V$              | 15              | 30   | mA         |
| $I_{IN(1)}$ | Logical "1" Strobe Input Current  | $V_{STROBE} = 15V$ , $V_{DIFF} = 3V$                                                | $V_{CC} = 15V$              | 15              | 100  | $\mu A$    |
| $I_{IN(0)}$ | Logical "0" Strobe Input Current  | $V_{STROBE} = 0V$ , $V_{DIFF} = -3V$                                                | $V_{CC} = 15V$              | -0.5            | -100 | $\mu A$    |
| $V_{IH}$    | Logical "1" Strobe Input Voltage  | $I_{OUT} = 1.6 mA$ , $V_{OL} \leq 0.5V$                                             | $V_{CC} = 5V$               | 3.5             | 2.5  | V          |
|             |                                   |                                                                                     | $V_{CC} = 10V$              | 8.0             | 5.0  | V          |
|             |                                   |                                                                                     | $V_{CC} = 15V$              | 12.5            | 7.5  | V          |
| $V_{IL}$    | Logical "0" Strobe Input Voltage  | $I_{OUT} = -200 \mu A$ ,<br>$V_{OH} = V_{CC} - 1.2V$                                | $V_{CC} = 5V$               | 2.5             | 1.5  | V          |
|             |                                   |                                                                                     | $V_{CC} = 10V$              | 5.0             | 2.0  | V          |
|             |                                   |                                                                                     | $V_{CC} = 15V$              | 7.5             | 2.5  | V          |
| $I_{OS}$    | Output Short-Circuit Current      | $V_{OUT} = 0V$ , $V_{CC} = 15V$ , $V_{STROBE} = 0V$ , (Note 4)                      | -5                          | -20             | -40  | mA         |

**Switching Characteristics**  $V_{CC} = 5V$ ,  $T_A = 25^\circ C$ 

| Symbol       | Parameter                        | Conditions            | Min | Typ | Max | Units |
|--------------|----------------------------------|-----------------------|-----|-----|-----|-------|
| $t_{pd(D)}$  | Differential Input to "0" Output | $C_L = 50 \text{ pF}$ |     | 60  | 100 | ns    |
| $t_{pd1(D)}$ | Differential Input to "1" Output | $C_L = 50 \text{ pF}$ |     | 100 | 150 | ns    |
| $t_{pd0(S)}$ | Strobe Input to "0" Output       | $C_L = 50 \text{ pF}$ |     | 30  | 70  | ns    |
| $t_{pd1(S)}$ | Strobe Input to "1" Output       | $C_L = 50 \text{ pF}$ |     | 100 | 150 | ns    |


**Note 1:** "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

**Note 2:** Unless otherwise specified min/max limits apply across the  $-55^\circ C$  to  $+125^\circ C$  temperature range for the DS78C20 and across the  $0^\circ C$  to  $+70^\circ C$  range for the DS88C20. All typical values are for  $T_A = 25^\circ C$ ,  $V_{CC} = 5V$  and  $V_{CM} = 0V$ .

**Note 3:** All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.

**Note 4:** Only one output at a time should be shorted.

**Note 5:** Refer to EIA-RS-422 for exact conditions.

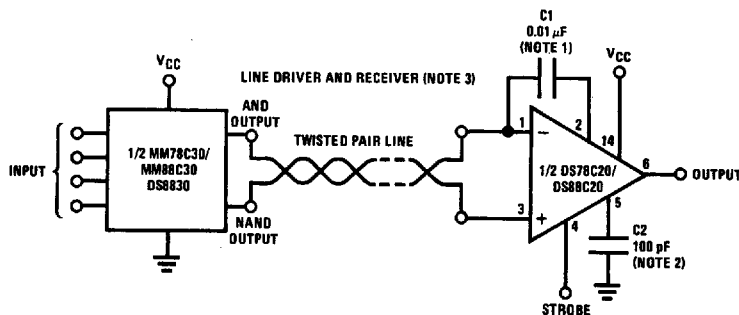**Typical Applications****RS-422/RS-423 Application**

TL/F/5798-2

**Note 1:** (Optional internal termination resistor.)

a) Capacitor in series with internal line termination resistor, terminates the line and saves termination power. Exact value depends on line length.


b) Pin 1 connected to pin 2; terminates the line.

c) Pin 2 open; no internal line termination.

d) Transmission line may be terminated elsewhere or not at all.

**Note 2:** Optional to control response time.


**Note 3:**  $V_{CC}$  4.5V to 15V for the DS78C20. For further information on line drivers and line receivers, refer to application notes AN-22, AN-83 and AN-108.

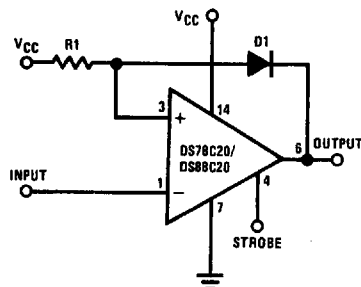**RS-232-C Application with Hysteresis**

TL/F/5798-3

For signals which require fail-safe or have slow rise and fall times, use R1 and D1 as shown above. Otherwise, the positive input (pin 3 or 11) may be connected to ground.

| $V_{CC}$ | $R1 \pm 5\%$   |
|----------|----------------|
| 5V       | 4.3 k $\Omega$ |
| 10V      | 15 k $\Omega$  |
| 15V      | 24 k $\Omega$  |




TL/F/5798-4


57E D ■ 6501126 0066430 415 ■ NSC3

## AC Test Circuit

NATL SEMICON (MEMORY)

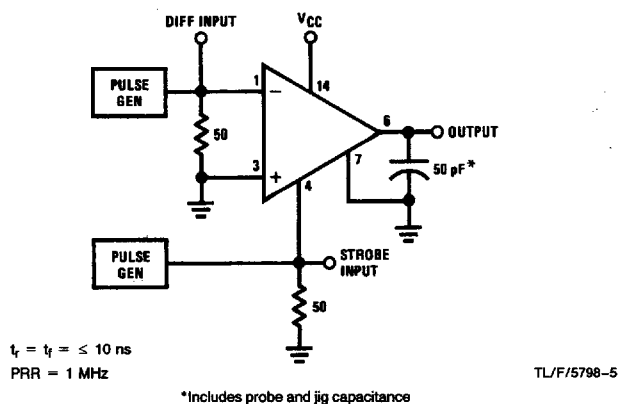

## Switching Time Waveforms

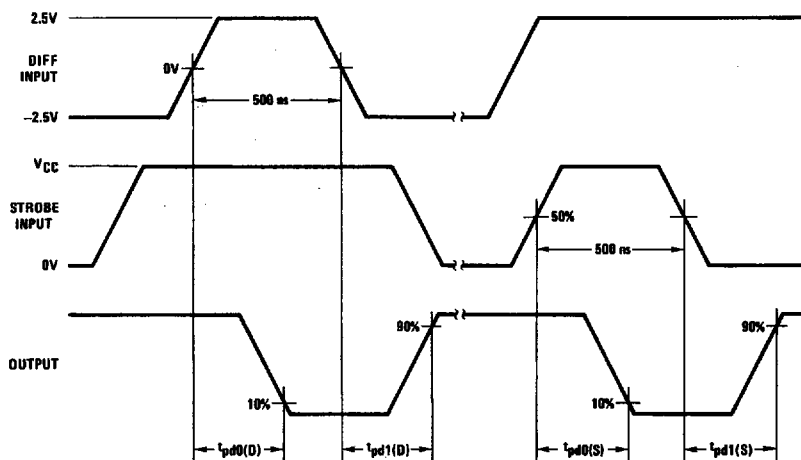

TL/F/5798-6