

SANYO	No.1781A	2SD1628
		NPN Epitaxial Planar Silicon Transistor

High-Current Switching Applications

Applications

- Strobe DC-DC converters, relay drivers, hammer drivers, lamp drivers, motor drivers.

Features

- Low saturation voltage.
- High h_{FE} .
- Large current capacity.
- Very small size making it easy to provide high-density, small-sized hybrid IC's.

Absolute Maximum Ratings at $T_a=25^{\circ}C$

		unit
Collector to Base Voltage	V_{CBO}	60 V
Collector to Emitter Voltage	V_{CEO}	20 V
Emitter to Base Voltage	V_{EBO}	6 V
Collector Current	I_C	5 A
Collector Current(Pulse)	I_{CP}	8 A
Collector Dissipation	P_C	500 mW
	$P_C(\text{Note})$	1.5 W
Junction Temperature	T_j	150 $^{\circ}C$
Storage Temperature	T_{stg}	-55 to +150 $^{\circ}C$

(Note) Mounted on ceramic board (250mm² x 0.8mm)

Electrical Characteristics at $T_a=25^{\circ}C$


		min	typ	max	unit
Collector Cutoff Current	I_{CBO} $V_{CB}=50V, I_E=0$			100	nA
Emitter Cutoff Current	I_{EBO} $V_{EB}=5V, I_C=0$			100	nA
DC Current Gain	$h_{FE}(1)$ $V_{CE}=2V, I_C=0.5A$	120*		560*	
	$h_{FE}(2)$ $V_{CE}=2V, I_C=3A$	95			
Gain-Bandwidth Product	f_T $V_{CE}=10V, I_C=50mA$		120		MHz
Output Capacitance	c_{ob} $V_{CB}=10V, f=1MHz$		45		pF
C-E Saturation Voltage	$V_{CE(sat)}$ $I_C=3A, I_B=60mA$			500	mV
B-E Saturation Voltage	$V_{BE(sat)}$ $I_C=3A, I_B=60mA$			1.5	V
Turn-ON Time	t_{on} See specified Test Circuit.		30		ns
Storage Time	t_{stg} "		300		ns
Fall Time	t_f "		40		ns

* The 2SD1628 is classified by 0.5A h_{FE} as follows:

120 E 200	160 F 320	280 G 560
-----------	-----------	-----------


Marking :DK

Switching Time Test Circuit

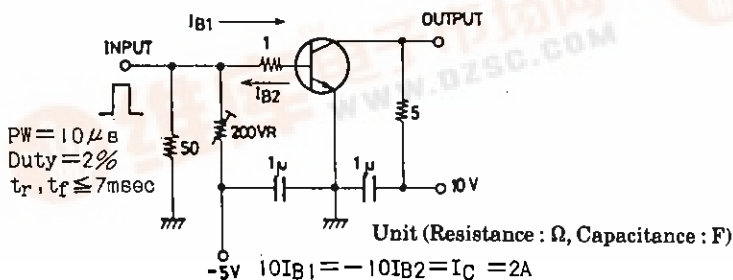









Package Dimensions 2038


(unit:mm)

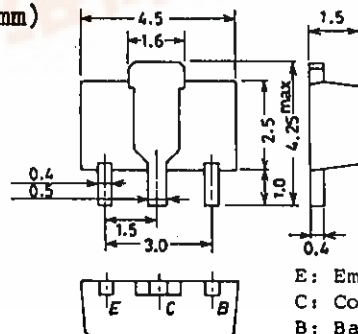

(Bottom View)

SANYO: PCP

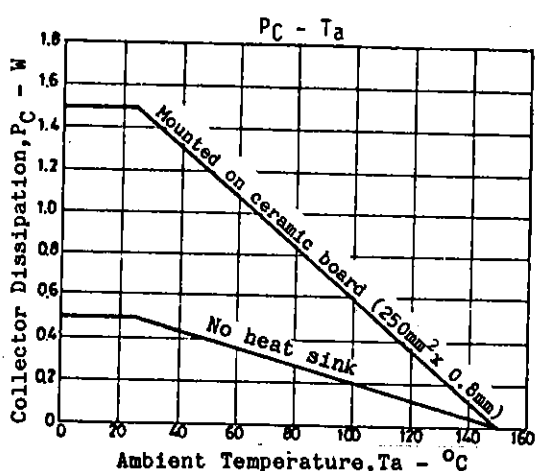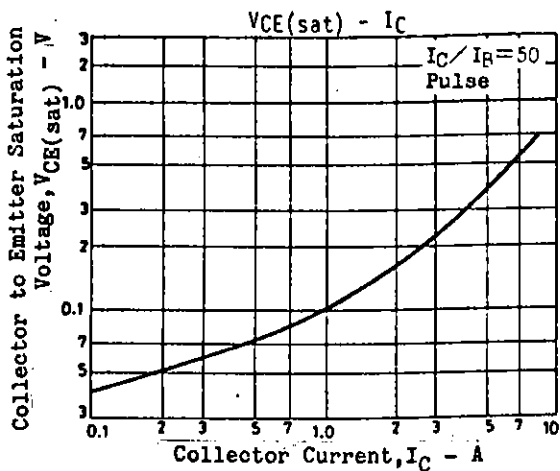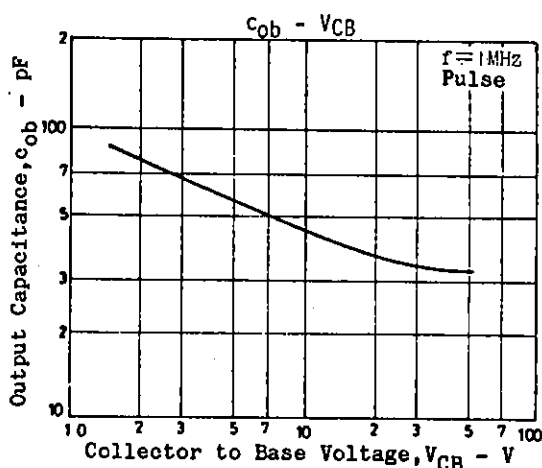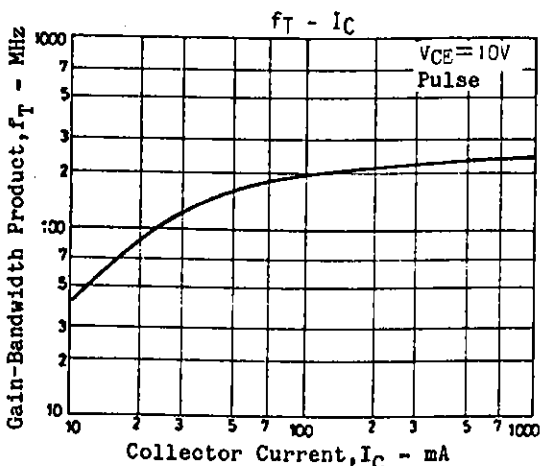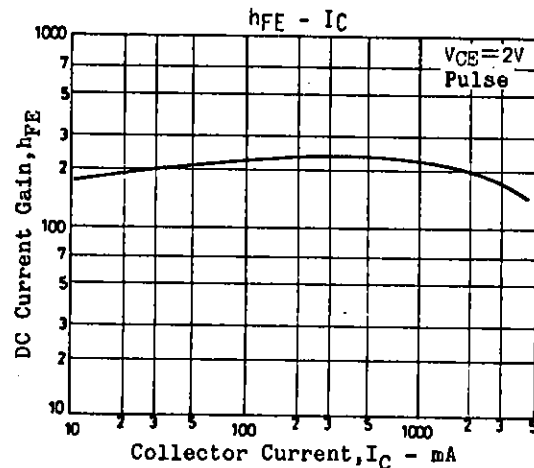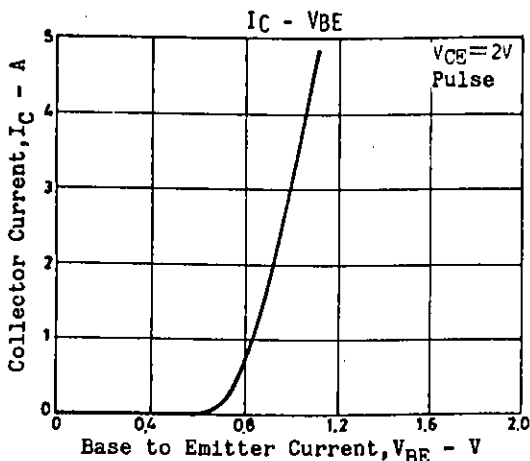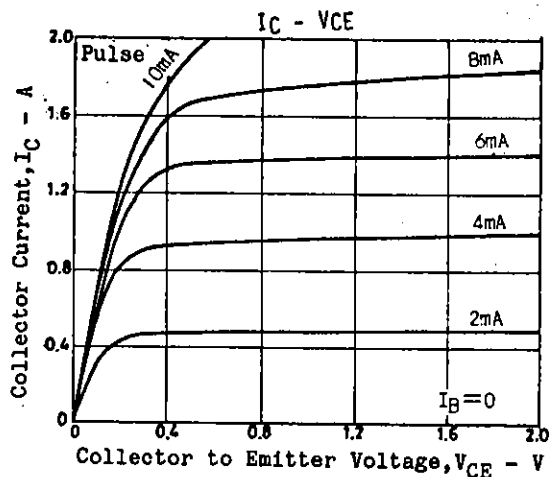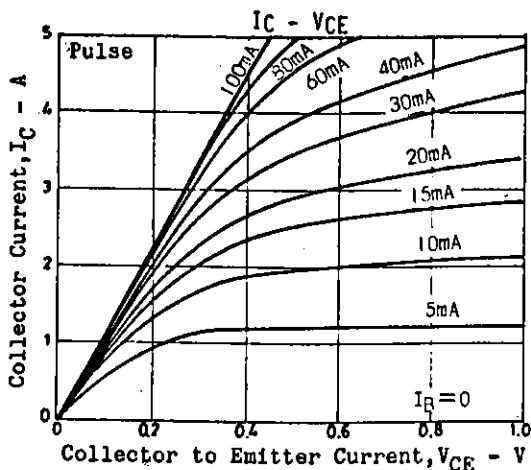

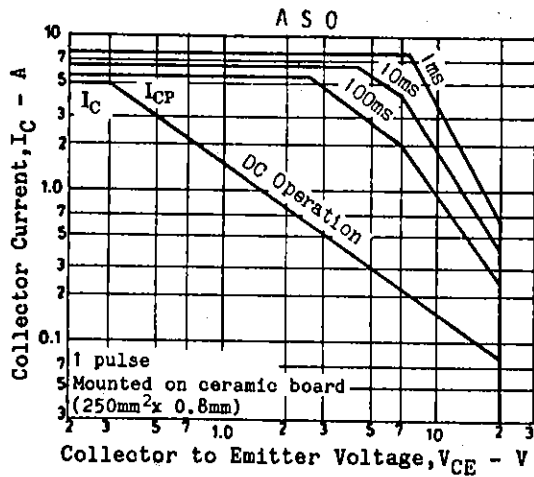

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.