

□ MN15G0202 , MN15G0402

Type	MN15G0202	MN15G0402
ROM (x8-bit)	2 K	4 K
RAM (x4-bit)	128	128
Package (Old Package)	SOP020-P-0300D *Pb free (SOP020-P-0300)	
Number of Instructions	103	
Minimum Instruction Execution Time	0.5 μs at 1/4 frequency dividing (at 3.0 V to 5.5 V, 8 MHz) 1.0 μs at 1/4 frequency dividing (at 2.4 V to 5.5 V, 4 MHz) 2.0 μs at 1/8 frequency dividing (at 2.0 V to 5.5 V, 4 MHz)* * The lower limit for operation guarantee for EPROM built-in type is 2.3 V.	
Interrupts	• RESET • IRQ1 • IRQ2 • IRQ3	
Timer Counter	Timer counter 2 : 8-bit × 1 (pulse output, PWM output) Clock source 1/2, 1/8, 1/32, 1/128 of system clock; 1/1, 1/4, 1/16, 1/64 of OSC oscillation clock Timer counter 3 : 8-bit × 1 (pulse output, high-functional PWM output) Clock source 1/2 of system clock; 1/1, 1/2 ⁶ , 1/2 ¹⁴ of OSC oscillation clock Timer counter 2 can be cascade-connected. Watchdog timer	
I/O Pins	I/O	15 • Common use : 11 • Specified pull-up resistor available : 7 (software programmable) • Specified output architecture available : Nch open drain / push-pull : 11 (software programmable) • 4-ch. LED direct drive available (15 mA / 1.0 V)
A/D Inputs	10-bit × 4-ch. (with S/H)	
Zero-Cross Input	1	
Special Ports	Buzzer output (1 kHz, 2 kHz, 4 kHz : fosc = at 4 MHz)	
Notes	Auto-Reset circuit selectable (none, circuit 1, circuit 2) (mask option)	

Electrical Characteristics


Supply current

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating supply current	IDD1	fosc = 8 MHz (1/8 dividing)		1.5	3.0	mA
	IDD2	fosc = 4 MHz (1/8 dividing)		1.2	2.5	mA
Supply current at HALT	IDD3	fosc = 4 MHz (1/8 dividing)		0.3	0.6	mA
Supply current at SOTP	IDD4	ACZ = 1/2 VDD, Ta = 25°C		3.0	10.0	μA
	IDD5	ACZ = 1/2 VDD, Ta = -40°C to +85°C			20.0	μA
	IDD6	Ta = 25°C			1.0	μA
	IDD7	Ta = -40°C to +85°C			5.0	μA
Auto reset current consumption	IDD8			4.0	8.0	μA

(Ta = -40°C to +85°C, VDD = 5.0 V, VSS = 0 V)

Pin Assignment

() : Old Package

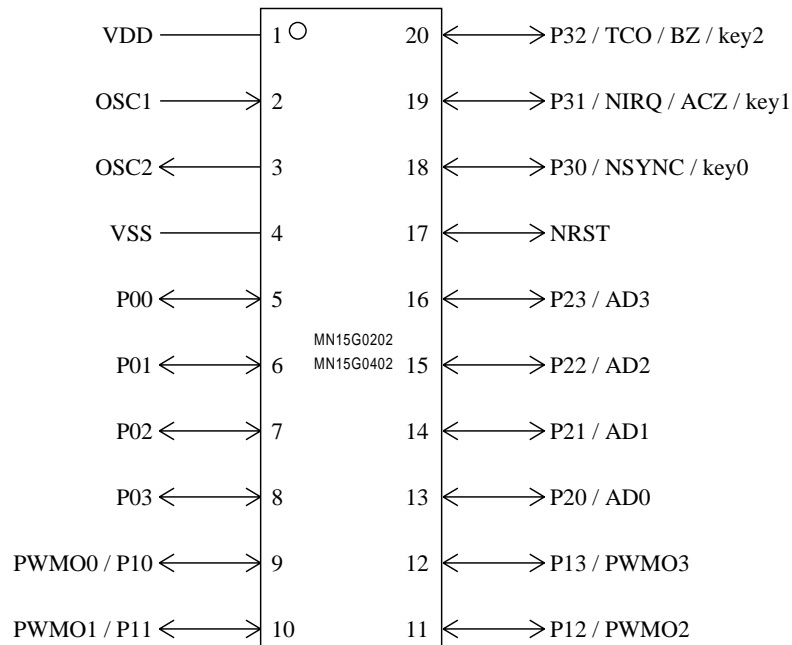

SOP020-P-0300D *Pb free
(SOP020-P-0300)

Support Tool

In-circuit Emulator	PX-ICE1500 + PX-PRB15G0202 / 0402-SOP020-P-0300	
EPROM Built-in Type	Type	MN15GP0402 [ES (Engineering Sample) available]
Note) • Because of a special writing system, only a particular writer model manufactured by Data I/O is applicable. • The mask option applies only to no auto reset circuit. (No other options are set.)	ROM (× 8-bit)	4 K
	RAM (× 4-bit)	128
	Minimum instruction execution time	0.5 μs at 1/4 frequency dividing (at 3.0 V to 5.5 V, 8 MHz)
		1.0 μs at 1/4 frequency dividing (at 2.4 V to 5.5 V, 4 MHz)
2.0 μs at 1/8 frequency dividing (at 2.3 V to 5.5 V, 4 MHz)		
Package	SOP020-P-0300D *Pb free	
(Old Package)	(SOP020-P-0300)	

Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuit examples of the products. It does not constitute the warranting of industrial property, the granting of relative rights, or the granting of any license.
- (3) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this material are subject to change without notice for reasons of modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, redundant design is recommended, so that such equipment may not violate relevant laws or regulations because of the function of our products.
- (6) When using products for which dry packing is required, observe the conditions (including shelf life and after-unpacking standby time) agreed upon when specification sheets are individually exchanged.
- (7) No part of this material may be reprinted or reproduced by any means without written permission from our company.

Please read the following notes before using the datasheets

- A. These materials are intended as a reference to assist customers with the selection of Panasonic semiconductor products best suited to their applications.
Due to modification or other reasons, any information contained in this material, such as available product types, technical data, and so on, is subject to change without notice.
Customers are advised to contact our semiconductor sales office and obtain the latest information before starting precise technical research and/or purchasing activities.
- B. Panasonic is endeavoring to continually improve the quality and reliability of these materials but there is always the possibility that further rectifications will be required in the future. Therefore, Panasonic will not assume any liability for any damages arising from any errors etc. that may appear in this material.
- C. These materials are solely intended for a customer's individual use.
Therefore, without the prior written approval of Panasonic, any other use such as reproducing, selling, or distributing this material to a third party, via the Internet or in any other way, is prohibited.