


PD-20713 07/99

International
IOR Rectifier

30BF.. Series

SURFACE MOUNTABLE
ULTRAFAST RECOVERY DIODE




SMC (DO-214AB)

Major Ratings and Characteristics

Characteristics	30BF..			Units
	10 to 20	40	60 to 80	
$I_{F(AV)}$	3			A
V_{RRM}	100 to 800			V
I_{FSM}	100			A
$V_F @ 3A, T_J=25^{\circ}C$	1.0	1.4	1.7	V
$t_{rr} @ T_J=25^{\circ}C$	50	50	100	ns
T_J range	-50 to 150			$^{\circ}C$

Features

- For surface mounted applications
- Low profile package
- Built in stress releaf
- Compatible with all pick & palce equipments
- Ultrafast recovery times for high efficiency
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- Glass passivated junction
- High temperature soldering: 260 $^{\circ}C$ \10 seconds at terminals

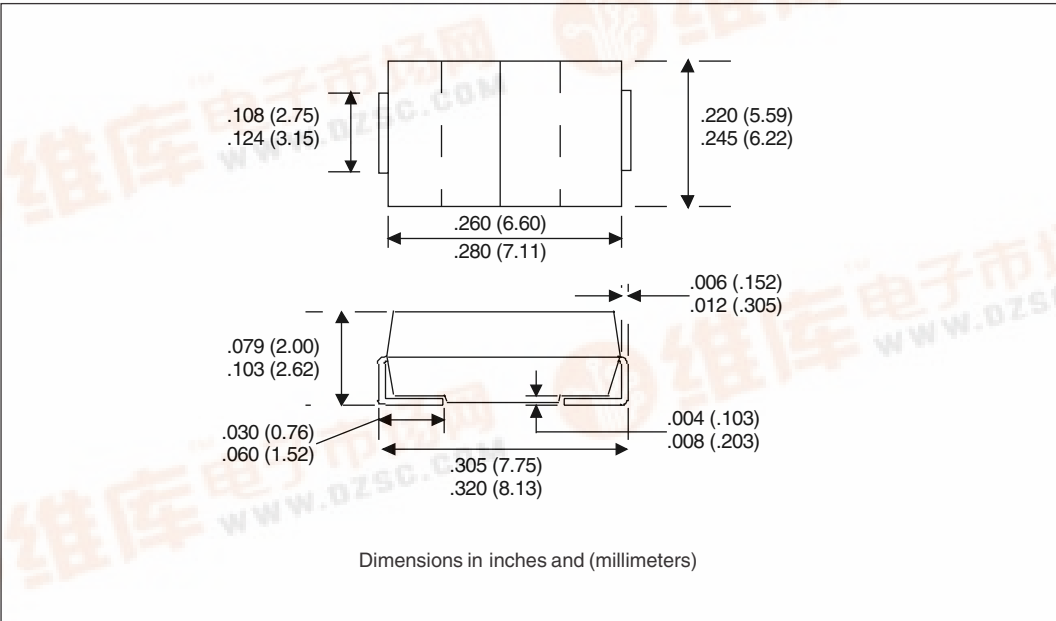

30BF.. Series

PD-20713 07/99

International
IOR Rectifier

Voltage Ratings

Part Number	V_{RRM} , maximum peak reverse voltage V	V_{DC} , maximum blocking voltage V	I_{RRM} 100°C μA
30BF10	100	100	500
30BF20	200	200	
30BF40	400	400	
30BF60	600	600	
30BF80	800	800	

Maximum Ratings and Electrical Characteristics

Parameters		30BF..			Units	Conditions
		10 to 20	40	60 to 80		
$I_{F(AV)}$	Maximum Average Forward Current	3			A	@ $T_L = 75^{\circ}\text{C}$
I_{FSM}	Peak Forward Surge Current	100			A	8.3ms single half sine wavesuperimposed on rated load (JEDEC Method) $T_A = 55^{\circ}\text{C}$
V_{FM}	Max. Instantaneous Forward Voltage	1.0	1.4	1.7	V	@ 3A
I_{RM}	Maximum DC Reverse Current	10			μA	$T_A = 25^{\circ}\text{C}$
	at Rated DC Blocking Voltage	500				$T_A = 100^{\circ}\text{C}$
t_{rr}	Reverse Recovery Time	50	50	100	ns	$I_F = 0.5\text{A}, I_R = 1.0\text{A}, I_{rr} = 0.25\text{A}$
C_J	Typical Junction Capacitance	75	75	50	pf	@ 1.0MHz applied reverse voltage of 4.0V

Ratings at 25°C ambient temperature unless otherwise specified.

Resistive or inductive load.

For capacitive load, derate current by 20%.

Mechanical Specifications

Parameters	30BF..	Units	Conditions
R_{thJ} Maximum Thermal Resistance	15	°C/W	8.0mm ² (.013mm thick) land areas
T_J Operating Temperature Range	-50 to 150	°C	
T_{stg} Storage Temperature Range	-50 to 150	°C	
wt Approximate Weight	0.21 (0.007)	g(oz)	
Case Style	DO-214AB		JEDEC molded plastic

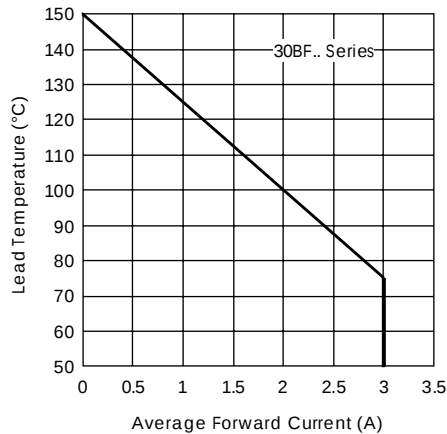


Fig. 1 - Maximum Average Forward Current Rating

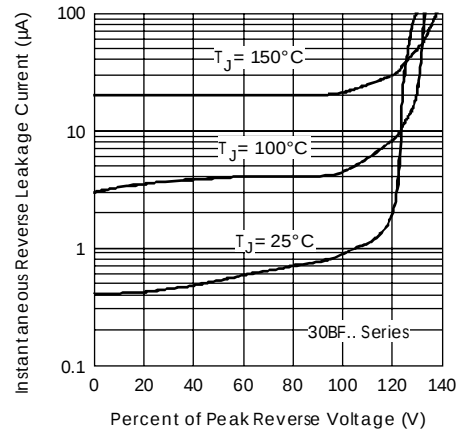


Fig. 2 - Typical Reverse Characteristics

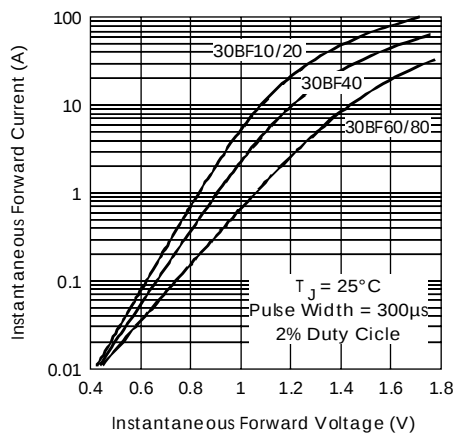


Fig. 3 - Typical Forward Characteristics

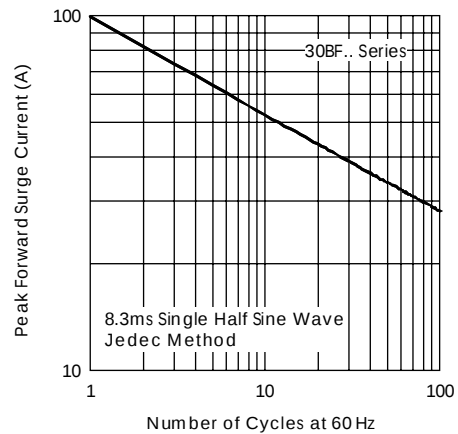


Fig. 4 - Max. Non-Repetitive Forward Surge Characteristic


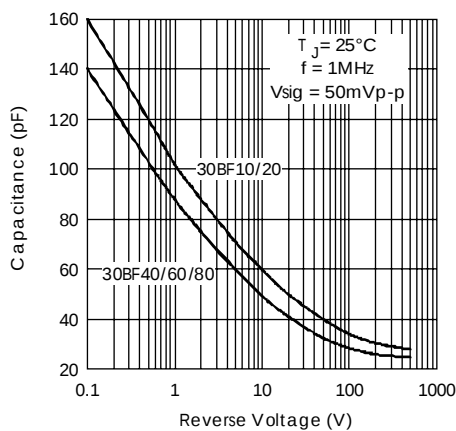


Fig. 5 - Typical Junction Capacitance

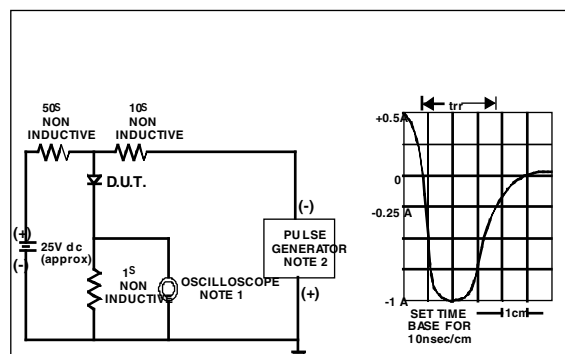


Reverse Recovery Time Characteristic
and Test Circuit Diagram

30BF.. Series


PD-20713 07/99

Ordering Information Table



- 1** - Current Rating x 10: 30 = 3A
- 2** - B = DO-214AB (SMC) Surface Mount
- 3** - F = Ultrafast Recovery
- 4** - Voltage code: Code = $V_{RRM} / 10$

Tape & Reel Information

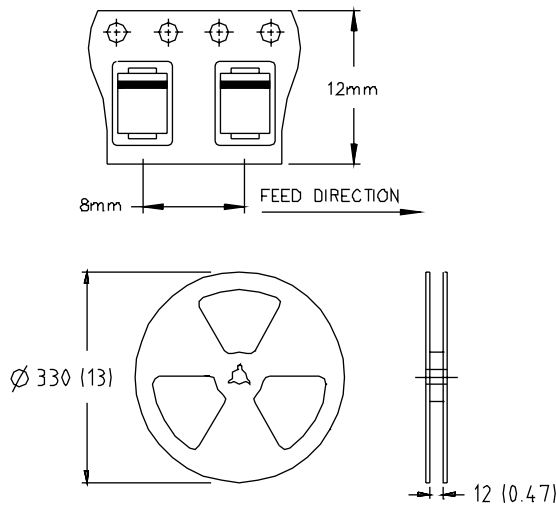

NOTE:
1. OUTLINE CONFORMS TO EIA-481.

Dimensions in millimeters and (inches)