

Preliminary Data Sheet I2124 rev. A 05/98

International IOR Rectifier

QUIETIR Series 8EWF..S

SURFACE MOUNTABLE
FAST SOFT RECOVERY
DIODE



$V_F < 1.2V @ 8A$
 $t_{rr} = 55ns$
 $V_{RRM} 200 \text{ to } 600V$

Description/Features

The 8EWF..S fast soft recovery **QUIETIR** rectifier series has been optimized for combined short reverse recovery time, low forward voltage drop and low leakage current. The glass passivation ensures stable reliable operation in the most severe temperature and power cycling conditions.


Typical applications are both:

- Output rectification and freewheeling diode in inverters, choppers and converters.
- Input rectifications where severe restrictions on conducted EMI should be met.

Major Ratings and Characteristics

Characteristics	8EWF..S	Units
$I_{F(AV)}$ Sinusoidal waveform	8	A
V_{RRM}	200 to 600	V
I_{FSM}	170	A
$V_F @ 8A, T_J = 25^\circ C$	1.2	V
$t_{rr} @ 1A, 100A/\mu s$	55	ns
T_J	-40 to 150	°C

Package Outline

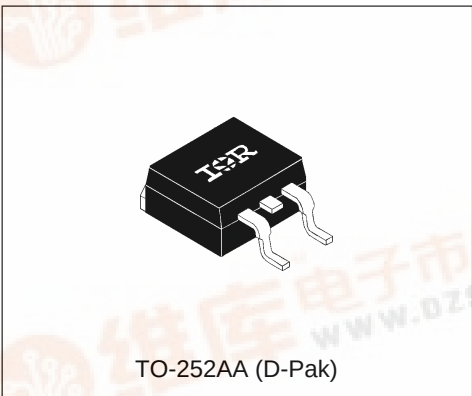

TO-252AA (D-Pak)



Voltage Ratings

Part Number	V_{RRM} , maximum peak reverse voltage V	V_{RSM} , maximum non repetitive peak reverse voltage V	I_{RRM} 150°C mA
8EWF02S	200	300	3
8EWS04S	400	500	
8EWF06S	600	700	

Absolute Maximum Ratings

Parameters	8EWF..S	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	8	A	@ $T_C = 96^\circ\text{C}$, 180° conduction half sine wave
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current	170	A	10ms Sine pulse, rated V_{RRM} applied
	200		10ms Sine pulse, no voltage reappplied
I^2t Max. I^2t for fusing	140	A^2s	10ms Sine pulse, rated V_{RRM} applied
	200		10ms Sine pulse, no voltage reappplied
$I^2\sqrt{t}$ Max. $I^2\sqrt{t}$ for fusing	2000	$A^2\sqrt{s}$	$t = 0.1$ to 10ms, no voltage reappplied


Electrical Specifications

Parameters	8EWF..S	Units	Conditions
V_{FM} Max. Forward Voltage Drop	1.2	V	@ 8A, $T_J = 25^\circ\text{C}$
r_t Forward slope resistance	16	$m\Omega$	$T_J = 150^\circ\text{C}$
$V_{F(TO)}$ Threshold voltage	1.13	V	
I_{RM} Max. Reverse Leakage Current	0.1	mA	$T_J = 25^\circ\text{C}$
	3		$T_J = 150^\circ\text{C}$

$V_R = \text{rated } V_{RRM}$

Typical Reverse Recovery Characteristics

Parameters	8EWF..S	Units	Conditions
t_{rr} Reverse Recovery Time	140	ns	$I_F @ 8A_{pk}$ @ 25A/ μs @ $T_J = 25^\circ\text{C}$
I_{rr} Reverse Recovery Current	2.6	A	
Q_{rr} Reverse Recovery Charge	0.25	μC	
S Snap Factor t_b/t_a	0.5	-	



Thermal-Mechanical Specifications

Parameters	8EWF..S	Units	Conditions
T_J Max. Junction Temperature Range	-40 to 150	°C	
T_{stg} Max. Storage Temperature Range	-40 to 150	°C	
Soldering Temperature	240	°C	for 10 seconds
R_{thJC} Max. Thermal Resistance Junction to Case	2.5	°C/W	DC operation
R_{thJA} Typ. Thermal Resistance Junction to Ambient (PCB Mount)**	50	°C/W	
wt Approximate Weight	1(0.03)	g(oz.)	
T Case Style	TO-252AA(D-Pak)		

**When mounted on 1" square (650mm²) PCB of FR-4 or G-10 material 4 oz (140μm) copper 40°C/W
For recommended footprint and soldering techniques refer to application note #AN-994

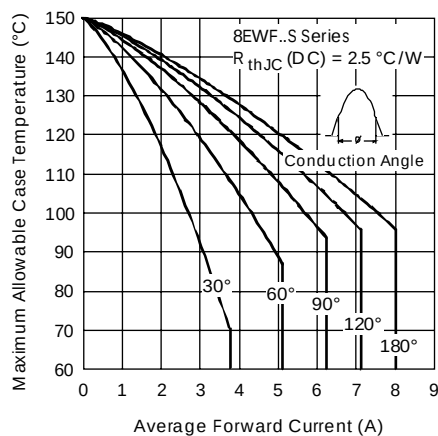


Fig.1-Current Rating Characteristics

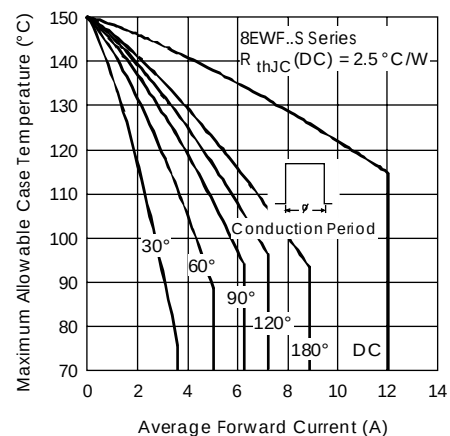


Fig.2-Current Rating Characteristics

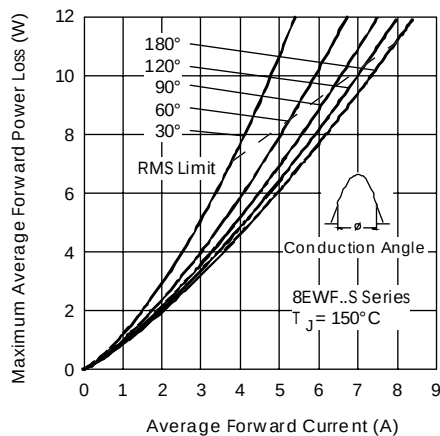


Fig.3-Forward Power Loss Characteristics

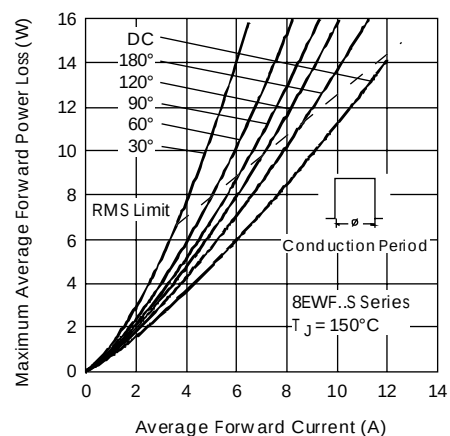


Fig.4-Forward Power Loss Characteristics

8EWF..S *QUIETIR* Series

Preliminary Data Sheet I2124 rev. A 05/98

International
IOR Rectifier

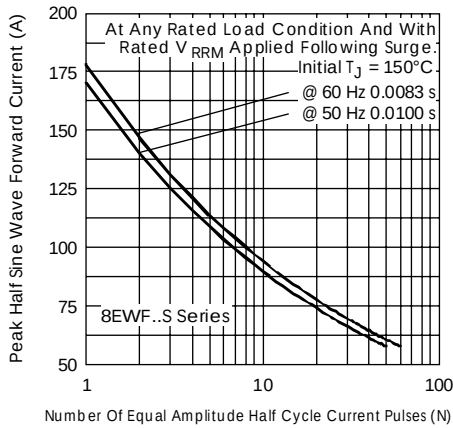


Fig. 5- Maximum Non-Repetitive Surge Current

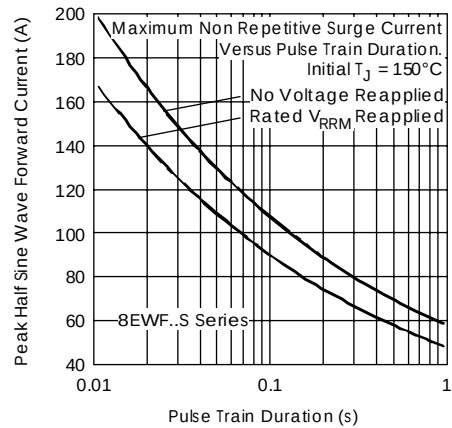


Fig. 6- Maximum Non-Repetitive Surge Current

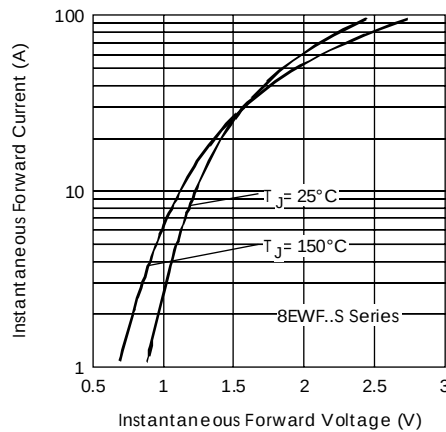


Fig. 7- Forward Voltage Drop Characteristics

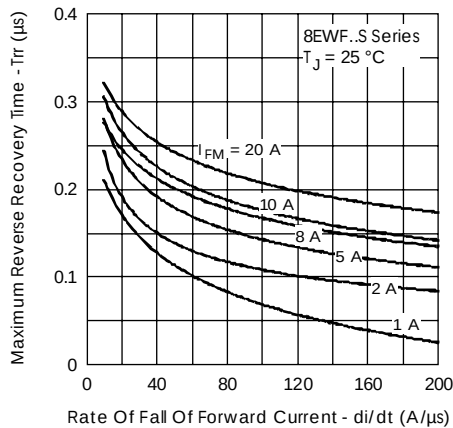


Fig. 8- Recovery Time Characteristics, $T_J = 25^\circ\text{C}$

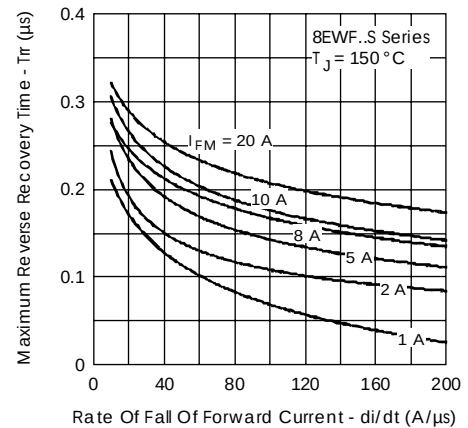


Fig. 9- Recovery Time Characteristics, $T_J = 150^\circ\text{C}$

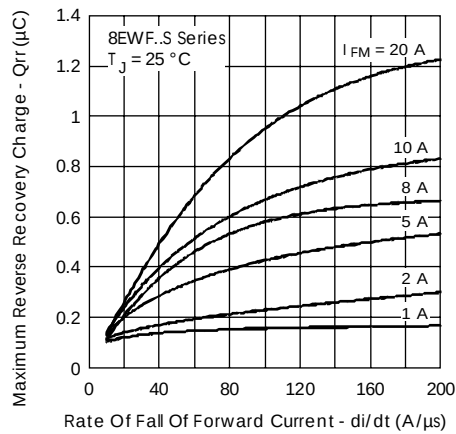


Fig. 10-Recovery Charge Characteristics, $T_J = 25^\circ\text{C}$

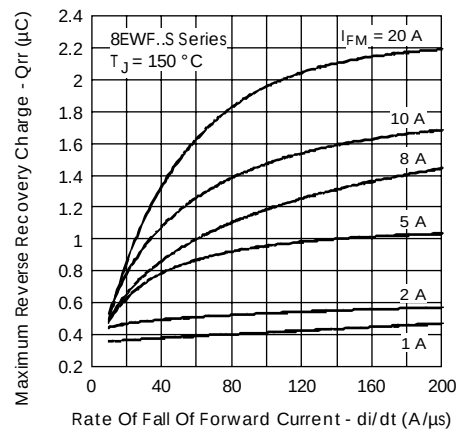


Fig. 11-Recovery Charge Characteristics, $T_J = 150^\circ\text{C}$

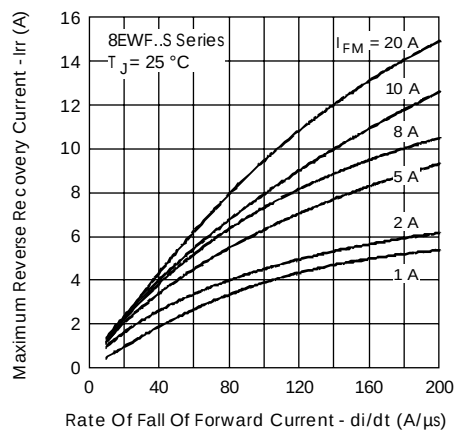


Fig. 12-Recovery Current Characteristics, $T_J = 25^\circ\text{C}$

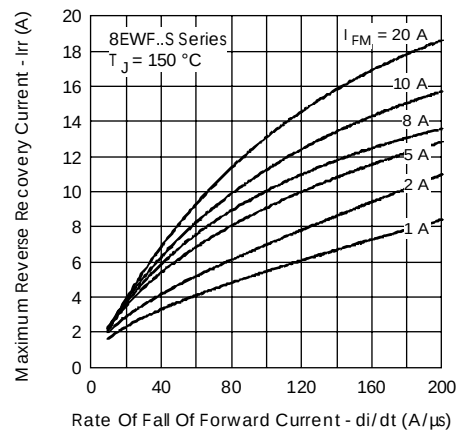


Fig. 13-Recovery Current Characteristics, $T_J = 150^\circ\text{C}$

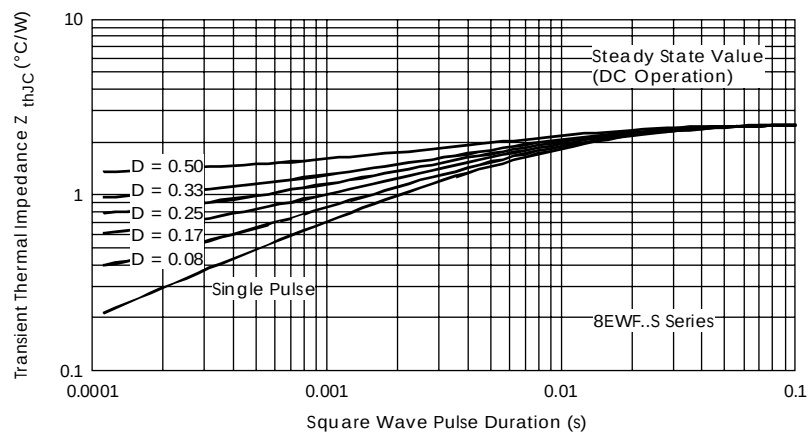



Fig. 14-Thermal Impedance Z_{thJC} Characteristics

Ordering Information Table


Device Code						
8	E	W	F	06	S	TRL
1	2	3	4	5	6	7
1	- Current Rating					
2	- Circuit Configuration:					
	E = Single Diode					
3	- Package:					
	W = D-Pak					
4	- Type of Silicon:					
	F = Fast Soft Recovery Rectifier					
5	- Voltage code: Code x 100 = V _{RRM}					
6	- S = Surface Mountable					
7	- Tape and Reel Option:					
	TRL = Left Orientation Reel					
	TRR = Right Orientation Reel					

02 = 200V
04 = 400V
06 = 600V

Outline Table

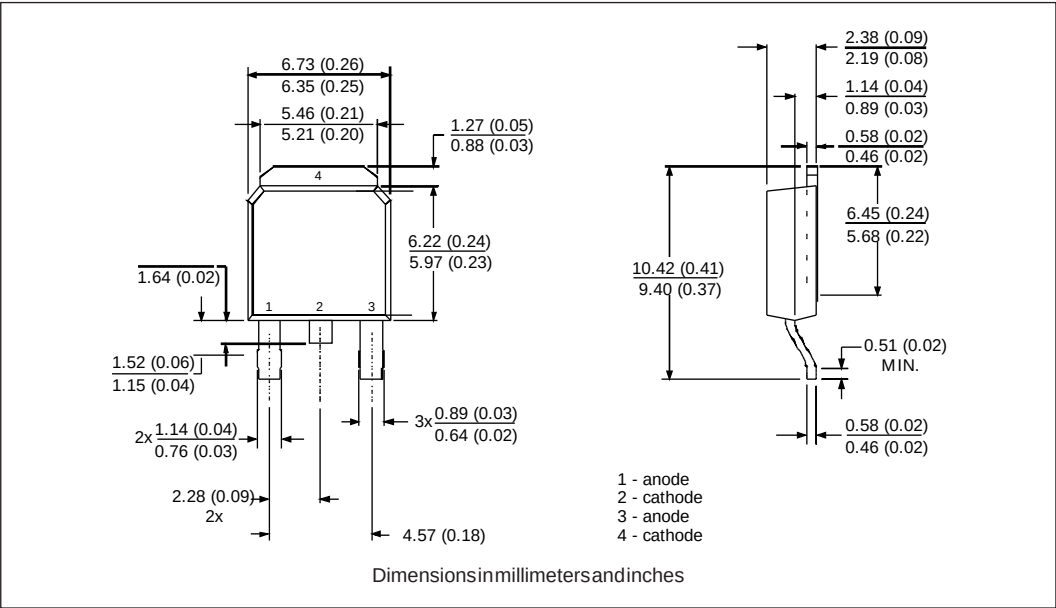

Marking Information

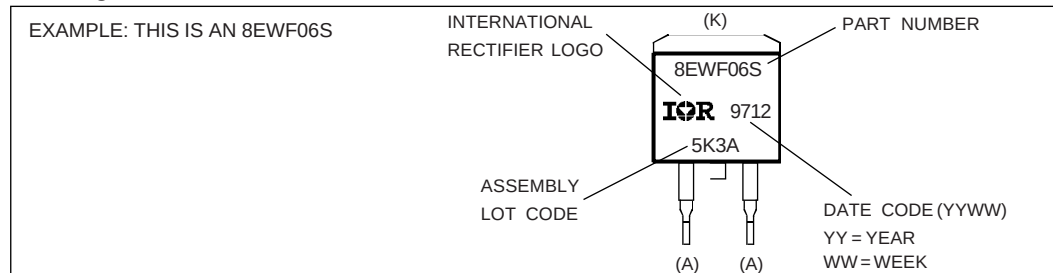

Tape & Reel Information

