

International IR Rectifier

RADIATION HARDENED POWER MOSFET SURFACE MOUNT (SMD-2)

PD - 91447B

IRHNA9064
JANSR2N7424U
60V, P-CHANNEL
REF: MIL-PRF-19500/655
RAD-Hard™ HEXFET® TECHNOLOGY

Product Summary

Part Number	Radiation Level	RDS(on)	Id	QPL Part Number
IRHNA9064	100K Rads (Si)	0.045Ω	-48A	JANSR2N7424U
IRHNA93064	300K Rads (Si)	0.045Ω	-48A	JANSF2N7424U

International Rectifier's RAD-Hard HEXFET™ technology provides high performance power MOSFETs for space applications. This technology has over a decade of proven performance and reliability in satellite applications. These devices have been characterized for both Total Dose and Single Event Effects (SEE). The combination of low Rds(on) and low gate charge reduces the power losses in switching applications such as DC to DC converters and motor control. These devices retain all of the well established advantages of MOSFETs such as voltage control, fast switching, ease of paralleling and temperature stability of electrical parameters.



SMD-2

Features:

- Single Event Effect (SEE) Hardened
- Low RDS(on)
- Low Total Gate Charge
- Proton Tolerant
- Simple Drive Requirements
- Ease of Parallelizing
- Hermetically Sealed
- Ceramic Package
- Light Weight
- Surface Mount

Absolute Maximum Ratings

Pre-Irradiation

	Parameter	Units	
Id @ VGS = -12V, TC = 25°C	Continuous Drain Current	A	-48
Id @ VGS = -12V, TC = 100°C	Continuous Drain Current		-30
IDM	Pulsed Drain Current ①	W	-192
PD @ TC = 25°C	Max. Power Dissipation		300
	Linear Derating Factor	W/C	2.4
VGS	Gate-to-Source Voltage		±20
EAS	Single Pulse Avalanche Energy ②	mJ	500
IAR	Avalanche Current ①	A	-48
EAR	Repetitive Avalanche Energy ①	mJ	30
dv/dt	Peak Diode Recovery dv/dt ③	V/ns	-4.4
TJ	Operating Junction Temperature	°C	-55 to 150
TSTG	Storage Temperature Range		
	Package Mounting Surface Temperature	g	300 (for 5 Sec.)
	Weight		3.3 (typical)

For footnotes refer to the last page

Electrical Characteristics @ $T_j = 25^\circ\text{C}$ (Unless Otherwise Specified)

	Parameter	Min	Typ	Max	Units	Test Conditions
BVDSS	Drain-to-Source Breakdown Voltage	-60	—	—	V	$V_{GS} = 0\text{V}, I_D = -1.0\text{mA}$
$\Delta BVDSS/\Delta T_J$	Temperature Coefficient of Breakdown Voltage	—	-0.055	—	$\text{V}/^\circ\text{C}$	Reference to 25°C , $I_D = -1.0\text{mA}$
RDS(on)	Static Drain-to-Source On-State Resistance	—	—	0.045	Ω	$V_{GS} = -12\text{V}, I_D = -30\text{A}$ ^④
		—	—	0.048		$V_{GS} = -12\text{V}, I_D = -48\text{A}$ ^④
VGS(th)	Gate Threshold Voltage	-2.0	—	-4.0	V	$V_{DS} = V_{GS}, I_D = -1.0\text{mA}$
gfs	Forward Transconductance	18	—	—	S (f)	$V_{DS} > -15\text{V}, I_{DS} = -30\text{A}$ ^④
IDSS	Zero Gate Voltage Drain Current	—	—	-25	μA	$V_{DS} = -48\text{V}, V_{GS}=0\text{V}$
		—	—	-250		$V_{DS} = -48\text{V}, V_{GS} = 0\text{V}, T_J = 125^\circ\text{C}$
IGSS	Gate-to-Source Leakage Forward	—	—	-100	nA	$V_{GS} = -20\text{V}$
IGSS	Gate-to-Source Leakage Reverse	—	—	100		$V_{GS} = 20\text{V}$
Qg	Total Gate Charge	—	—	300	nC	$V_{GS} = -12\text{V}, I_D = -48\text{A}$
Qgs	Gate-to-Source Charge	—	—	70		$V_{DS} = -30\text{V}$
Qgd	Gate-to-Drain ('Miller') Charge	—	—	91	ns	$V_{DD} = -30\text{V}, I_D = -48\text{A}, V_{GS} = -12\text{V}, R_G = 2.35\Omega$
t _{d(on)}	Turn-On Delay Time	—	—	35		
t _r	Rise Time	—	—	150		
t _{d(off)}	Turn-Off Delay Time	—	—	200		
t _f	Fall Time	—	—	200	nH	Measured from drain lead (6mm/0.25in. from package) to source lead (6mm/0.25in. from package)
L _{S + LD}	Total Inductance	—	4.0	—		
C _{iss}	Input Capacitance	—	6700	—	pF	$V_{GS} = 0\text{V}, V_{DS} = -25\text{V}$ $f = 1.0\text{MHz}$
C _{oss}	Output Capacitance	—	2800	—		
C _{rss}	Reverse Transfer Capacitance	—	920	—		

Source-Drain Diode Ratings and Characteristics

	Parameter	Min	Typ	Max	Units	Test Conditions
I _S	Continuous Source Current (Body Diode)	—	—	-48	A	
I _{SM}	Pulse Source Current (Body Diode) ^①	—	—	-192		
V _{SD}	Diode Forward Voltage	—	—	-3.0	V	$T_j = 25^\circ\text{C}, I_S = -48\text{A}, V_{GS} = 0\text{V}$ ^④
t _{rr}	Reverse Recovery Time	—	—	270	nS	$T_j = 25^\circ\text{C}, I_F = -48\text{A}, dI/dt \leq -100\text{A}/\mu\text{s}$
Q _{RR}	Reverse Recovery Charge	—	—	2.5	μC	$V_{DD} \leq -50\text{V}$ ^④
t _{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by L _{S + LD} .				

Thermal Resistance

	Parameter	Min	Typ	Max	Units	Test Conditions
R _{thJC}	Junction-to-Case	—	—	0.42	$^\circ\text{C}/\text{W}$	
R _{thJ-PCB}	Junction-to-PC board	—	1.6	—		Soldered to a 1" square copper-clad board

Note: Corresponding Spice and Saber models are available on the G&S Website.

For footnotes refer to the last page

Radiation Characteristics

IRHNA9064

International Rectifier Radiation Hardened MOSFETs are tested to verify their radiation hardness capability. The hardness assurance program at International Rectifier is comprised of two radiation environments. Every manufacturing lot is tested for total ionizing dose (per notes 5 and 6) using the TO-3 package. Both pre- and post-irradiation performance are tested and specified using the same drive circuitry and test conditions in order to provide a direct comparison.

Table 1. Electrical Characteristics @ $T_j = 25^\circ\text{C}$, Post Total Dose Irradiation⁽⁵⁾⁽⁶⁾

	Parameter	100KRads(Si) ¹		300K Rads (Si) ²		Units	Test Conditions
		Min	Max	Min	Max		
BV_{DSS}	Drain-to-Source Breakdown Voltage	-60	—	-60	—	V	$V_{GS} = 0\text{V}, I_D = -1.0\text{mA}$
$V_{GS(\text{th})}$	Gate Threshold Voltage	-2.0	-4.0	-2.0	-5.0		$V_{GS} = V_{DS}, I_D = -1.0\text{mA}$
I_{GSS}	Gate-to-Source Leakage Forward	—	-100	—	-100	nA	$V_{GS} = -20\text{V}$
I_{GSS}	Gate-to-Source Leakage Reverse	—	100	—	100		$V_{GS} = 20\text{V}$
I_{DSS}	Zero Gate Voltage Drain Current	—	-25	—	-25	μA	$V_{DS} = -48\text{V}, V_{GS} = 0\text{V}$
$R_{DS(on)}$	Static Drain-to-Source ^④ On-State Resistance (TO-3)	—	0.045	—	0.045	Ω	$V_{GS} = -12\text{V}, I_D = -30\text{A}$
$R_{DS(on)}$	Static Drain-to-Source ^④ On-State Resistance (SMD-2)	—	0.045	—	0.045	Ω	$V_{GS} = -12\text{V}, I_D = -30\text{A}$
V_{SD}	Diode Forward Voltage ^④	—	-3.0	—	-3.0	V	$V_{GS} = 0\text{V}, I_S = -48\text{A}$

1. Part number IRHNA9064 (JANSR2N7424U)

2. Part number IRHNA93064 (JANSF2N7424U)

International Rectifier radiation hardened MOSFETs have been characterized in heavy ion environment for Single Event Effects (SEE). Single Event Effects characterization is illustrated in Fig. a and Table 2.

Table 2. Single Event Effect Safe Operating Area

Ion	LET MeV/(mg/cm ²)	Energy (MeV)	Range (μm)	V _{DS} (V)				
				@V _{GS} =0V	@V _{GS} =5V	@V _{GS} =10V	@V _{GS} =15V	@V _{GS} =20V
Cu	28	285	43	-60	-60	-50	-35	—
Br	36.8	305	39	-55	-45	-35	-30	—
I	59.9	345	32.8	-40	-35	—	—	—

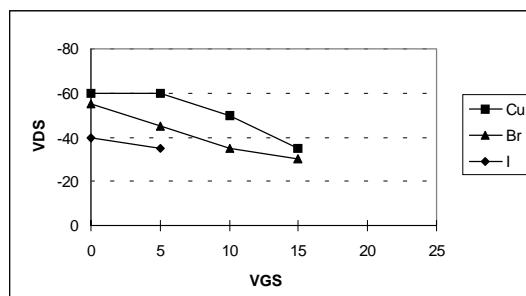


Fig a. Single Event Effect, Safe Operating Area

For footnotes refer to the last page

IRHNA9064

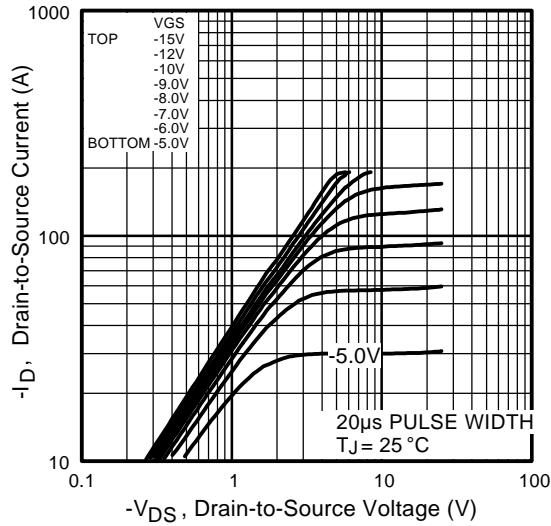


Fig1. Typical Output Characteristics

Pre-Irradiation

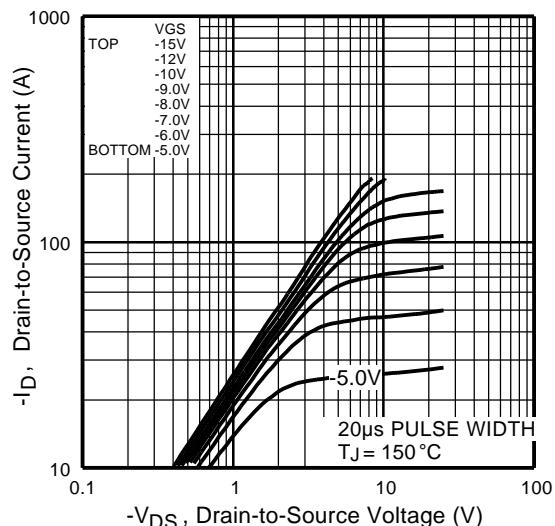


Fig2. Typical Output Characteristics

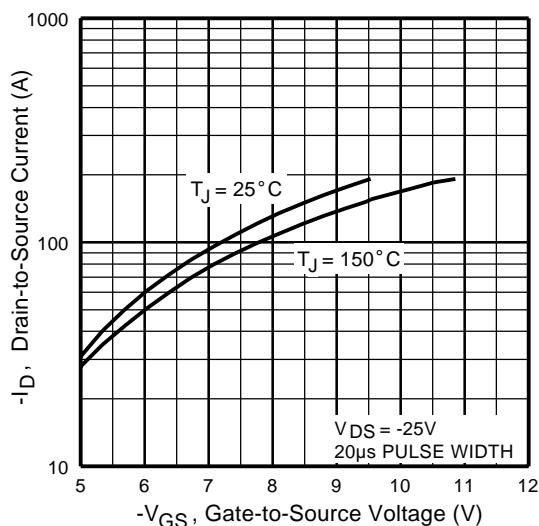


Fig3. Typical Transfer Characteristics

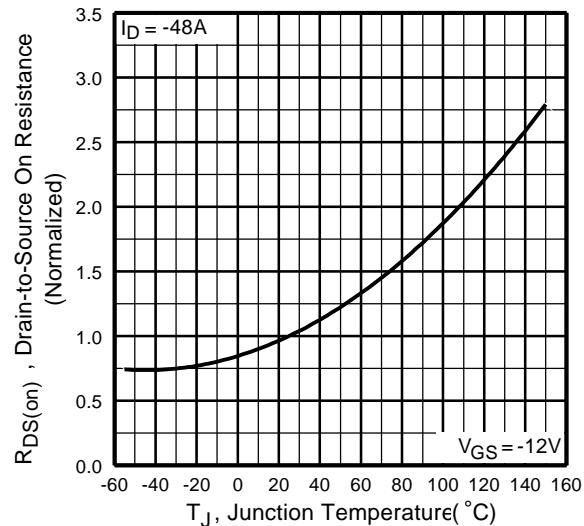


Fig4. Normalized On-Resistance Vs. Temperature

Pre-Irradiation

IRHNA9064

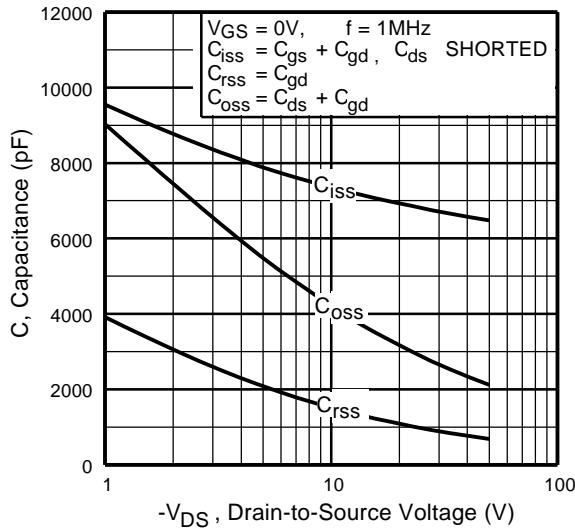


Fig5. Typical Capacitance Vs.
Drain-to-Source Voltage

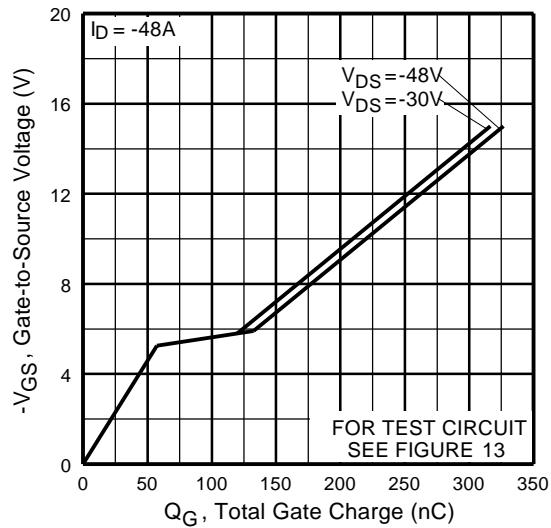


Fig6. Typical Gate Charge Vs.
Gate-to-Source Voltage

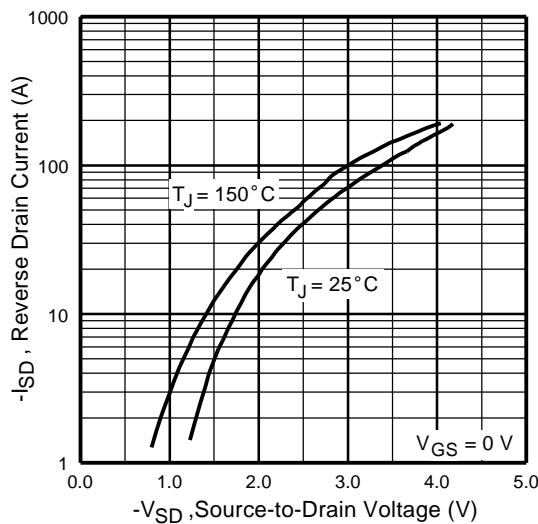


Fig7. Typical Source-Drain Diode
Forward Voltage

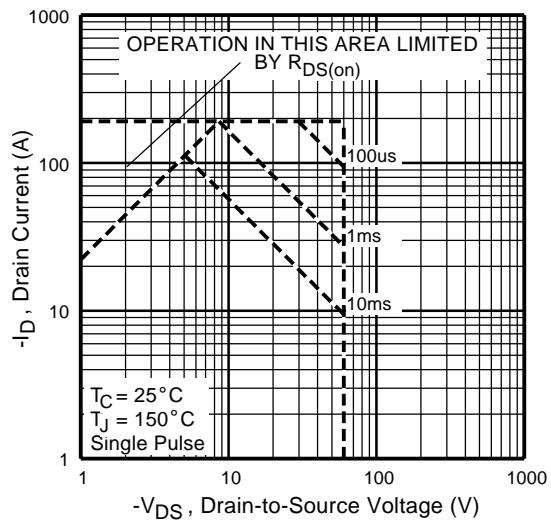


Fig8. Maximum Safe Operating Area

IRHNA9064

Pre-Irradiation

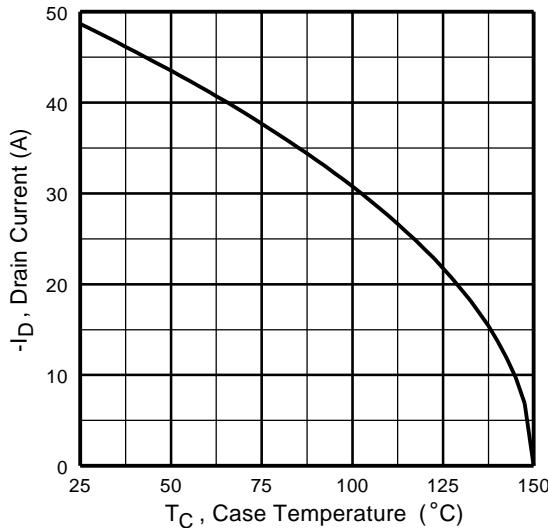


Fig9. Maximum Drain Current Vs.
Case Temperature

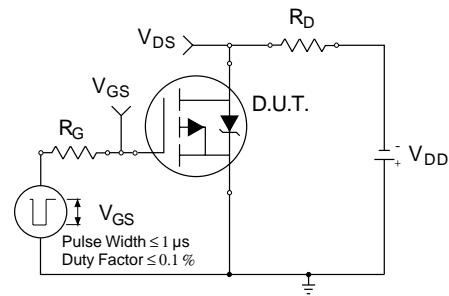


Fig10a. Switching Time Test Circuit

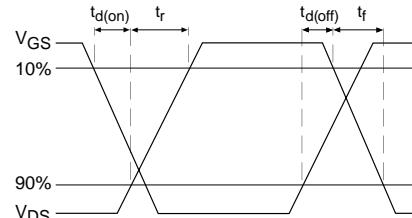


Fig10b. Switching Time Waveforms

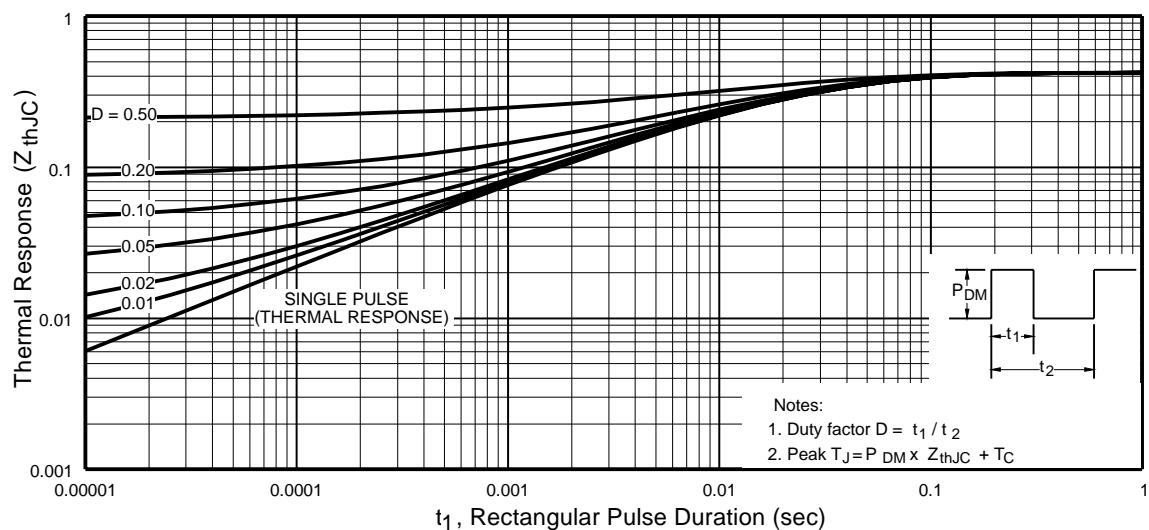


Fig11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

Pre-Irradiation

IRHNA9064

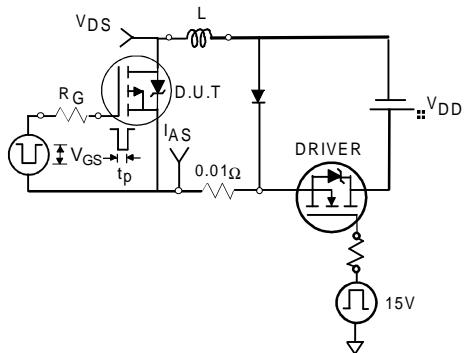


Fig12a. Unclamped Inductive Test Circuit

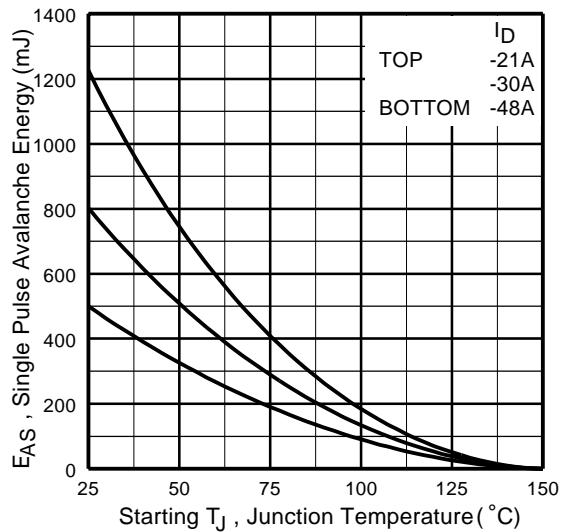
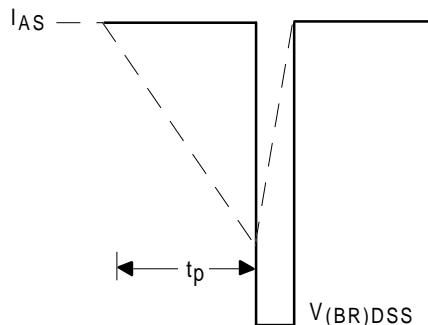


Fig12c. Maximum Avalanche Energy Vs. Drain Current

Fig12b. Unclamped Inductive Waveforms

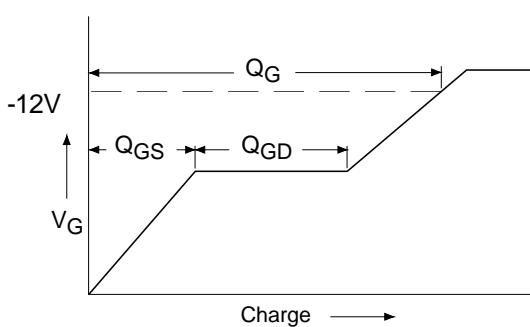


Fig13a. Basic Gate Charge Waveform

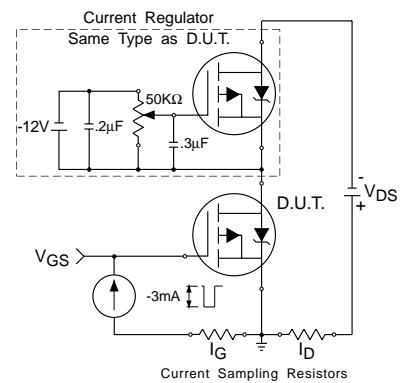


Fig13b. Gate Charge Test Circuit

IRHNA9064


Foot Notes:

- ① Repetitive Rating; Pulse width limited by maximum junction temperature.
- ② V_{DD} = -25V, starting T_J = 25°C, L=0.43mH
Peak I_L = -48A, V_{GS} = -12V
- ③ I_{SD} ≤ -48A, di/dt ≤ -150A/μs,
V_{DD} ≤ -60V, T_J ≤ 150°C

Pre-Irradiation

- ④ Pulse width ≤ 300 μs; Duty Cycle ≤ 2%
- ⑤ **Total Dose Irradiation with V_{GS} Bias.**
12 volt V_{GS} applied and V_{DS} = 0 during irradiation per MIL-STD-750, method 1019, condition A.
- ⑥ **Total Dose Irradiation with V_{DS} Bias.**
-48 volt V_{DS} applied and V_{GS} = 0 during irradiation per MIL-STD-750, method 1019, condition A.

Case Outline and Dimensions — SMD-2

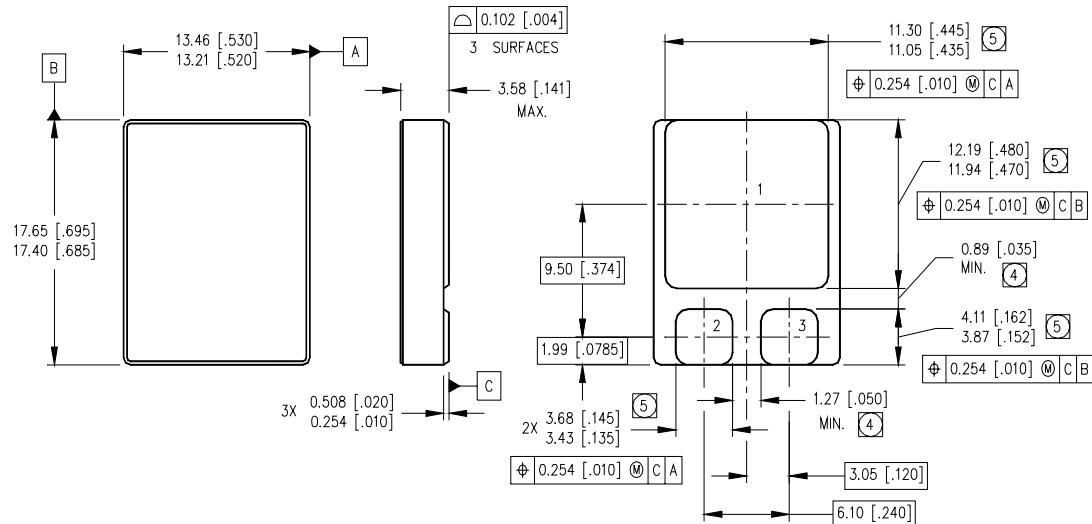

NOTES:

1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
- (4) DIMENSION INCLUDES METALLIZATION FLASH.
(5) DIMENSION DOES NOT INCLUDE METALLIZATION FLASH.

PAD ASSIGNMENTS

- | | | |
|---|---|--------|
| 1 | = | DRAIN |
| 2 | = | GATE |
| 3 | = | SOURCE |

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.
Data and specifications subject to change without notice. 1/02