

**TOSHIBA**

Under Development


**TMP88PU77**

CMOS 8-Bit Microcontroller

**TMP88PU77F**

The 88PU77 are the high-speed and high performance 8-bit single chip microcomputers which built in a program storage area (96 Kbyte) and the One-Time PROM of vector table storage area (256 byte). The 88PU77 is pin compatible with the 88CP77/S77/U77. The operations possible with the 88PU77 can be performed by writing programs to PROM. The 88PU77 can write and verify in the same way as the TC571000 an EPROM programmer.

PART No.	OTP	RAM	PACKAGE	ADAPTOR SOCKET
TMP88PU77F	96 Kbyte + 256 byte	3 Kbyte	P-QFP100-1420-0.65A	BM11150

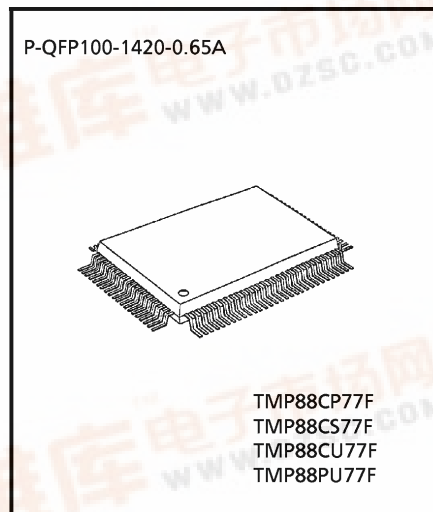


000707EBA1

- For a discussion of how the reliability of microcontrollers can be predicted, please refer to Section 1.3 of the chapter entitled Quality and Reliability Assurance / Handling Precautions.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.



Pin Assignments (Top View)

P-QFP100-1420-0.65A

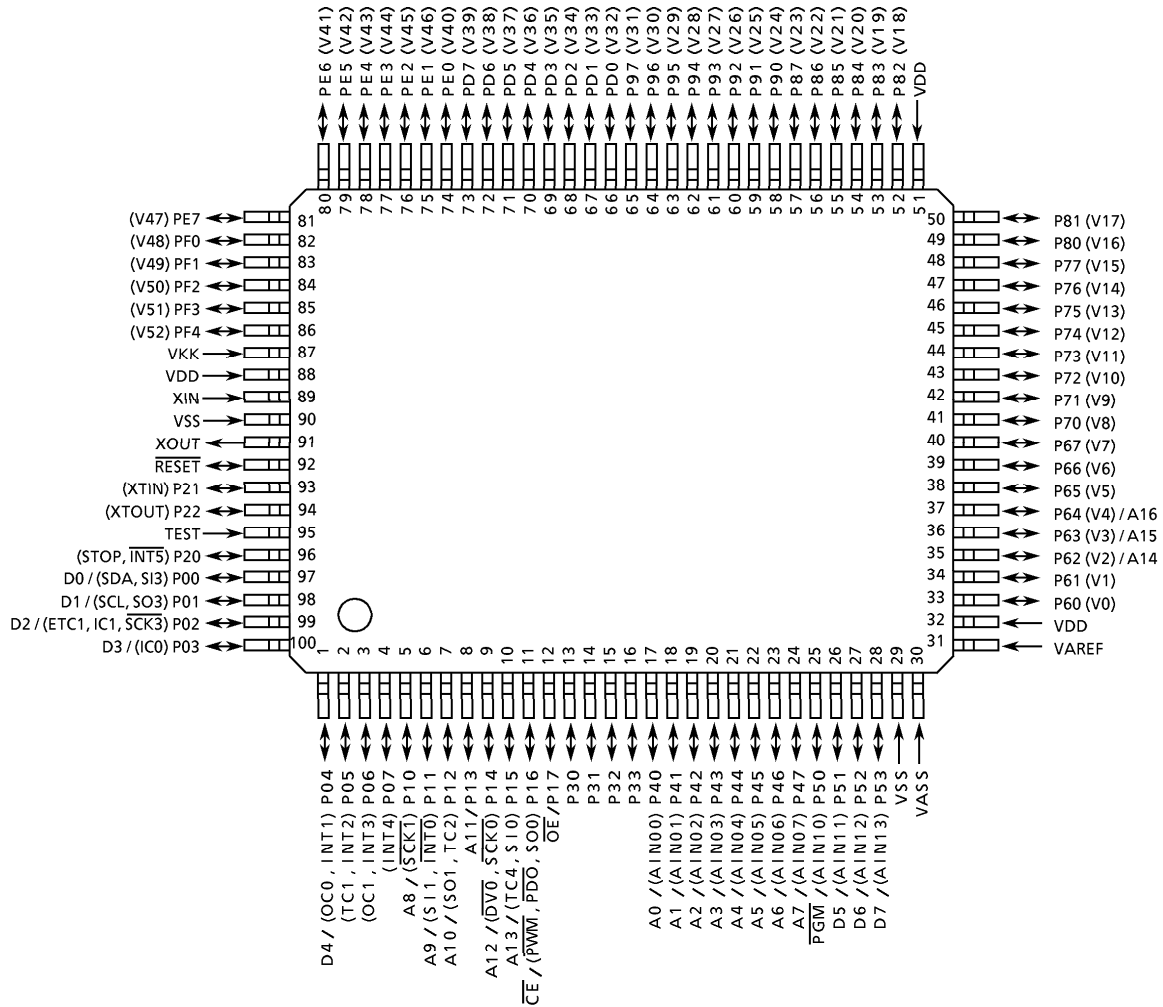

Note: All VDDs should be connected externally for keeping the same voltage level.

**Pin Function**

The 88PU77 has two modes: MCU and PROM.

- (1) MCU mode  
In this mode, the 88PU77 is pin compatible with the 88CP77/S77/U77 (fix the TEST pin at low level).
- (2) PROM mode

Pin Name (PROM mode)	Input/Output	Functions	Pin Name (MCU mode)
A16	Input	PROM address inputs	P64
A15 to A8			P63, P62, P15 to P10
A7 to A0			P47 to P40
D7 to D0	I/O	PROM data input/outputs	P53 to P51, P04 to P00
$\overline{CE}$	Input	Chip enable signal input (active low)	P16
$\overline{OE}$		Output enable signal input (active low)	P17
$\overline{PGM}$		Program mode single input	P50
VPP	Power supply	+ 12.75 V / 5 V (Program supply voltage)	TEST
VCC		+ 6.25 V / 5 V	VDD
GND		0 V	VSS
P07 to P05	Input	Pull-up with resistance for input processing	
P33 to P30			
P60			
P21			
P67, P66, P61			
PF4 to PF0, PE7 to PE0			
$\overline{RESET}$			
P65	Output	Open	
P77 to P70			
P87 to P80			
P97 to P90			
PD7 to PD0			
XIN	Input	Connect an 8 MHz oscillator to stabilize the internal state.	
XOUT	Output		
VAREF	Power supply	0 V (GND)	
VASS			
VKK			

**Operational Description**

The configuration and functions of the 88PU77 are the same as those of the 88CP77/S77/U77, except in that a one-time PROM is used instead of an on-chip mask ROM.

**1. Operating Mode**

The 88PU77 has two modes: MCU and PROM.

**1.1 MCU Mode**

The MCU mode is activated by fixing the TEST / VPP pin at low level.

In the MCU mode, operation is the same as with the 88CP77/S77/U77 (the TEST / VPP pin cannot be used open because it has no built-in pull-down resistance).

**1.1.1 Program memory**

The 88PU77 has a 96 Kbyte (addresses 04000<sub>H</sub> to 1BFFF<sub>H</sub> in the MCU mode, addresses 00000<sub>H</sub> to 17FFF<sub>H</sub> in the PROM mode) of program storage area and 256 byte (addresses FFF00 to FFFFF<sub>H</sub> in the MCU mode, addresses 1FF00 to 1FFFF<sub>H</sub> in the PROM mode) one-time PROM of vector table storage area.

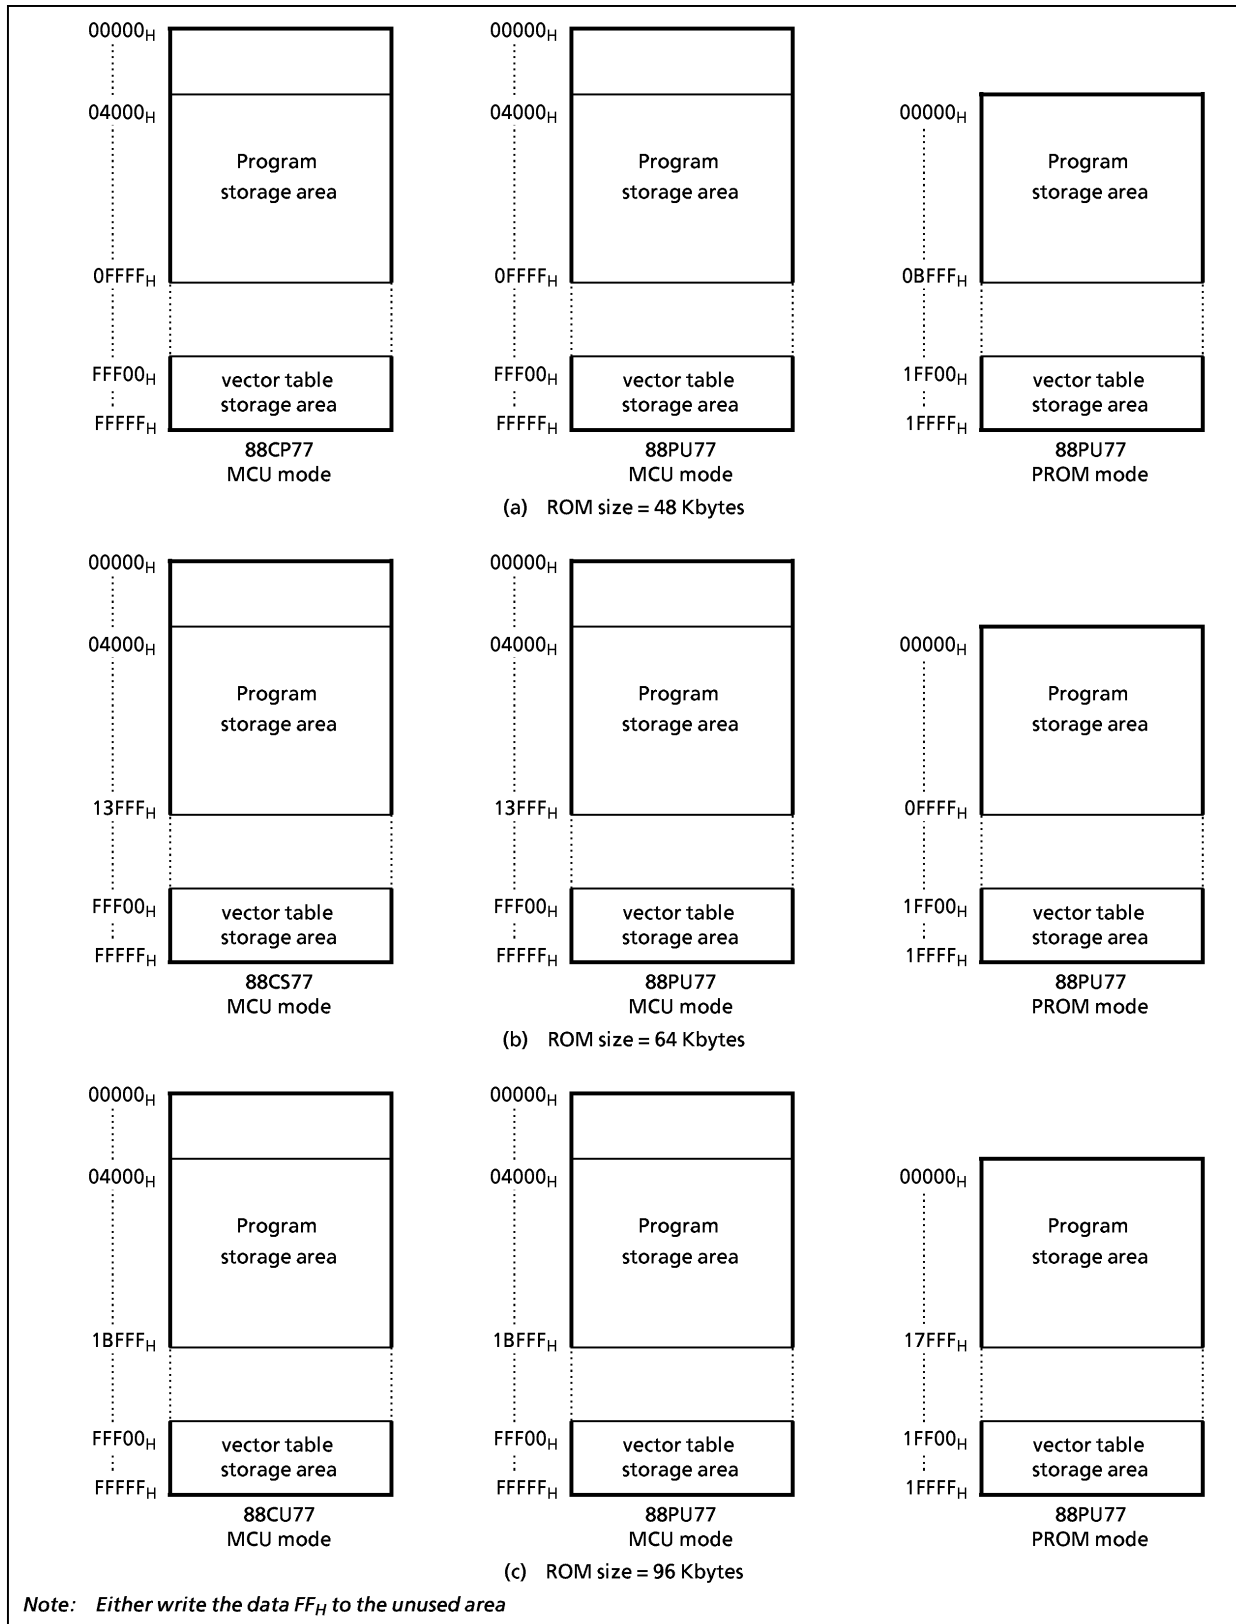


Figure 1-1. Program Storage Area

## Electrical Characteristics

Absolute Maximum Ratings		(V <sub>SS</sub> = 0 V)		
PARAMETER	SYMBOL	PINS	RATINGS	UNIT
Supply Voltage (* Note 3)	V <sub>DD</sub>		- 0.3 to 6.5	V
Program Voltage	V <sub>PP</sub>	TEST/VPP	- 0.3 to 13.0	V
Input Voltage	V <sub>IN1</sub>	P1, P2, P3, P4, P5, XOUT, RESET	- 0.3 to V <sub>DD</sub> + 0.3	V
	V <sub>IN2</sub>	P0 port	- 0.3 to 5.5 V	
Output Voltage	V <sub>OUT1</sub>	P1, P2, P3, P4, P5, XOUT, RESET	- 0.3 to V <sub>DD</sub> + 0.3	V
	V <sub>OUT2</sub>	P0 port	- 0.3 to 5.5 V	
	V <sub>OUT3</sub>	Source open drain ports	V <sub>DD</sub> - 40 to V <sub>DD</sub> + 0.3	
Output Current (Per 1 pin)	I <sub>OUT1</sub>	P0, P1, P2, P3, P4, P5 ports	3.2	mA
	I <sub>OUT2</sub>	P6, P7, P80, 81 Ports	- 25	
	I <sub>OUT3</sub>	P82 to P87, P9, PD, PE, PF ports	- 12	
Output Current (Total)	∑ I <sub>OUT1</sub>	P1, P3, P4, P5 ports	- 40	mA
	∑ I <sub>OUT2</sub>	P0, P1, P2, P3, P4, P5 ports	60	
	∑ I <sub>OUT3</sub>	P6, P7, P8, P9, PD, PE, PF ports	- 120	
Power Dissipation [Topr = 25°C]	PD	note	1200	mW
Soldering Temperature (time)	T <sub>sld</sub>		260 (10 s)	°C
Storage Temperature	T <sub>stg</sub>		- 55 to 125	°C
Operating Temperature	Topr		- 30 to 70	°C

Note 1: The absolute maximum ratings are rated values which must not be exceeded during operation, even for an instant. Any one of the ratings must not be exceeded. If any absolute maximum rating is exceeded, a device may break down or its performance may be degraded, causing it to catch fire or explode resulting in injury to the user. Thus, when designing products which include this device, ensure that no absolute maximum rating value will ever be exceeded.

Note 2: Power Dissipation (PD) ; For PD, it is necessary to decrease -14.3 mW/°C. (Reference to TMP88CP77/S77/U77)

Note 3: All VDDs should be connected externally for keeping the same voltage level.

Recommended Operating Conditions (V<sub>SS</sub> = 0 V, Topr = - 30 to 70°C)

PARAMETER	SYMBOL	PINS	CONDITIONS	Min	Max	UNIT
Supply Voltage	V <sub>DD</sub>		fc = 12.5 MHz	4.5	5.5	V
			NORMAL1, 2 modes			
			IDLE1, 2 modes			
			fs = 32.768 kHz	SLOW mode		
SLEEP mode						
			STOP mode	2.0		
Input High Voltage	V <sub>IH1</sub>	Except hysteresis input	V <sub>DD</sub> ≥ 4.5 V	V <sub>DD</sub> × 0.70	V <sub>DD</sub>	V
	V <sub>IH2</sub>	Hysteresis input		V <sub>DD</sub> × 0.75		
	V <sub>IH3</sub>			V <sub>DD</sub> < 4.5 V		
Input Low Voltage	V <sub>IL1</sub>	Except hysteresis input	V <sub>DD</sub> ≥ 4.5 V	0	V <sub>DD</sub> × 0.30	V
	V <sub>IL2</sub>	Hysteresis input			V <sub>DD</sub> × 0.25	
	V <sub>IL3</sub>				V <sub>DD</sub> < 4.5 V	
Clock Frequency	fc	XIN, XOUT	V <sub>DD</sub> = 4.5 V to 5.5 V	1.0	12.5	MHz
	fs	XTIN, XTOUT	V <sub>DD</sub> = 2.7 V to 5.5 V	30.0	34.0	kHz

Note: The recommended operating conditions for a device are operating conditions under which it can be guaranteed that the device will operate as specified. If the device is used under operating conditions other than the recommended operating conditions (supply voltage, operating temperature range, specified AC/DC values etc.), malfunction may occur. Thus, when designing products which include this device, ensure that the recommended operating conditions for the device are always adhered to.

D.C. Characteristics		(V <sub>SS</sub> = 0 V, T <sub>opr</sub> = -30 to 70°C)					
PARAMETER	SYMBOL	PINS	CONDITIONS	Min	Typ.	Max	UNIT
Hysteresis Voltage	V <sub>HS</sub>	Hysteresis input		-	0.9	-	V
Input Current	I <sub>IN1</sub>	TEST	V <sub>DD</sub> = 5.5 V V <sub>IN</sub> = 5.5 V / 0 V	-	-	± 2	μA
	I <sub>IN2</sub>	Open drain ports, Tri-state ports					
	I <sub>IN3</sub>	RESET, STOP					
	I <sub>IN4</sub>	PD, PE, PF ports (Note3)					
Input Resistance	R <sub>IN3</sub>	RESET		100	220	450	kΩ
Pull-down Resistance	R <sub>K</sub>	Source open drain ports	V <sub>DD</sub> = 5.5 V, V <sub>KK</sub> = -30 V	50	80	110	kΩ
Output Leakage Current	I <sub>LO1</sub>	Sink open drain ports	V <sub>DD</sub> = 5.5 V, V <sub>OUT</sub> = 5.5 V	-	-	2	μA
	I <sub>LO2</sub>	Source open drain ports	V <sub>DD</sub> = 5.5 V, V <sub>OUT</sub> = -32 V	-	-	-2	
	I <sub>LO3</sub>	Tri-state ports	V <sub>DD</sub> = 5.5 V, V <sub>OUT</sub> = 5.5 V / 0 V	-	-	2	
Output High Voltage	V <sub>OH2</sub>	Tri-state ports	V <sub>DD</sub> = 4.5 V, I <sub>OH</sub> = -0.7 mA	4.1	-	-	V
Output Low Voltage	V <sub>OL</sub>	Except XOUT	V <sub>DD</sub> = 4.5 V, I <sub>OL</sub> = 1.6 mA	-	-	0.4	V
Output High current	I <sub>OH1</sub>	P6, P7, P80, P81 port	V <sub>DD</sub> = 4.5 V, V <sub>OH</sub> = 2.4 V	-	-30	-	mA
	I <sub>OH2</sub>	P82 to P87, P9, PD, PE, PF ports		-	-15	-	
Supply Current in NORMAL 1, 2 modes	I <sub>DD</sub>		V <sub>DD</sub> = 5.5 V V <sub>IN</sub> = 5.3 V / 0.2 V f <sub>c</sub> = 12.5 MHz f <sub>s</sub> = 32.768 kHz	-	15	22	mA
Supply Current in IDLE 1, 2 modes				-	6	12	
Supply Current in SLOW mode				-	30	60	μA
Supply Current in SLEEP mode				-	15	30	
Supply Current in STOP mode				-	0.5	10	

**Note 1:** Typical values show those at T<sub>opr</sub> = 25°C, V<sub>DD</sub> = 5 V.

**Note 2:** Input Current I<sub>IN1</sub>, I<sub>IN3</sub>; The current through resistor is not included, when the input resistor (pull-up/pull-down) is contained.

**Note 3:** Input Current I<sub>IN4</sub>; The current when the pull-down register (R<sub>K</sub>) is not connected by the mask option.

AD Conversion Characteristics		(V <sub>SS</sub> = 0 V, V <sub>DD</sub> = 4.5 to 5.5 V, T <sub>opr</sub> = -30 to 70°C)					
PARAMETER	SYMBOL	CONDITIONS	Min	Typ.	Max	UNIT	
Analog Reference Voltage	V <sub>AREF</sub>		4.5	-	V <sub>DD</sub>	V	
	V <sub>ASS</sub>						V <sub>SS</sub>
Analog Reference Voltage Range	V <sub>AIN</sub>		V <sub>ASS</sub>	-	V <sub>AREF</sub>	V	
Analog Input Voltage	I <sub>REF</sub>	V <sub>AREF</sub> = 5.5 V, V <sub>ASS</sub> = 0.0 V	-	0.5	1.0	mA	
Nonlinearity Error		V <sub>DD</sub> = 5.0 V, V <sub>SS</sub> = 0.0 V V <sub>AREF</sub> = 5.000 V V <sub>ASS</sub> = 0.000 V	-	-	± 1	LSB	
Zero Point Error			-	-	± 1		
Full Scale Error			-	-	± 1		
Total Error			-	-	± 2		

**Note:** Quantizing error is not contained in those errors.

A.C. Characteristics


( $V_{SS} = 0\text{ V}$ ,  $V_{DD} = 4.5\text{ to }5.5\text{ V}$ ,  $T_{opr} = -30\text{ to }70^\circ\text{C}$ )

PARAMETER	SYMBOL	CONDITIONS	Min	Typ.	Max	UNIT
Machine Cycle Time	t <sub>cy</sub>	In NORMAL1, 2 modes	0.32	-	10	μs
		In IDLE1, 2 modes				
		In SLOW mode	117.6	-	133.3	
		In SLEEP mode				
High Level Clock Pulse Width	t <sub>WCH</sub>	For external clock operation (XIN input), f <sub>c</sub> = 12.5 MHz	32	-	-	ns
Low Level Clock Pulse Width	t <sub>WCL</sub>					
High Level Clock Pulse Width	t <sub>WSH</sub>	For external clock operation (XTIN input), f <sub>s</sub> = 32.768 kHz	15.2	-	-	μs
Low Level Clock Pulse Width	t <sub>WSL</sub>					


Recommended Oscillating Conditions

( $V_{SS} = 0\text{ V}$ ,  $V_{DD} = 4.5\text{ to }5.5\text{ V}$ ,  $T_{opr} = -30\text{ to }70^\circ\text{C}$ )

PARAMETER	Oscillator	Oscillation Frequency	Recommended Oscillator		Recommended Constant	
					C <sub>1</sub>	C <sub>2</sub>
High-frequency Oscillation	Ceramic Resonator	12.5 MHz	Murata	CSA12.5MTZ	30 pF	30 pF
		8 MHz	Murata	CSA8.00MTZ	30 pF	30 pF
	Crystal Oscillator	12.5 MHz	NDK	AT-51	10 pF	10 pF
Low-frequency Oscillation	Crystal Oscillator	32.768 kHz	NDK	MX-38T	15 pF	15 pF



(1) High-frequency Oscillation



(2) Low-frequency Oscillation

**Note:** An electrical shield by metal shield plate on the IC package should be recommend able in order to prevent the device from the high electric fieldstress applied for continuous reliable operation.




D.C./A.C. Characteristics (PROM mode) ( $V_{SS} = 0\text{ V}$ )

(1) Read Operation ( $V_{DD} = 5.0 \pm 0.25\text{ V}$ ,  $T_{opr} = 25 \pm 5^\circ\text{C}$ )


PARAMETER	SYMBOL	CONDITIONS	Min	Typ.	Max	UNIT
Input High Voltage (A0 to A16, $\overline{\text{CE}}$ , $\overline{\text{OE}}$ , $\overline{\text{PGM}}$ )	$V_{IH4}$		$V_{DD} \times 0.7$	–	$V_{DD}$	V
Input Low Voltage (A0 to A16, $\overline{\text{CE}}$ , $\overline{\text{OE}}$ , $\overline{\text{PGM}}$ )	$V_{IL4}$		0	–	0.8	V
Program Power Supply Voltage	$V_{PP}$		4.75	5.0	5.25	V
Address Access Time	$t_{ACC}$		–	$1.5t_{cyc} + 300$	–	ns

Note:  $t_{cyc} = 500\text{ ns}$  at 8 MHz

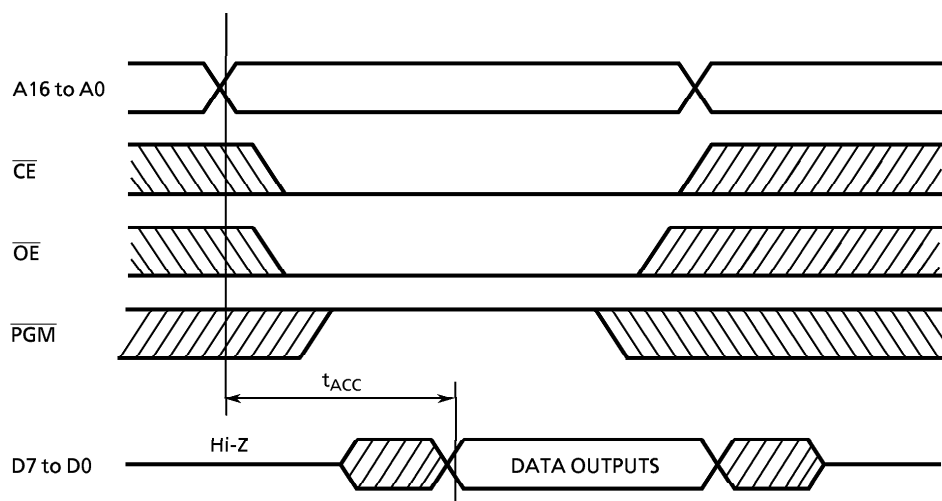

(2) High-Speed Programming Operation ( $T_{opr} = 25 \pm 5^\circ\text{C}$ ,  $V_{DD} = 6.25 \pm 0.25\text{ V}$ )

PARAMETER	SYMBOL	CONDITIONS	Min	Typ.	Max	UNIT
Input High Voltage (D0 to D7, A0 to A16, $\overline{\text{CE}}$ , $\overline{\text{OE}}$ , $\overline{\text{PGM}}$ )	$V_{IH4}$		$V_{DD} \times 0.7$	–	$V_{DD}$	V
Input Low Voltage (D0 to D7, A0 to A16, $\overline{\text{CE}}$ , $\overline{\text{OE}}$ , $\overline{\text{PGM}}$ )	$V_{IL4}$		0	–	0.8	V
Program Power Supply Voltage	$V_{PP}$		12.5	12.75	13.0	V
Initial Program Pulse Width	$t_{PW}$	$V_{DD} = 6.0\text{ V}$	0.095	0.1	0.105	ms

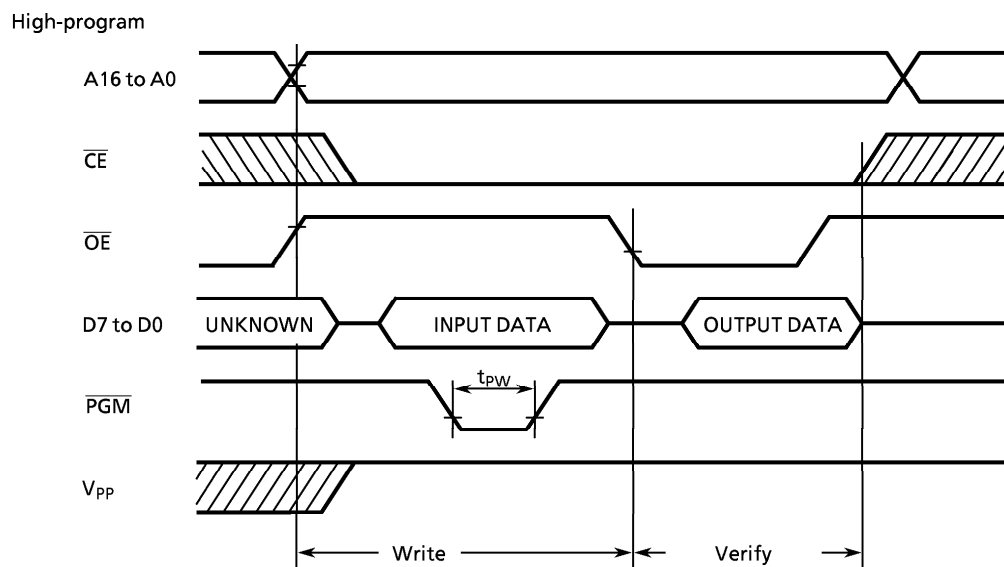

**Note1:** When  $V_{cc}$  power supply is turned on or after,  $V_{pp}$  must be increased.

When  $V_{cc}$  power supply is turned off or before,  $V_{pp}$  must be decreased.

**Note2:** The device must not be set to the EPROM programmer or picked up from it under applying the program voltage ( $12.75\text{ V} \pm 0.5\text{ V}$ ) to the  $V_{pp}$  pin as the device is damaged.

**Note3:** Be sure to execute the recommended programming mode with the recommended programming adaptor. If a mode or an adaptor except the above, the misoperation sometimes occurs.

Typical Characteristics

(Ta = 25°C)

