



# STTH15R06D/FP

## TURBO 2 ULTRAFAST HIGH VOLTAGE RECTIFIER

### MAIN PRODUCT CHARACTERISTICS

$I_{F(AV)}$	15 A
$V_{RRM}$	600 V
$I_{RM}(\text{typ.})$	8 A
$T_j(\text{max})$	175 °C
$V_F(\text{max})$	1.8 V
$\text{trr}(\text{max})$	50 ns

### FEATURES AND BENEFITS

- Ultrafast switching
- Low reverse recovery current
- Reduces switching losses
- Low thermal resistance


### DESCRIPTION

The STTH15R06D/FP, which is using ST Turbo 2 600V technology, is specially suited as boost diode in continuous mode power factor corrections and hard switching conditions.

The device is also intended for use as a free wheeling diode in power supplies and other power switching applications.

### ABSOLUTE RATINGS (limiting values)

Symbol	Parameter	Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage	600	V
$I_{F(\text{RMS})}$	RMS forward current	30	A
$I_{F(\text{AV})}$	Average forward current	15	A
$I_{FSM}$	Surge non repetitive forward current	120	A
$T_{\text{stg}}$	Storage temperature range	- 65 + 175	°C
$T_j$	Maximum operating junction temperature	+ 175	°C

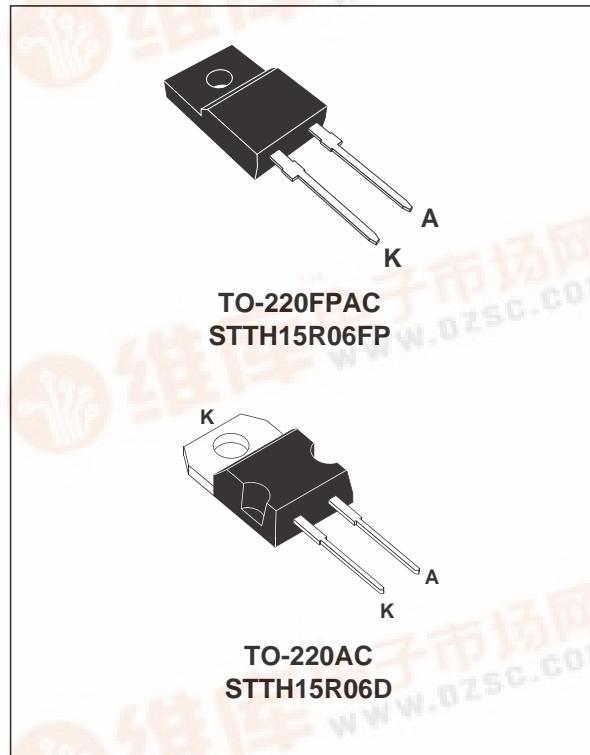

## STTH15R06D/FP

---

### THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
$R_{th(j-c)}$	Junction to case	TO-220AC	1.5	$^{\circ}\text{C/W}$
		TO-220FPAC	4.0	

### STATIC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Tests conditions		Min.	Typ.	Max.	Unit
$I_R$	Reverse leakage current	$V_R = 600\text{V}$	$T_j = 25^{\circ}\text{C}$			60	$\mu\text{A}$
			$T_j = 125^{\circ}\text{C}$		70	800	
$V_F$	Forward voltage drop	$I_F = 15\text{ A}$	$T_j = 25^{\circ}\text{C}$			2.9	$\text{V}$
			$T_j = 125^{\circ}\text{C}$		1.4	1.8	


To evaluate the maximum conduction losses use the following equation :

$$P = 1.16 \times I_{F(AV)} + 0.043 I_F^2(\text{RMS})$$


### DYNAMIC ELECTRICAL CHARACTERISTICS

Symbol	Tests conditions		Min.	Typ.	Max.	Unit	
$t_{rr}$	$I_F = 0.5\text{ A} \quad I_{rr} = 0.25\text{ A} \quad I_R = 1\text{ A}$		$T_j = 25^{\circ}\text{C}$			30	$\text{ns}$
	$I_F = 1\text{ A} \quad dI_F/dt = -50\text{ A}/\mu\text{s}$ $V_R = 30\text{V}$					50	
$I_{RM}$	$V_R = 400\text{ V} \quad I_F = 15\text{A}$ $dI_F/dt = -200\text{A}/\mu\text{s}$		$T_j = 125^{\circ}\text{C}$		7.5	9.0	A
S factor					0.15		
Qrr					220		$\text{nC}$
$t_{fr}$	$I_F = 15\text{ A} \quad dI_F/dt = 120\text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{F\max}$		$T_j = 25^{\circ}\text{C}$			200	$\text{ns}$
$V_{FP}$						6	$\text{V}$


**Fig. 1:** Conduction losses versus average current.

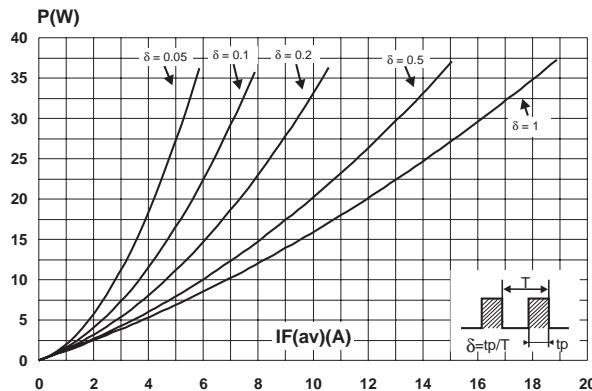


**Fig. 3-1:** Relative variation of thermal impedance junction to case versus pulse duration (TO-220AC).

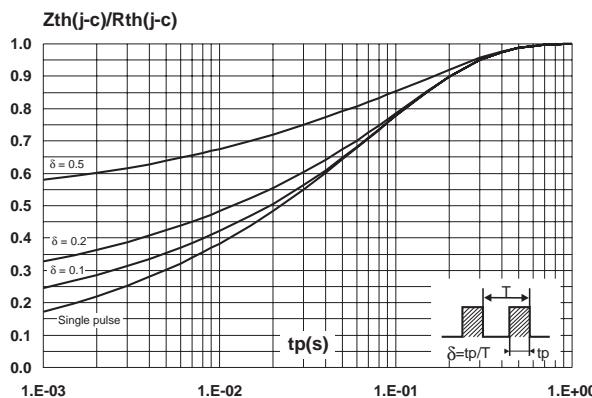


**Fig. 4:** Peak reverse recovery current versus  $dI_F/dt$  (90% confidence).

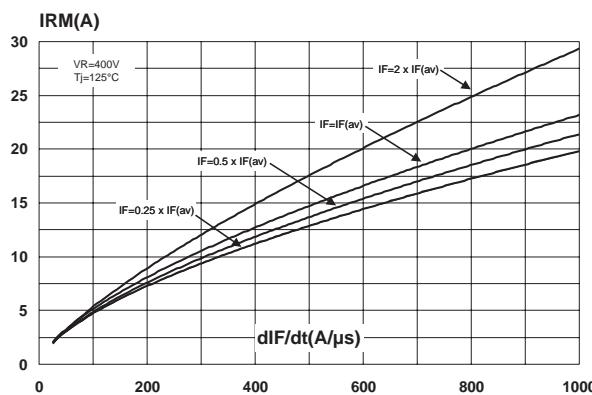


**Fig. 2:** Forward voltage drop versus forward current.

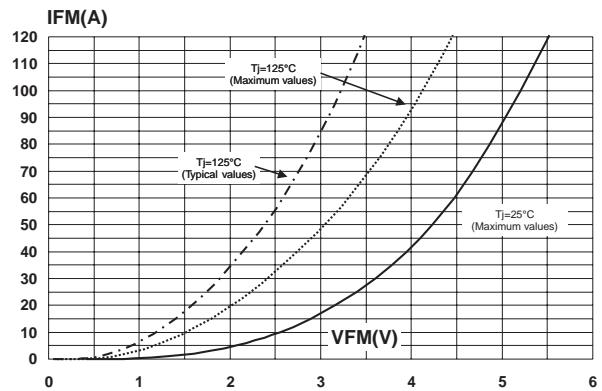

**Fig. 3-2:** Relative variation of thermal impedance junction to case versus pulse duration (TO-220FPAC).

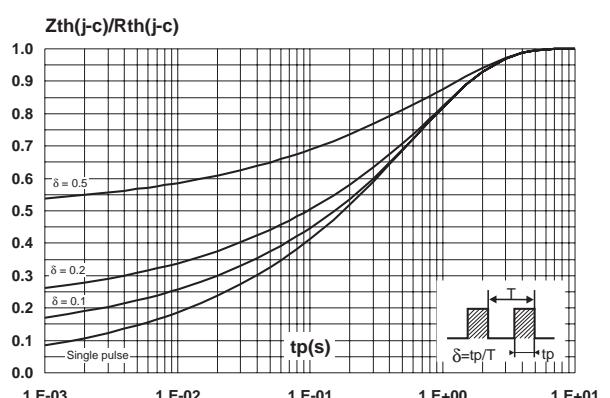


**Fig. 5:** Reverse recovery time versus  $dI_F/dt$  (90% confidence).

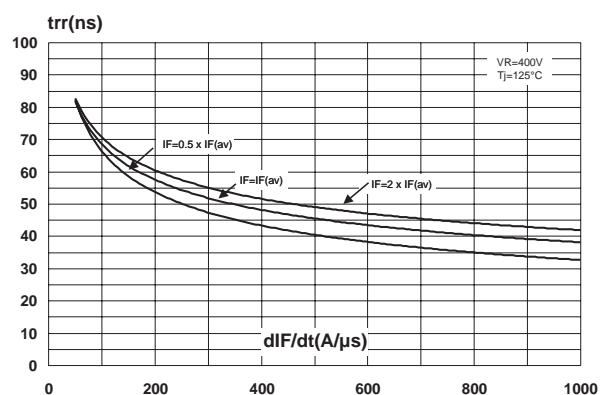


## STTH15R06D/FP


**Fig. 6:** Reverse recovery charges versus  $dI_F/dt$  (90% confidence).

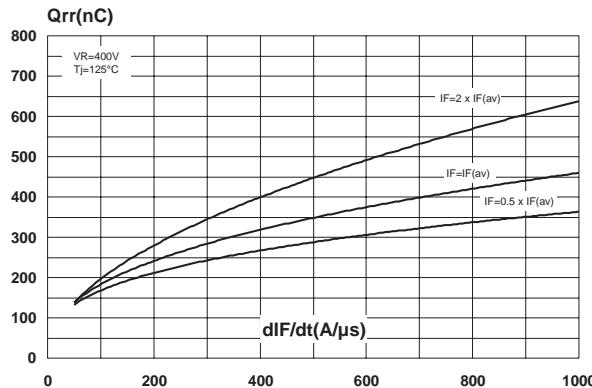


**Fig. 7:** Softness factor versus  $dI_F/dt$  (typical values).

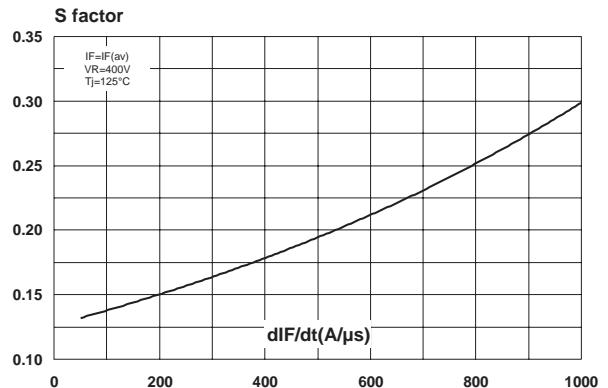


**Fig. 8:** Relative variation of dynamic parameters versus junction temperature.

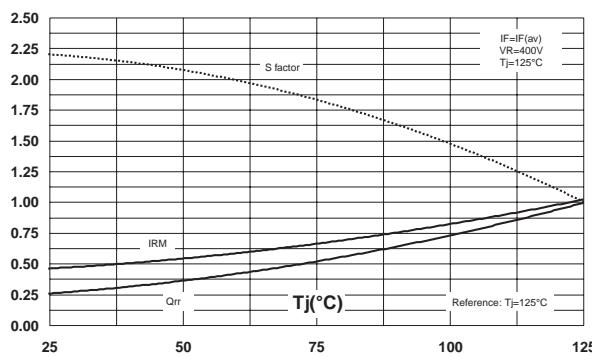


**Fig. 9:** Transient peak forward voltage versus  $dI_F/dt$  (90% confidence).

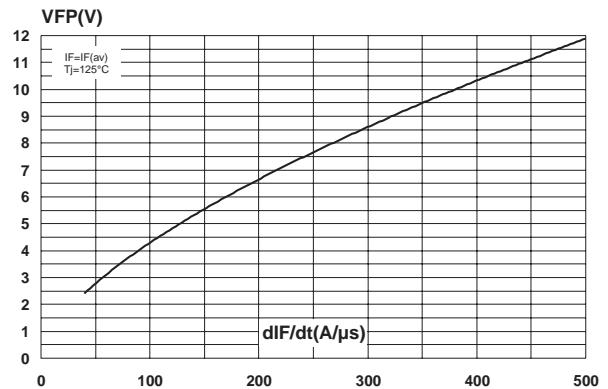


**Fig. 10:** Forward recovery time versus  $dI_F/dt$  (90% confidence).

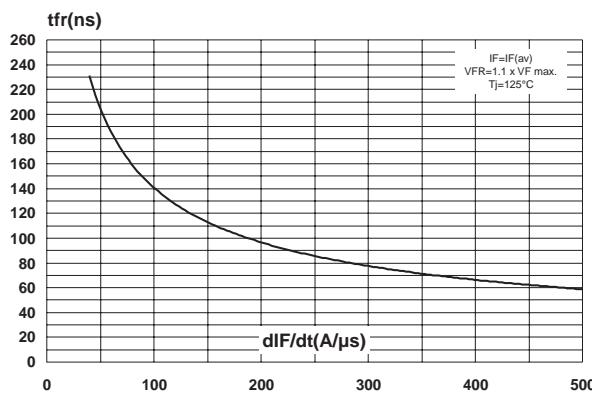

**Fig. 11:** Junction capacitance versus reverse voltage applied (typical values).

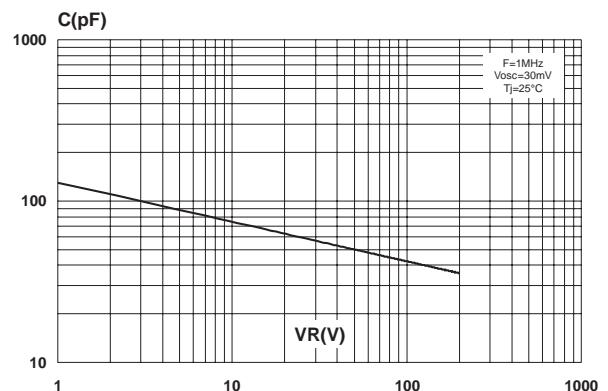


**PACKAGE MECHANICAL DATA**  
TO-220FPAC

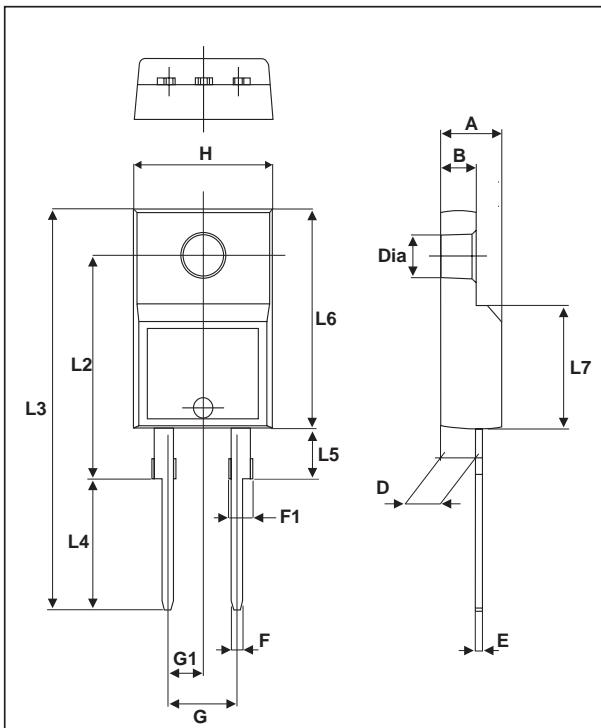

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.4	4.6	0.173	0.181
B	2.5	2.7	0.098	0.106
D	2.5	2.75	0.098	0.108
E	0.45	0.70	0.018	0.027
F	0.75	1	0.030	0.039
F1	1.15	1.70	0.045	0.067
G	4.95	5.20	0.195	0.205
G1	2.4	2.7	0.094	0.106
H	10	10.4	0.393	0.409
L2	16 Typ.		0.63 Typ.	
L3	28.6	30.6	1.126	1.205
L4	9.8	10.6	0.386	0.417
L5	2.9	3.6	0.114	0.142
L6	15.9	16.4	0.626	0.646
L7	9.00	9.30	0.354	0.366
Dia.	3.00	3.20	0.118	0.126

**PACKAGE MECHANICAL DATA**  
TO-220AC

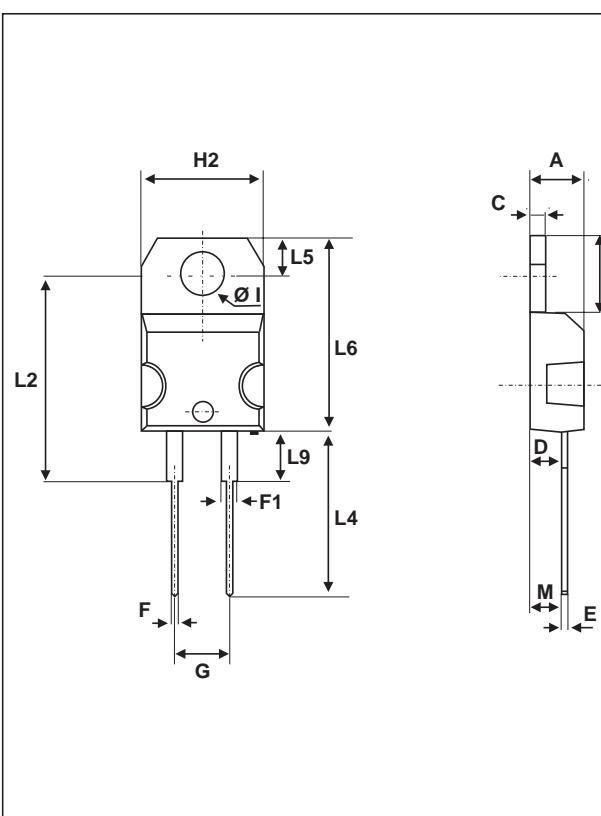

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.40	4.60	0.173	0.181
C	1.23	1.32	0.048	0.051
D	2.40	2.72	0.094	0.107
E	0.49	0.70	0.019	0.027
F	0.61	0.88	0.024	0.034
F1	1.14	1.70	0.044	0.066
G	4.95	5.15	0.194	0.202
H2	10.00	10.40	0.393	0.409
L2	16.40 typ.		0.645 typ.	
L4	13.00	14.00	0.511	0.551
L5	2.65	2.95	0.104	0.116
L6	15.25	15.75	0.600	0.620
L7	6.20	6.60	0.244	0.259
L9	3.50	3.93	0.137	0.154
M	2.6 typ.		0.102 typ.	
Diam. I	3.75	3.85	0.147	0.151

## **STTH15R06D/FP**

---

<b>Ordering code</b>	<b>Marking</b>	<b>Package</b>	<b>Weight</b>	<b>Base qty</b>	<b>Delivery mode</b>
STTH15R06D	STTH15R06D	TO-220AC	1.9 g	50	Tube
STTH15R06FP	STTH15R06FP	TO-220FPAC	1.7 g	50	Tube

- Cooling method: by conduction (C)
- Recommended torque value (TO-220AC): 0.55 Nm
- Maximum torque value (TO-220AC / TO-220FPAC): 0.7 Nm
- Epoxy meets UL 94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.  
STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany  
Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore  
Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>