

**HMC****HM9270**  
**DTMF Receiver****Features**

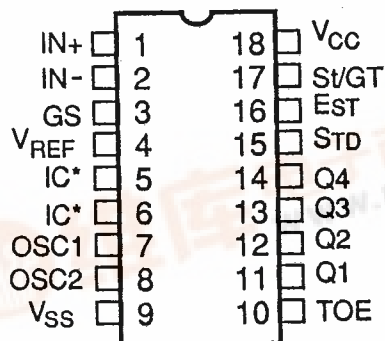
- Complete receiver in an 18-pin package
- Excellent performance
- CMOS, single 5 volt operation
- Minimum board area
- Central office quality
- Low power consumption

**Applications:**

- Telephone answer machine
- PABXs
- Central office
- Key system
- Remote control
- Remote data entry

**Pin Assignment**

HM9270

\*\* Connect to V<sub>SS</sub>**Decoder Output Table:**

Flow	Fhigh	KEY	TOE	Q4	Q3	Q2	Q1
697	1209	1	H	0	0	0	1
697	1336	2	H	0	0	1	0
697	1477	3	H	0	0	1	1
770	1209	4	H	0	1	0	0
770	1336	5	H	0	1	0	1
770	1477	6	H	0	1	1	0
852	1209	7	H	0	1	1	1
852	1336	8	H	1	0	0	0
852	1477	9	H	1	0	0	1
941	1336	0	H	1	0	1	0
941	1209	*	H	1	0	1	1
941	1477	#	H	1	1	0	0
697	1633	A	H	1	1	0	1
770	1633	B	H	1	1	1	0
852	1633	C	H	1	1	1	1
941	1633	D	H	0	0	0	0
-	-	ANY	L	Z	Z	Z	Z

L=LOGIC LOW, H=LOGIC HIGH, Z=HIGH IMPEDANCE