


FAST RECOVERY DIODE

27.7A/100~200V/trr: 50nsec

加急白漆
C25P10F C25P20F
C25P10FR C25P20FR

FEATURES

- Similar to TO-247AC (TO-3P) Case
- Dual Diodes - Cathode Common and Anode Common (Type - R)
- Ultra - Fast Recovery
- Low Forward Voltage Drop
- High Surge Capability
- 100 Volts thru 400 Volts Types Available

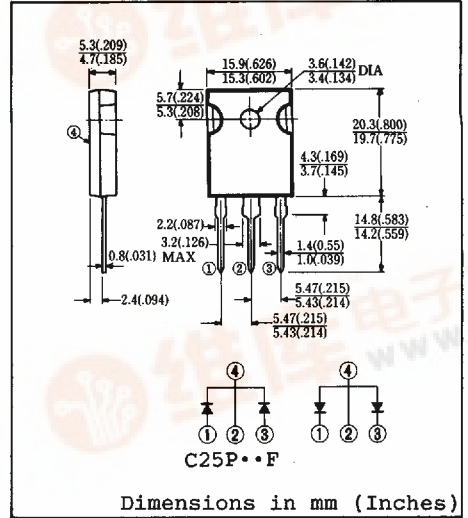

Dimensions in mm (Inches)

Approx. Net Weight: 5.55 Grams

MAXIMUM RATINGS

Voltage Rating	TYPE	◆C25P10F	C25P20F	Unit	
	Symbol	◆C25P10FR	C25P20FR		
Repetitive Peak Reverse Voltage	V_{RRM}	100	200	V	
Non-Repetitive Peak Reverse Voltage	V_{RSM}	110	220	V	
Electrical Rating	Symbol	Condition		Rating	Unit
Average Rectified Output Current	I_o	Full rectangular wave conduction $T_c = 84^\circ C$		27.7	A
		Full sinusoidal wave conduction $T_c = 93^\circ C$		25	
RMS Forward Current	$I_{F(RMS)}$			28	A
Peak One-cycle Forward Surge Current	I_{FSM}	50Hz full sine wave, non-repetitive		150	A
Operating Junction Temperature Range	T_{jw}			-40 to 150	$^\circ C$
Storage Temperature Range	T_{stg}			-40 to 150	$^\circ C$
Mounting Torque	F_{tor}	Recommended torque		0.5 (5.1)	N•m (kgf•cm)

ELECTRICAL & THERMAL CHARACTERISTICS

Characteristics	Symbol	Test Condition	Max.	Unit
Peak Forward Voltage	V_{FM}	$I_{FM} = 12.5A$ $T_j = 25^\circ C$ per diode leg	0.98	V
Peak Reverse Current	I_{RM}	$V_{RM} = V_{RRM}$ $T_j = 25^\circ C$ per diode leg	25	μA
Reverse Recovery Time	t_{rr}	$I_{FM} = 10A$ $-di/dt = 50A/\mu S$ $T_j = 35^\circ C$	50	ns
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	2	$^\circ C/W$

◆ For spare parts only

FIG.1-FORWARD VOLTAGE VS. FORWARD CURRENT

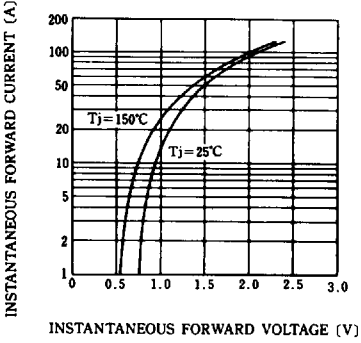


FIG.2-AVERAGE FORWARD DISSIPATION




FIG.3-AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

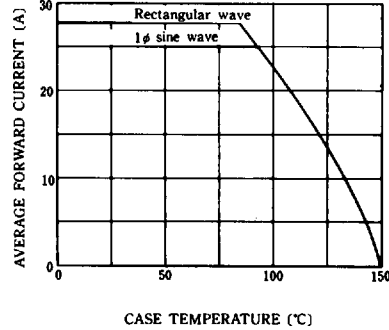


FIG.4-SURGE CURRENT RATINGS

