

S-22S12R/I

256-word × 4-bit parallel NON-VOLATILE RAM

The S-22S12R/I is a non-volatile CMOS RAM, composed of a CMOS static RAM and a non-volatile electrically erasable programmable memory (E²PROM) to backup the SRAM.


The organization is 256-word × 4-bit (total 1024 bits) and the RAM is asynchronously CMOS static. The pin layout is compatible with X2212 of Xicor Ltd.

When a store signal is input to the SRAM, all the data is copied into the E²PROM. When a recall signal is input, the E²PROM data is recopied into the SRAM.

■ Features

- Low current consumption
 Operating : 10 mA typ.
 Standby : 1 μA max.
- All inputs and outputs except $\overline{\text{STORE}}$ and $\overline{\text{RECALL}}$ are compatible with TTL
- +5-V single power supply (+ 5 V ± 10%)
- Completely static operation
- Access time: 200 ns max.
- CMOS floating gate process
- Tri-state output
- $\overline{\text{STORE}}$ and $\overline{\text{RECALL}}$ are controlled by a short pulse width: 200 ns min.
- E²PROM store cycles: 10⁴/10⁵ times
- E²PROM memory retention: 10 years
- Erroneous store protection: ≈ 3.5 V
- 18-pin DIP/SOP

■ Pin Arrangement

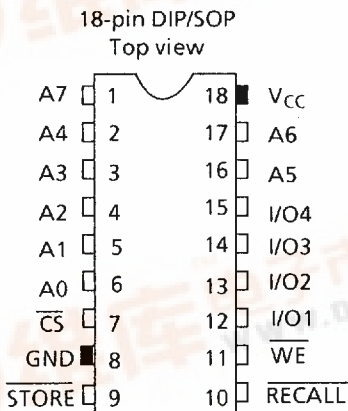

A0 to A7	Address input
I/O1 to I/O4	Data input/output
$\overline{\text{WE}}$	Write enable
$\overline{\text{CS}}$	Chip select
$\overline{\text{RECALL}}$	Recall
$\overline{\text{STORE}}$	Store
V _{CC}	Power supply voltage (+ 5 V)
GND	Ground (0 V)

Figure 1

S-22S12R/I

Block Diagram

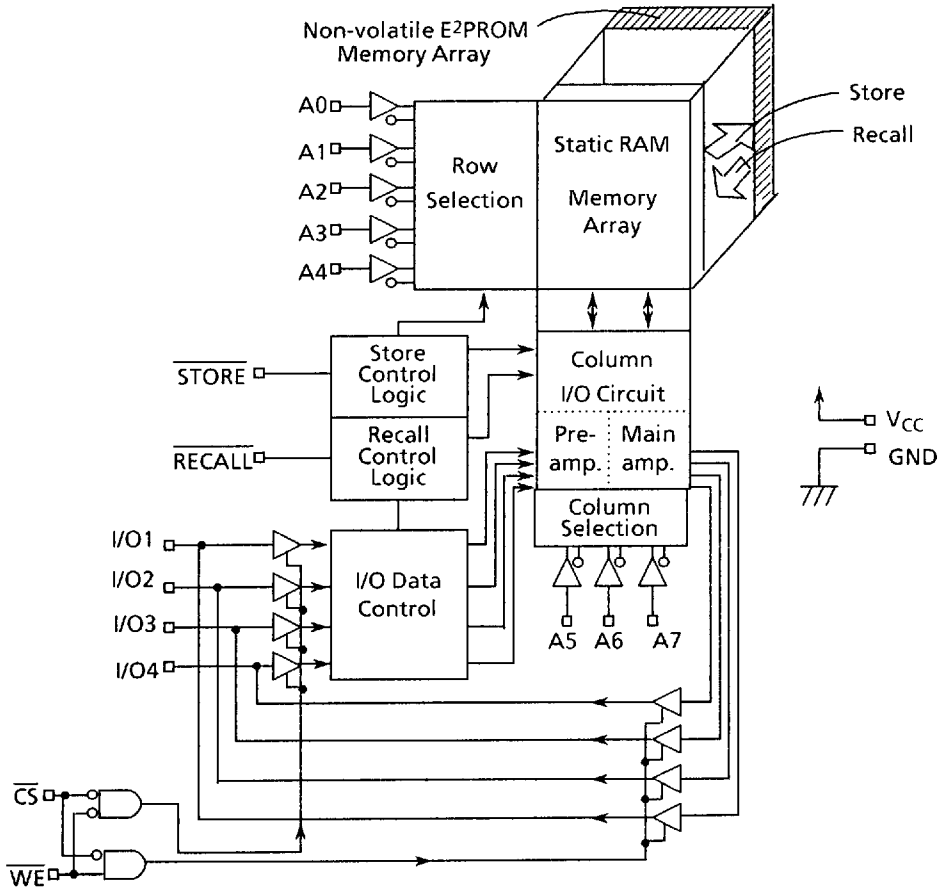


Figure 2

Absolute Maximum Ratings

Table 1

Item	Symbol	Condition	Ratings	Unit
Storage temperature	T _{stg}	S-22S12R	-65 to +125	°C
		S-22S12I	-65 to +150	°C
Storage temperature under bias	T _{bias}	S-22S12R	-10 to +85	°C
		S-22S12I	-50 to +95	°C
Power supply voltage	V _{CC}		-0.3 to +6.0	V
Input voltage	V _{IN}		-0.3 to V _{CC} + 0.3	V
Output voltage	V _{OUT}		0.0 to V _{CC}	V

■ Recommended Operating Conditions

Table 2

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Power supply voltage	V_{CC}		4.5	5.0	5.5	V
High level input voltage 1	V_{IH1}	\overline{CS} , \overline{WE} , I/O, A0 to A7	2.0	—	V_{CC}	V
High level input voltage 2	V_{IH2}	\overline{STORE} , \overline{RECALL}	3.4	—	V_{CC}	V
Low level input voltage 1	V_{IL1}	\overline{CS} , \overline{WE} , I/O, A0 to A7	0.0	—	0.8	V
Low level input voltage 2	V_{IL2}	\overline{STORE} , \overline{RECALL}	0.0	—	0.8	V
Operating temperature	T_{opr}	S-22S12R	0	—	+70	°C
		S-22S12I	-40	—	+85	°C

■ DC Electrical Characteristics

Table 3

(S-22S12R : $T_a = 0^\circ\text{C}$ to $+70^\circ\text{C}$, $V_{CC} = +5\text{V} \pm 10\%$
 S-22S12I : $T_a = -40^\circ\text{C}$ to $+85^\circ\text{C}$, $V_{CC} = +5\text{V} \pm 10\%$)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Operating current consumption	I_{CC}	S-22S12R	—	10	20	mA
		S-22S12I	—	10	30	mA
Standby current consumption	I_{SB}	$\overline{CS} = V_{CC}$ Other inputs are V_{CC} or GND	—	—	1	μA
Inputs leakage current	I_{LI}	$V_{IN} = \text{GND to } V_{CC}$	—	0.1	1	μA
Output leakage current	I_{LO}	$V_{OUT} = \text{GND to } V_{CC}$	—	0.1	1	μA
High level output voltage	V_{OH}	TTL $I_{OH} = -2 \text{ mA}$	2.4	—	—	V
		CMOS $I_{OH} = -100 \mu\text{A}$	$V_{CC}-0.1$	—	—	V
Low level output voltage	V_{OL}	TTL $I_{OL} = 4.2 \text{ mA}$	—	—	0.4	V
		CMOS $I_{OL} = 100 \mu\text{A}$	—	—	0.1	V
Store inhibition voltage	V_{WI}	S-22S12R	—	3.5	4.0	V
		S-22S12I	—	3.5	4.1	V
Schmitt width	V_{WD}	\overline{RECALL} , \overline{STORE}	0.4	—	—	V

S-22S12R/I

■ Data Hold Characteristics

Table 4

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Data hold voltage	V_{DH}	$\overline{CS} \geq V_{CC} - 0.2V, \overline{RECALL} \geq V_{CC} - 0.2V$	1.5	—	5.5	V
Data hold setup time	t_{CDH}		50	—	—	ns
Recovery time	t_R		300	—	—	ns

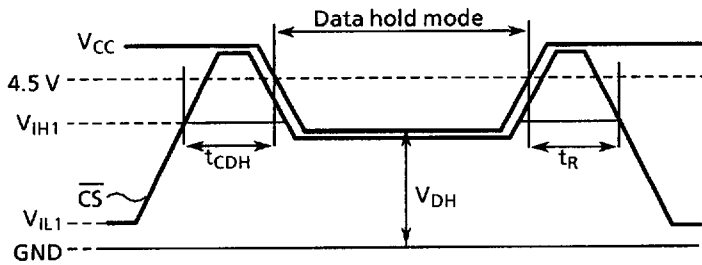


Figure 3

■ Capacitance

Table 5

($T_a = 25^\circ\text{C}, f = 1.0\text{ MHz}, V_{CC} = 5\text{ V}$)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Input capacitance	C_{IN}	$V_{IN} = 0\text{ V}$	—	—	6	pF
Output capacitance (I/O pin)	$C_{I/O}$	$V_{I/O} = 0\text{ V}$	—	—	10	pF

■ AC Electrical Characteristics

Table 6 Measurement conditions

Item	Conditions	S-22S12R	S-22S12I	Unit
Input pulse voltage	\overline{CS} , \overline{WE} , I/O, A0 to A7	0.65 to 2.2	0.0 to 3.0	V
	STORE, RECALL	0.0 to 4.0	0.0 to 4.0	V
Input pulse rise/fall time		10	10	ns
I/O reference voltage		1.5	1.5	V
Output load		1TTL + 100pF	1TTL + 100pF	

1. Read cycle

Table 7

Item	Symbol	Min.	Typ.	Max.	Unit
Read cycle time	t_{RC}	200	—	—	ns
Address access time	t_{AA}	—	—	200	ns
\overline{CS} access time	t_{CS}	—	—	200	ns
Output data hold time	t_{OH}	20	—	—	ns
Output enable time (\overline{CS})	t_{CLZ}	10	—	—	ns
Output disable time (\overline{CS})	t_{CHZ}	10	—	70	ns

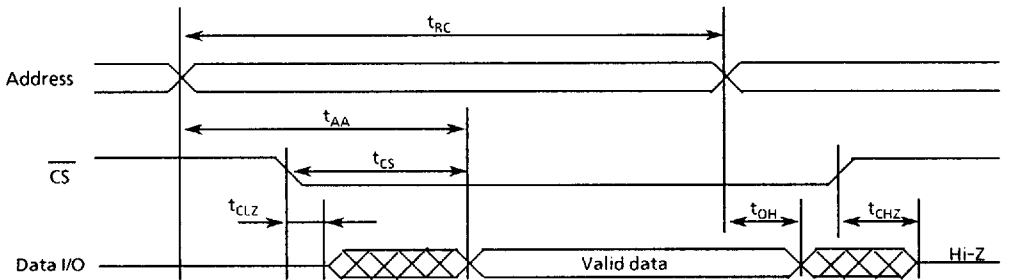


Figure 4

S-22S12R/I

2. Write cycle

Table 8

Item	Symbol	Min.	Typ.	Max.	Unit
Write cycle time	t_{WC}	200	—	—	ns
\overline{CS} pulse width	t_{CW}	120	—	—	ns
Address setup time	t_{AS}	20	—	—	ns
\overline{WE} pulse width	t_{WP}	120	—	—	ns
Write reset time	t_{WR}	25	—	—	ns
Input data setup time	t_{DW}	50	—	—	ns
Input data hold time	t_{DH}	20	—	—	ns
Output disable time (\overline{WE})	t_{WHZ}	10	—	70	ns
Output enable time (\overline{WE})	t_{WLZ}	10	—	—	ns

· Write cycle 1 : \overline{WE} control

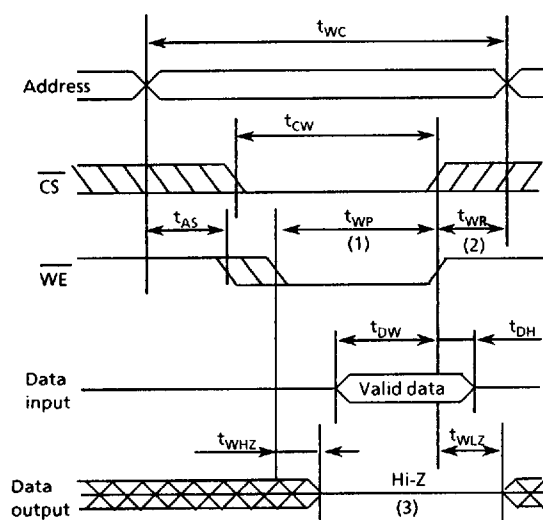


Figure 5

· Write cycle 2 : \overline{CS} control

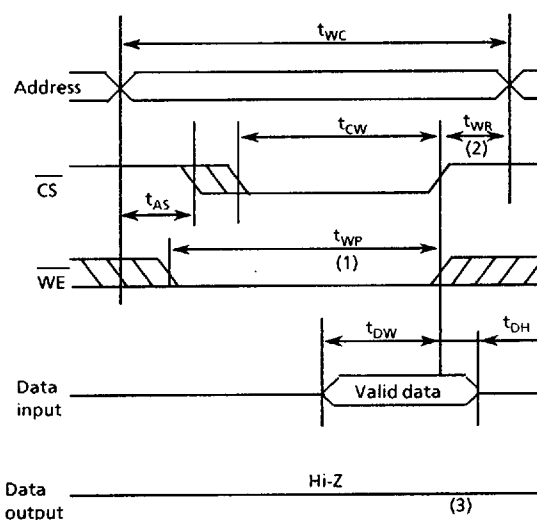


Figure 6

- (1) The write cycle starts when both \overline{CS} and \overline{WE} are low.
- (2) t_{WR} is the period of time from the rise of \overline{CS} or \overline{WE} whichever is the first to the end of write cycle.
- (3) Output remains in high-impedance state when \overline{CS} falls simultaneously with or after the fall of \overline{WE} .

3. Store cycle

Table 9

Item	Symbol	Min.	Typ.	Max.	Unit
Store time	t_{ST}	—	—	10	ms
Store pulse width	t_{STP}	200	—	—	ns
Store disable time	t_{STZ}	—	—	100	ns
Store enable time	t_{OST}	10	—	—	ns

Store operation starts at the falling of \overline{STORE} .

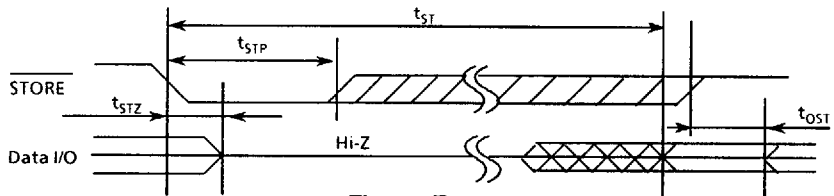


Figure 7

4. Recall cycle

Table 10

Item	Symbol	Min.	Typ.	Max.	Unit
Recall cycle time	t_{RCC}	1300	1000	—	ns
Recall pulse width	t_{RCP}	200	—	—	ns
Recall disable time	t_{RCZ}	—	—	100	ns
Recall enable time	t_{ORC}	10	—	—	ns
Recall data access time	t_{ARC}	—	—	1100	ns

Recall operation starts at the rise of \overline{RECALL} .
It can be repeated without limitation.

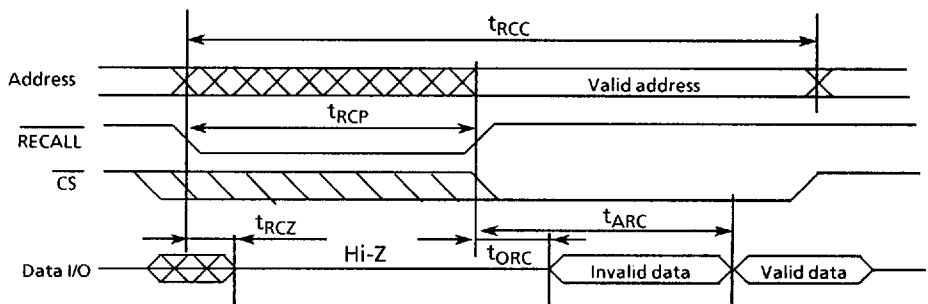


Figure 8

S-22S12R/I

■ Operation Mode

Table 11

Mode	Input				Input/Output
	$\overline{\text{CS}}$	$\overline{\text{WE}}$	$\overline{\text{RECALL}}$	$\overline{\text{STORE}}$	
Standby mode	H	X	H	H	Output is high impedance
Read mode	L	H	H	H	Output data
Write mode	L	L	H	H	Input data
Recall mode	X	H	L	H	Output is high impedance
	H	X	L	H	
Store mode	X	H	H	L	Output is high impedance
	H	X	H	L	

X : don't care

- Notes:
- When $\overline{\text{RECALL}}$ and $\overline{\text{STORE}}$ are simultaneously input, $\overline{\text{RECALL}}$ is valid.
 - When $\overline{\text{RECALL}}$ is low, $\overline{\text{STORE}}$ cannot be received.
 - When power supply voltage (V_{CC}) is below store inhibition voltage V_{WI} , the store operation is inhibited.

■ Operation

1. Standby mode

When $\overline{\text{CS}}$ goes high, the S-22S12R/I enters into the standby mode: power consumption becomes lowest, and I/O1 to I/O4 are high impedance.

2. SRAM modes

2.1 Read mode

When $\overline{\text{CS}}$ is low and $\overline{\text{WE}}$ is high, the S-22S12R/I enters into the read mode: the SRAM data is output to I/O1 to I/O4.

2.2 Write mode

When $\overline{\text{CS}}$ and $\overline{\text{WE}}$ are low, the S-22S12R/I enters into the write mode: the data input in I/O1 to I/O4 is written to the SRAM.

3. SRAM↔E²PROM mode

3.1 Store mode

When $\overline{\text{STORE}}$ goes V_{IL2} , the S-22S12R/I enters into the store mode: the SRAM data is copied to the E²PROM. The original data in the SRAM is effective. Since the copied data in the E²PROM is non-volatile, they are retained even if power turns off. When $\overline{\text{STORE}}$ falls, the store operation starts and finishes automatically. When store operation starts, I/O1 to I/O4 go to high impedance and other operations are inhibited until store operation is finished and $\overline{\text{STORE}}$ goes to high. During store operation, the CPU can access other instructions.

The store operation is inhibited if power supply voltage (V_{CC}) is under V_{W1} (≈ 3.5 V.)

The following two methods prevent erroneous store, caused by noise when power turns on or off:

- $\overline{\text{RECALL}}$ goes V_{IL2} when power turns on or off (see Figure 9).
- $\overline{\text{STORE}}$ connects to V_{CC} with pull-up resistor.

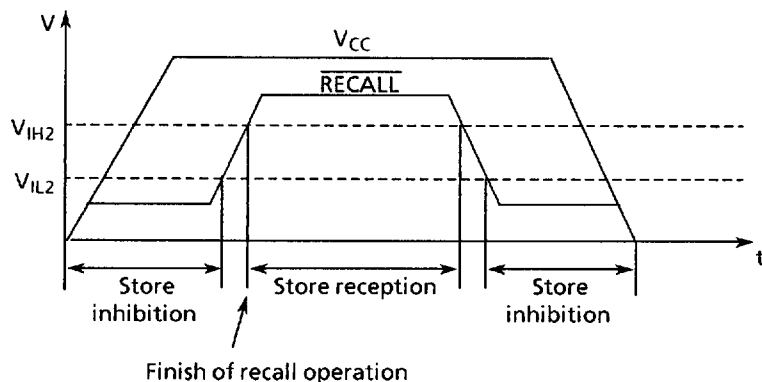


Figure 9 STORE inhibition period and reception period at power ON and OFF


3.2 Recall mode

When $\overline{\text{RECALL}}$ goes V_{IL2} , the S-22S12R/I enters into the recall mode: the data copied into the E²PROM is recopied to the SRAM. The recopied data can be read or written as SRAM data. Even if the data is copied repeatedly, the data in the E²PROM does not change. Other operations are inhibited during its operation.

S-22S12R/I

■ Dimensions

1. S-22S12R/I (18-pin DIP)

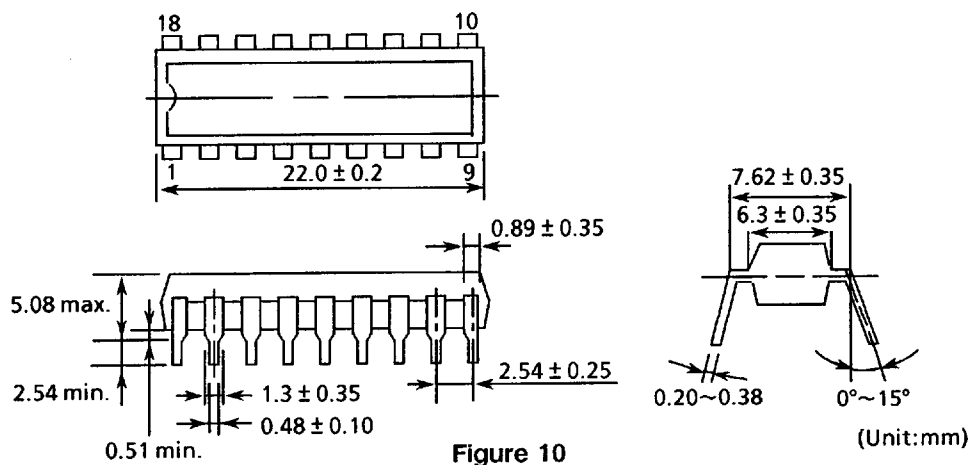

2. S-22S12RF/IF (18-pin SOP)

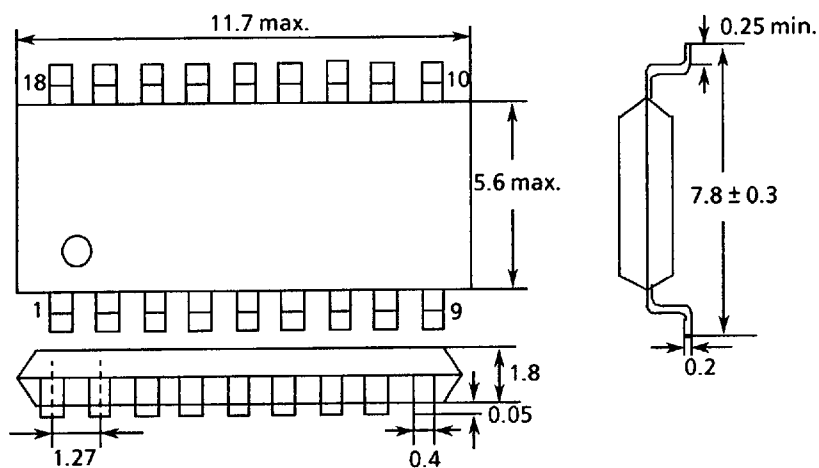


Figure 11


■ Ordering Information

Table 12

Product name	Store cycles	Store cycles per bit	Temperature	Package
S-22S12R 01/10	10 ⁴ /10 ⁵	10 ⁴ /10 ⁵	0°C to +70°C	Plastic DIP
S-22S12I 01/10	10 ⁴ /10 ⁵	10 ⁴ /10 ⁵	-40°C to +85°C	Plastic DIP
S-22S12RF 01/10	10 ⁴ /10 ⁵	10 ⁴ /10 ⁵	0°C to +70°C	Plastic SOP
S-22S12IF 01/10	10 ⁴ /10 ⁵	10 ⁴ /10 ⁵	-40°C to +85°C	Plastic SOP

■ Markings

1. S-22S12R/I (18-pin DIP)

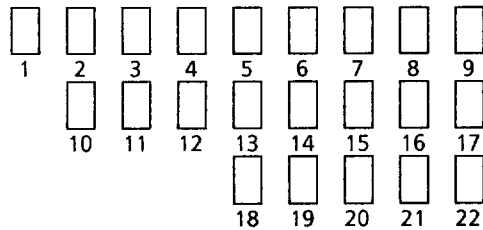

1 to 9 : Product name

10 : Assembly code


11 : Year of manufacturing (last digit)

12 : Month of manufacturing : January = 1, February = 2,
March = 3, April = 4, May = 5, June = 6, July = 7, August = 8,
September = 9, October = X, November = Y, December = Z

13 to 17 : Lot No.

18 to 22 : 『 JAPAN 』

2. S-22S12RF/IF (18-pin SOP)

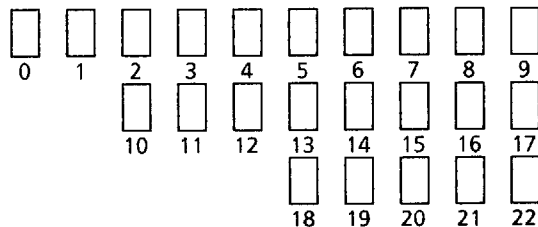

0 to 9 : Product name

10 : Assembly code

11 : Year of manufacturing (last digit)

12 : Month of manufacturing : January = 1, February = 2,
March = 3, April = 4, May = 5, June = 6, July = 7, August = 8,
September = 9, October = X, November = Y, December = Z

13 to 17 : Lot No.


18 to 22 : 『 JAPAN 』

S-22S12R/I


■ Characteristics

1. DC characteristics


1.1 Operating current consumption I_{CC}
— Power supply voltage V_{CC}

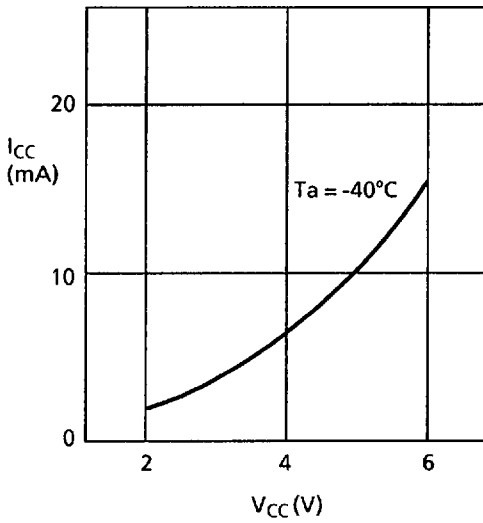


1.2 Operating current consumption I_{CC}
— Ambient temperature T_a

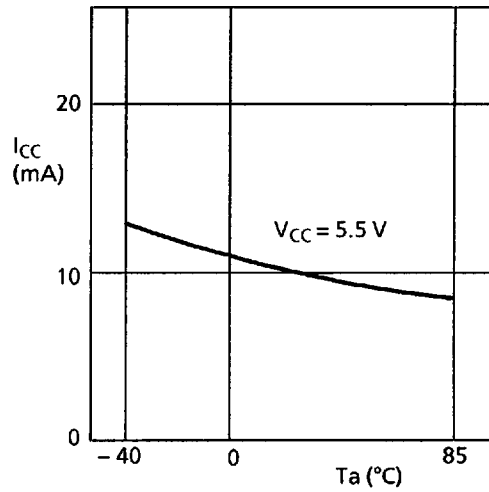


1.3 Operating current consumption I_{CC}
— Reading frequency

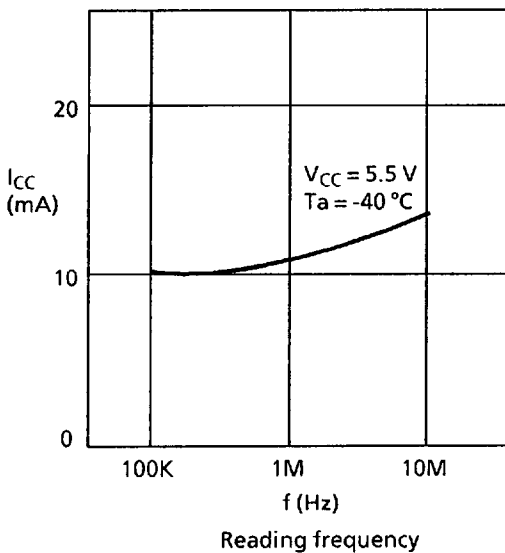


1.4 Standby current consumption I_{SB}
— Ambient temperature T_a

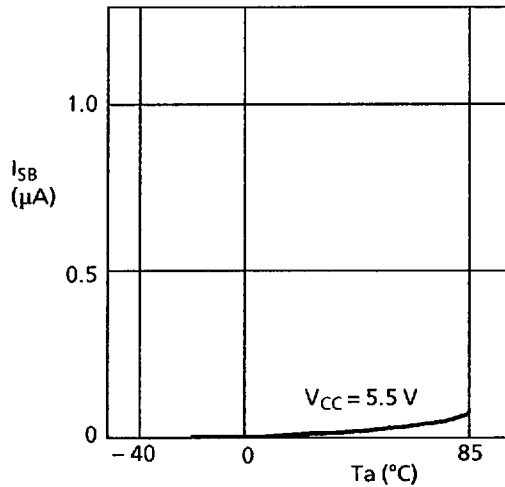


1.5 High level input voltage V_{IH1} — Ambient temperature T_a

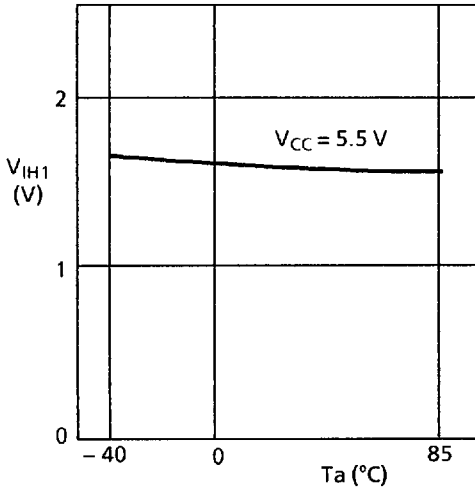


1.6 Low level input voltage V_{IL1} — Ambient temperature T_a

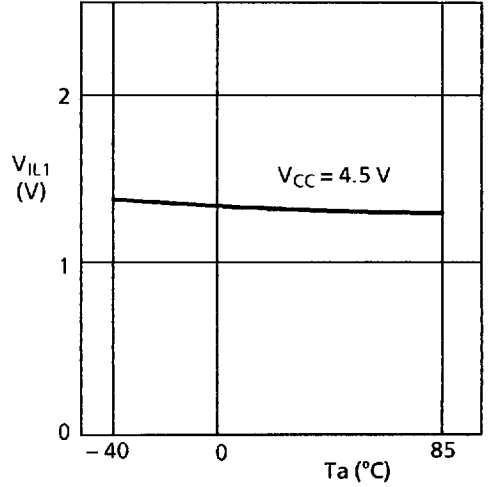

1.7 High level input voltage V_{IH2} — Ambient temperature T_a

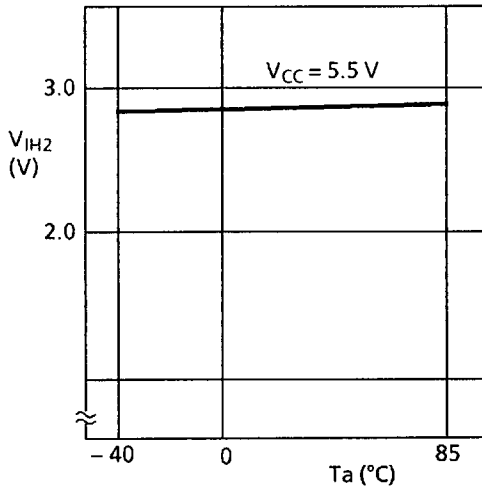


1.8 Low level input voltage V_{IL2} — Ambient temperature T_a

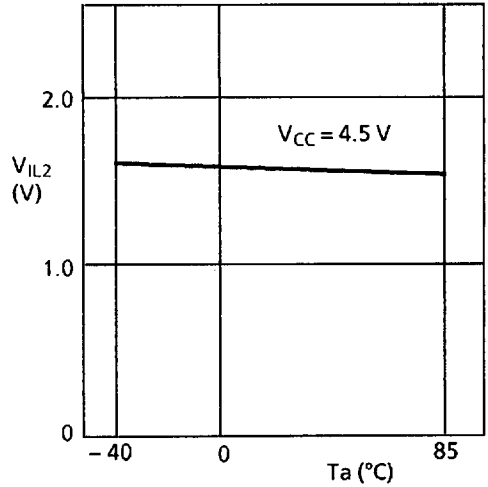


S-22S12R/I

2. AC Characteristics


2.1 Address access time t_{AA} —
Ambient temperature T_a

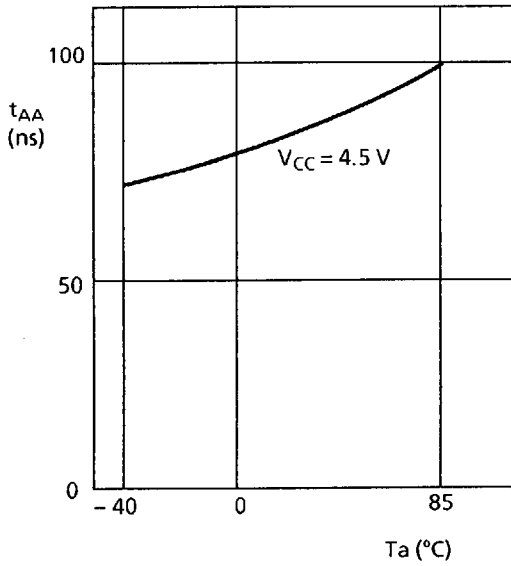


2.2 \overline{CS} pulse width t_{CW} —
Ambient temperature T_a

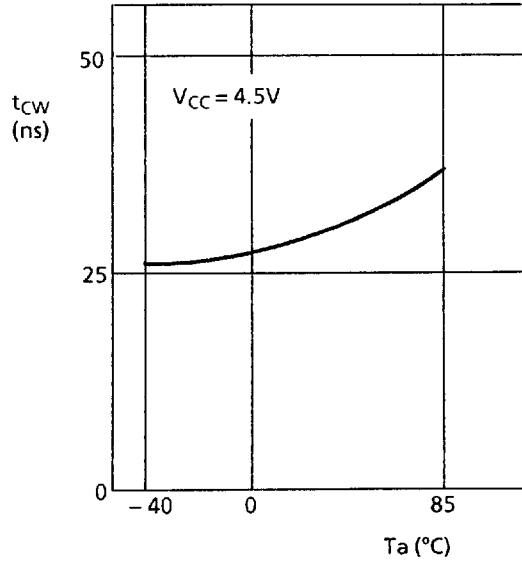


2.3 \overline{WE} pulse width t_{WP} —
Ambient temperature T_a

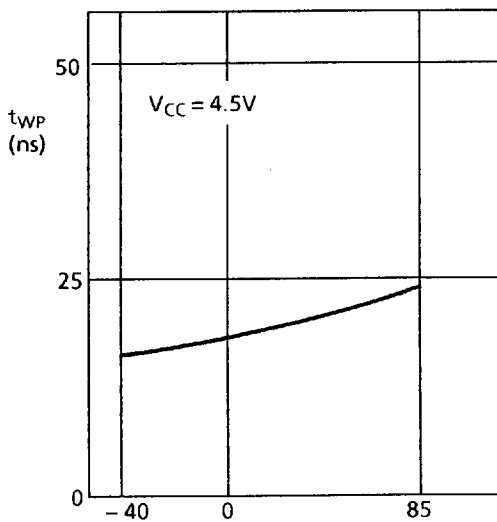


2.4 Input data setup time t_{DW} —
Ambient temperature T_a

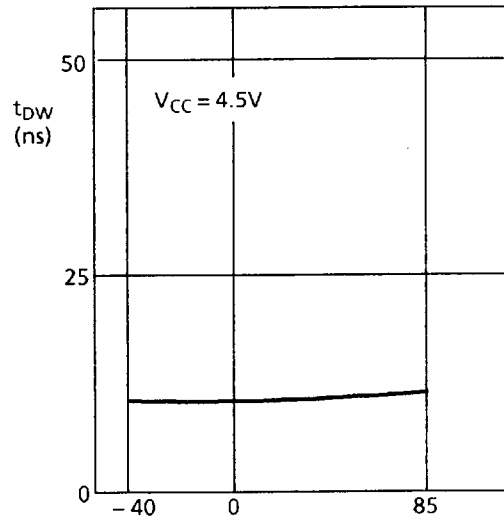

2.5 Store time t_{ST} — Ambient temperature T_a

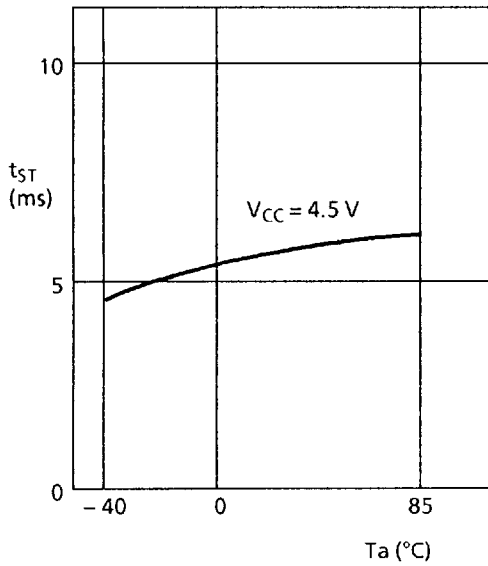

2.6 Recall cycle time t_{RCC} — Ambient temperature T_a

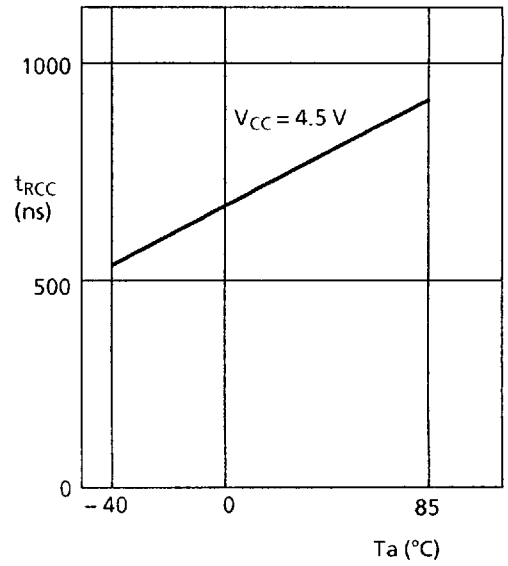

3. Store Characteristic

