

IS437/IS438 Built-in Amp. Type Opic Light Detector


Features

1. Built-in Schmidt trigger circuit
2. High sensitivity (E_v : MAX. 35 lx at $T_a=25^\circ\text{C}$)
3. LSTTL and TTL compatible output.
4. Open collector output
5. Low level output at light incident light (IS437)
High level output at incident light (IS438)

Applications

1. Floppy disk drives
2. Copiers, printers, facsimiles
3. VCRs, cassette tape recorder
4. Automatic vending machines

Outline Dimensions (Unit : mm)

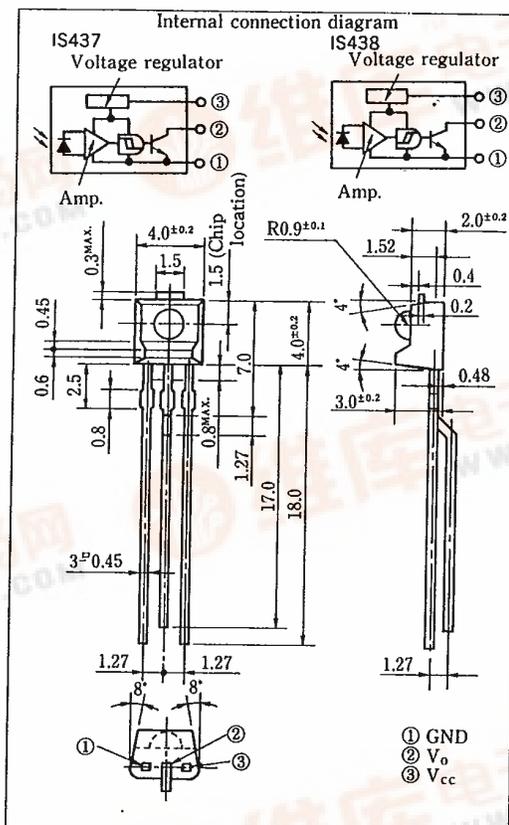

*OPIC is a registered trademark of Sharp and stands for Optical IC. It has a light detecting element and signal processing circuitry integrated onto a single chip.

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V_{cc}	-0.5 ~ +35	V
Output voltage	V_o	-0.5 ~ +40	V
Output current	I_o	50	mA
Power dissipation	P	250	mW
Operating temperature	T_{opr}	-25 ~ +85	°C
Storage temperature	T_{stg}	-40 ~ +100	°C
*1 Soldering temperature	T_{sol}	260	°C

*1 For 5 seconds at the position of 2.5mm from the bottom face of resin package.

SHARP

Electro-optical Characteristics

(Unless otherwise specified, Ta=0~70°C, Vcc=5V)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit										
Operating supply voltage	V _{CC}	Ta=25°C	4.5	—	35	V										
Low level output voltage	V _{OL}	I _{OL} =16mA*2	—	0.15	0.4	V										
Low level output current	I _{OH}	V _{CC} =20V, V _O =30V*3	—	—	100	μA										
Low level supply current	I _{CCL}	*2	—	2.0	4.5	mA										
High level supply current	I _{CCH}	*3	—	1.0	3.0	mA										
**"High"→"Low" threshold illuminance	IS437	E _{VHL}	Ta=25°C, R _L =280Ω	—	15	35	lx									
			R _L =280Ω	—	—	50										
	IS438	Ta=25°C, R _L =280Ω	1.5	10	—											
		R _L =280Ω	1	—	—											
***"Low"→"High" threshold illuminance	IS437	E _{VLH}	Ta=25°C, R _L =280Ω	1.5	10	—	lx									
			R _L =280Ω	1	—	—										
	IS438	Ta=25°C, R _L =280Ω	—	15	35											
		R _L =280Ω	—	—	50											
**Hysteresis	IS437	E _{VLH} /E _{VHL}	Ta=25°C, R _L =280Ω	0.50	0.65	0.90	—									
	IS438	E _{VHL} /E _{VLH}														
Response time	"Low"→"High" propagation time	IS437	Ta=25°C E _V =50 lx R _L =280Ω	—	5	15	μs									
		IS438						—	3	9						
	"High"→"Low" propagation time	IS437						—			3	9				
		IS438						—					5	15		
	Rise time	t _r						—							0.1	0.5
	Fall time	t _f						—								



- *2 Defines E_V=50 lx (IS437) and E_V=0 (IS438).
- *3 Defines E_V=0 (IS437) and E_V=50 lx (IS438).
- *4 E_{VHL} represents illuminance by CIE standard light source A (tungsten lamp) when output changes from high to low.
- *5 E_{VLH} represents illuminance by CIE standard light source A (tungsten lamp) when output changes from low to high.
- *6 Hysteresis stands for E_{VLH}/E_{VHL} (IS437) and E_{VHL}/E_{VLH} (IS438).

Recommended Operating Conditions

Parameter	Symbol	MIN.	MAX.	Unit
Supply voltage	V _{CC}	4.5	20	V
Output voltage	V _O	0	30	V
Output current	I _O	—	16	mA

Fig. 1 Power Dissipation vs. Ambient Temperature


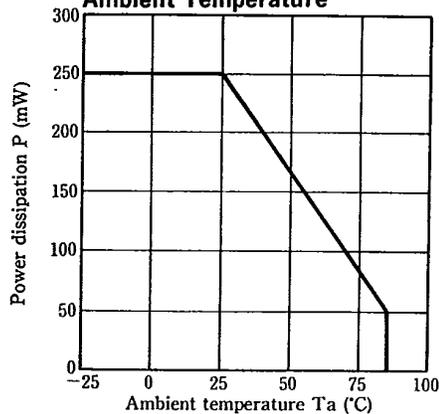


Fig. 2 Relative Threshold Illuminance vs. Supply Voltage

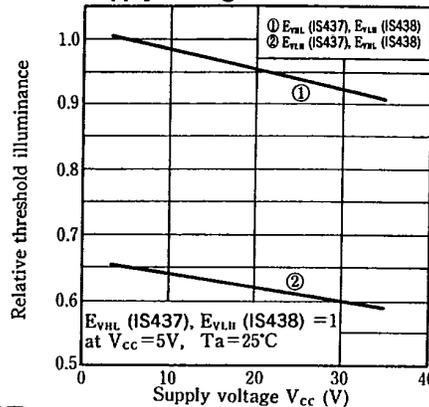

T-41-69

Fig. 3 Low Level Output Voltage vs. Low Level Output Current

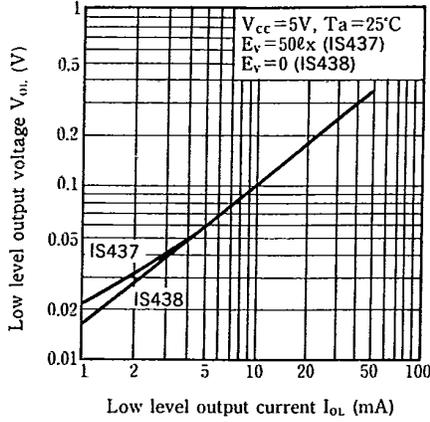


Fig. 4 Low Level Output Voltage vs. Ambient Temperature

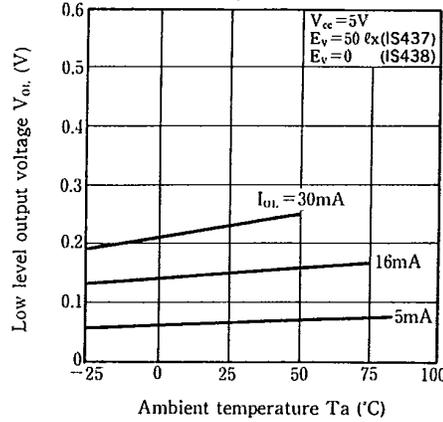


Fig. 5 Supply Current vs. Ambient Temperature

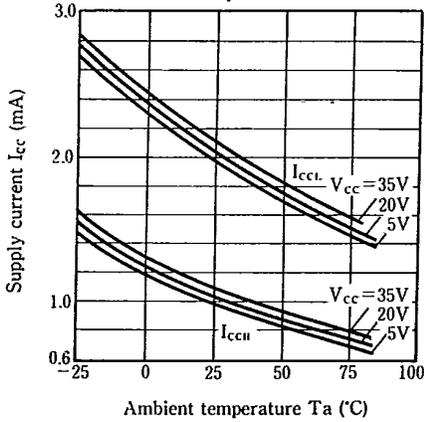


Fig. 6 Propagation Time vs. Illuminance



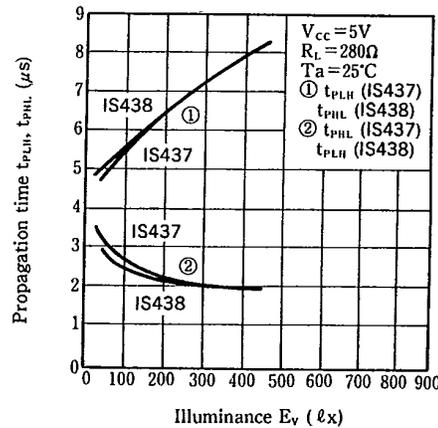


Fig. 7 Rise Time, Fall Time vs. Load Resistance

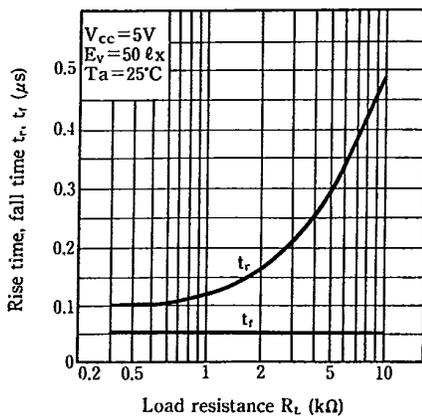

Test Circuit for Response Time (IS437)

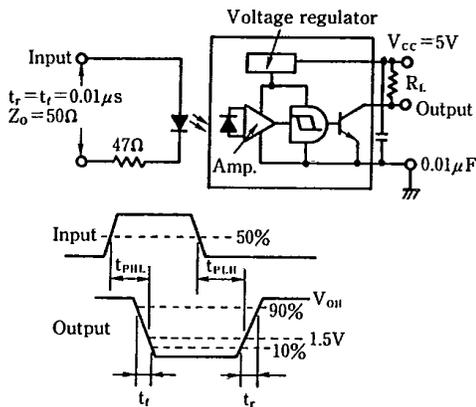

Test Circuit for Resesponse Time (IS438)

T-41-69

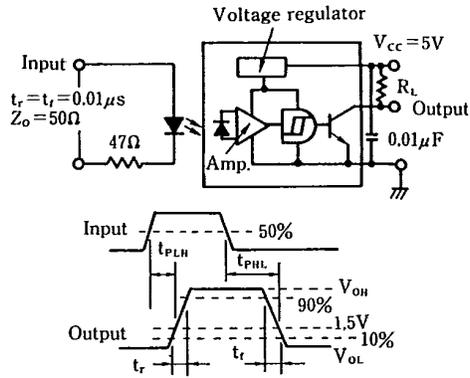


Fig. 8 Sensivity Diagram (Ta=25°C)


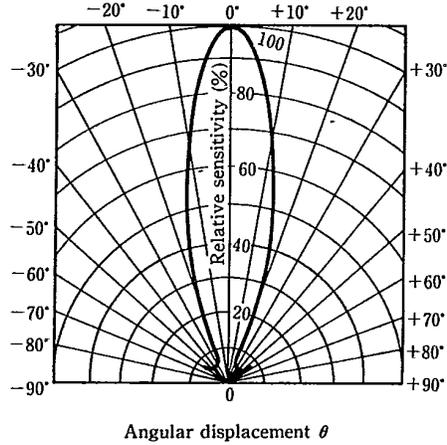


Fig. 9 Spectral Sensitivity

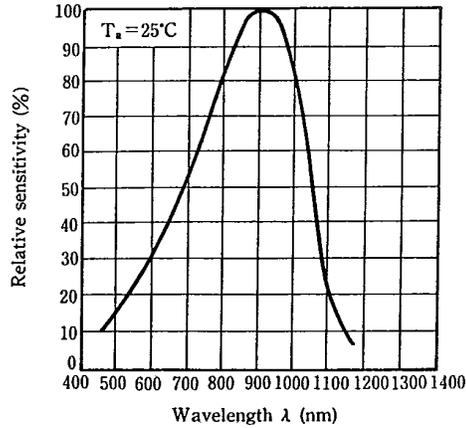

4