



VOLTAGE COMPARATOR


■ GENERAL DESCRIPTION

The NJM319 is precision high speed dual comparator fabricated on a single monolithic chip. It is designed to operate over a wide range of supply voltages down to single 5V logic and ground. The uncommitted collector of the output stage makes the NJM319 compatible with RTL, DTL and TTL as well as capable of driving lamps and relays at currents up to 25mA.


■ FEATURES

- Operating Voltage (+5V ~ +36V)
- Single Supply Operation
- Response Time (80ns typ.)
- Output Current (25mA @ Sink Current)
- Package Outline DIP14, DMP14, SSOP14
- Bipolar Technology

■ PACKAGE OUTLINE



NJM319D




NJM319M



NJM319V

■ PIN CONFIGURATION




NJM319D
NJM319M
NJM319V

PIN FUNCTION

1. NC
2. NC
3. (2) A GND
4. (3) A +INPUT
5. (4) A -INPUT
6. (5) V⁻
7. (6) B OUTPUT
8. (7) B GND
9. (8) B +INPUT
10. (9) B -INPUT
11. (10) V⁺
12. (1) A OUTPUT
13. NC
14. NC

■ EQUIVALENT CIRCUIT (1/2 Shown)

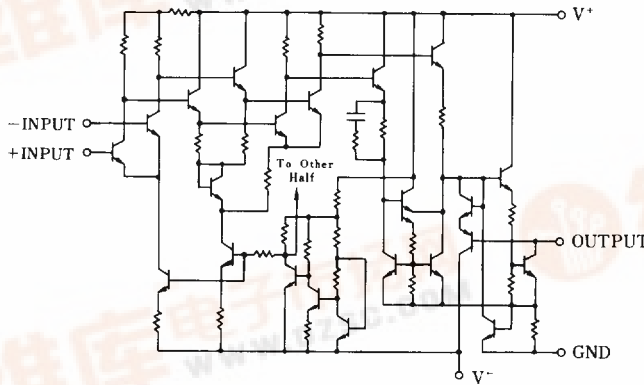



■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺ /V ⁻	36	V
Input Voltage	V _I	±15 (note 1)	V
Differential Input Voltage	V _{ID}	±5 (note 2)	V
Power Dissipation	P _D	(DIP14) 500	mW
		(DMP14) 300	mW
		(SSOP14) 300	mW
Output to Negative Supply Voltage	ΔV _{O-N}	36	V
GND to Negative Supply Voltage	ΔV _{G-N}	25	V
GND to Positive Supply Voltage	ΔV _{G-P}	18	V
Operating Temperature Range	T _{opr}	-20 ~ +75	°C
Storage Temperature Range	T _{stg}	-40 ~ +125	°C

(note 1) For supply voltage less than ±15V, the absolute maximum input voltage is equal to the supply voltage.

(note 2) Do not apply voltage more than 5V at the point between + INPUT and - INPUT.

■ ELECTRICAL CHARACTERISTICS


(Ta=25°C, V⁺/V⁻=±15V)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V _{IO}	R _S ≤ 5KΩ	—	2.0	8.0	mV
Input Offset Current	I _{IO}		—	80	200	nA
Input Bias Current	I _B		—	250	1000	nA
Voltage Gain	A _V		78	92	—	dB
Response Time	t _R	V _{IN} : 100mV Step Input 5mV Over Drive	—	80	—	ns
Saturation Voltage	V _{SAT}	V _{IN} ≤ -10mV, I _{SINK} = 25mA	—	0.75	1.5	V
Output Leakage Current	I _{LEAK}	V _{IN} ≥ 10mV, V ⁻ = GND = 0V, V _{OUT} = 35V	—	0.2	10	μA
Positive Supply Current	I ⁺ 1	V ⁺ = 5V, V ⁻ = 0V	—	4.3	—	mA
Positive Supply Current	I ⁺ 2		—	8	12.5	mA
Negative Supply Current	I ⁻		—	3	5	mA




■ TYPICAL CHARACTERISTICS


Input Bias Current vs. Temperature
($V^+/V^- = \pm 15V$)

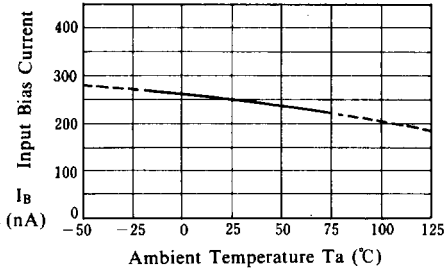


Input Offset Voltage vs. Temperature
($V^+/V^- = \pm 15V$)

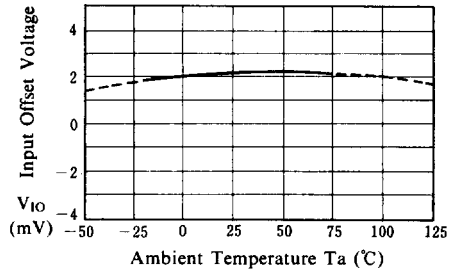


Operating Current vs. Operating Voltage

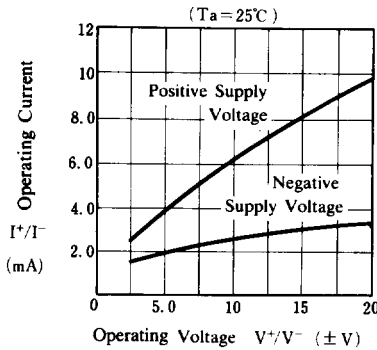


Transfer Function

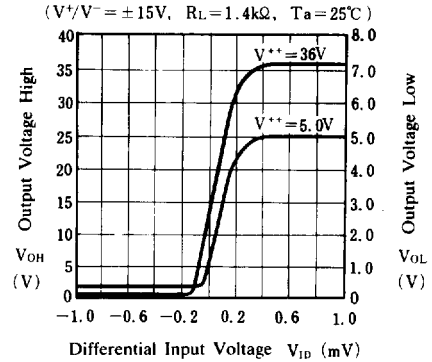

Response Time for Various Input Overdrives

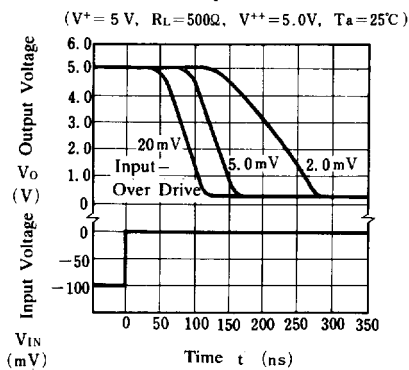


Response Time for Various Input Overdrives

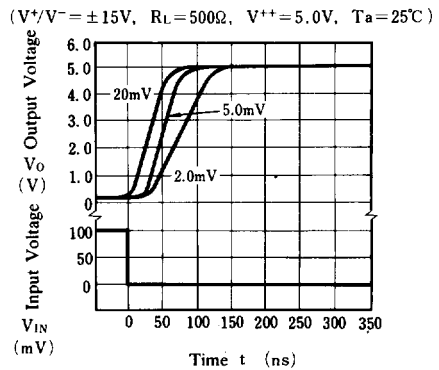




■ TYPICAL CHARACTERISTICS

Response Time for Various Input Overdrives

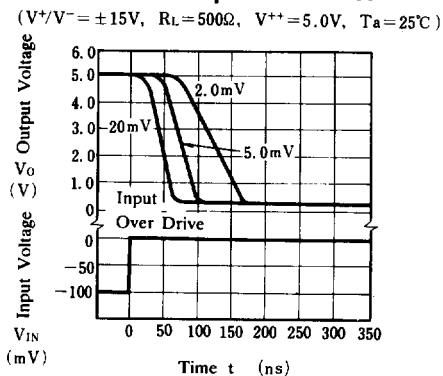


Response Time for Various Input Overdrives

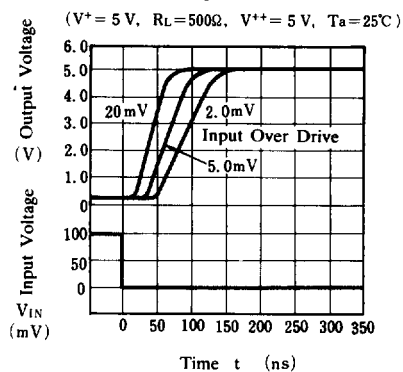

■ TYPICAL APPLICATIONS

Relay Driver



Window Detector

