




140 Commerce Drive
Montgomeryville, PA 18936-1013
Tel: (215) 631-9840

SD1402

RF & MICROWAVE TRANSISTORS 860-960MHz CLASS C, MOBILE APPLICATION

- CLASS C TRANSISTOR
- FREQUENCY 870MHz
- VOLTAGE 12.5V
- POWER OUT 0.3W
- POWER GAIN 8.0dB
- COMMON BASE




XO 72SL (M107)
epoxy sealed

ORDER CODE
SD1402

BRANDING
SD1402

PIN CONNECTION



S88SD1402-01

1 collector
2 emitter

3 base
4 base

DESCRIPTION

The SD1402 transistor is a silicon epitaxial planar transistor, wired common base, that was specifically designed for low level amplifier and multiplier use in 800MHz mobile and portable equipment. It achieves infinite VSWR at rated operating conditions.

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$)

Symbol	Parameter	Value	Unit
V_{CEO}	Collector - Emitter Voltage	36.0	V
V_{CES}	Collector - Emitter Voltage	18.0	V
V_{EBO}	Emitter - Base Voltage	4.0	V
I_C	Collector Current	0.3	A
P_{tot}	Total Power Dissipation	3.0	W
T_{stg}	Storage Temperature	- 65 to 150	$^{\circ}C$
T_j	Junction Temperature	200	$^{\circ}C$

THERMAL DATA

$R_{th(j-c)}$	Junction-case Thermal Resistance	58.3	$^{\circ}C/W$
---------------	----------------------------------	------	---------------

February 1989

1/3

357

SD1402**ELECTRICAL CHARACTERISTICS** ($T_{\text{case}} = 25^{\circ}\text{C}$)**STATIC**

Symbol	Test Conditions		Value			Unit
			Min.	Typ.	Max.	
BV_{CES}	$I_{\text{C}} = 10.0\text{mA}$	$V_{\text{BE}} = 0$	36.0			V
BV_{CEO}	$I_{\text{E}} = 10.0\text{mA}$	$I_{\text{B}} = 0$	18.0			V
BV_{EBO}	$I_{\text{E}} = 5.0\text{mA}$	$I_{\text{C}} = 0$	4.0			V
I_{CBO}	$V_{\text{CB}} = 12.5\text{V}$	$I_{\text{E}} = 0$			1.0	mA
h_{FE}	$V_{\text{CE}} = 5.0\text{V}$	$I_{\text{C}} = 150\text{mA}$	20.0			

DYNAMIC

Symbol	Test Conditions		Value			Unit
			Min.	Typ.	Max.	
P_{O}	$f = 870\text{MHz}$	$V_{\text{CC}} = 12.5\text{V}$	0.3			W
G_{P}	$f = 870\text{MHz}$	$V_{\text{CC}} = 12.5\text{V}$	8			dB
η_{C}	$f = 870\text{MHz}$	$V_{\text{CC}} = 12.5\text{V}$		60		%
C_{OB}	$f = 1\text{MHz}$	$V_{\text{CB}} = 12.5\text{V}$			4.0	pF

IMPEDANCE DATA (typical)

$$Z_{\text{s}} = 29.0 + j 0.9 \text{ ohms}$$

$$Z_{\text{cl}} = 9.9 + j 45.0 \text{ ohms}$$


$$F = 870\text{MHz}$$

$$V_{\text{CE}} = 12.5\text{V}$$

$$P_{\text{O}} = 0.3\text{W}$$

PACKAGE MECHANICAL DATA

X0 72SL

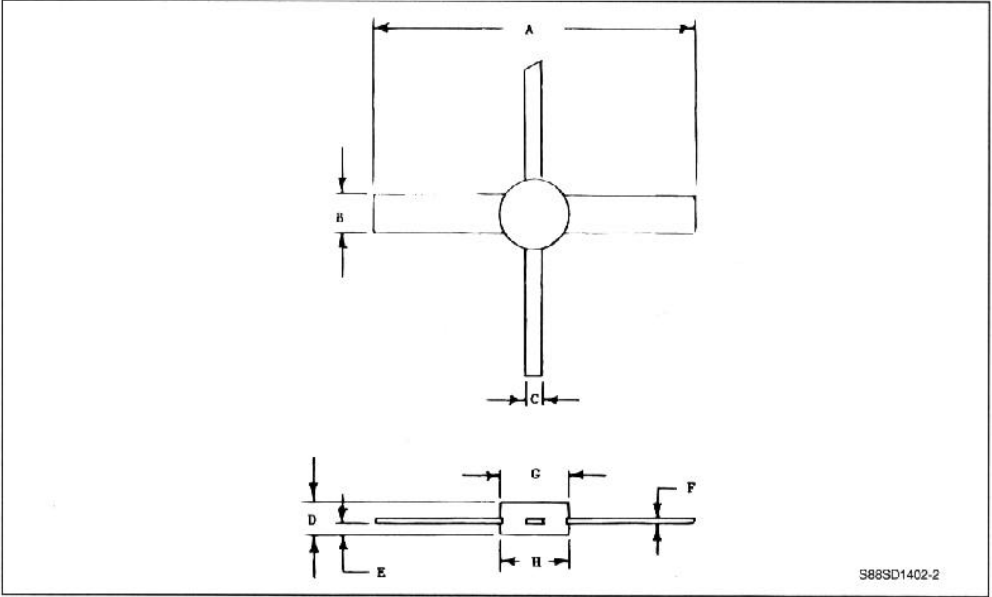

	Minimum Inches	Maximum Inches
A	.890	
B	.120	.130
C	.027	.033
D		.135
E	.40	.050
F	.003	.007
G	.201	.207
H	.201	.207