Film Capacitors

Metallized Polypropylene Film Capacitors (MKP)

Series/Type: **B32656C**
Date: August 2004

© EPCOS AG 2004. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.
Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

Permissible AC voltage V_{rms} versus frequency f (for sinusoidal waveforms, $T_A \leq 90$ °C)
For T_A >90 °C, please refer to "General technical information", section 3.2.3.

850 VDC/450 VAC

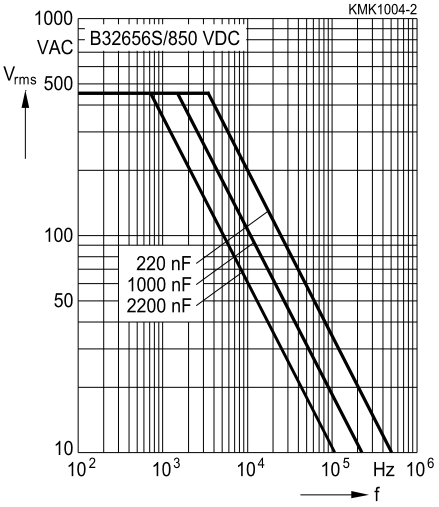

1000 VDC/480 VAC

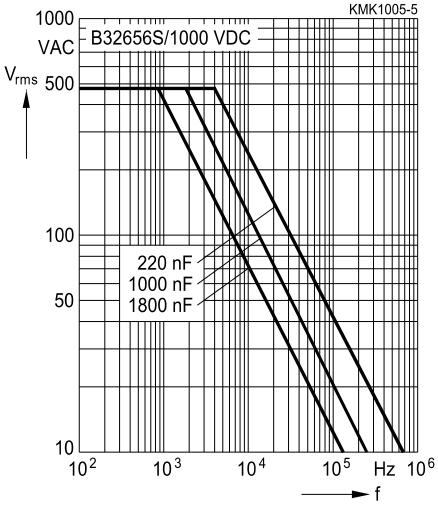

1250 VDC/500 VAC

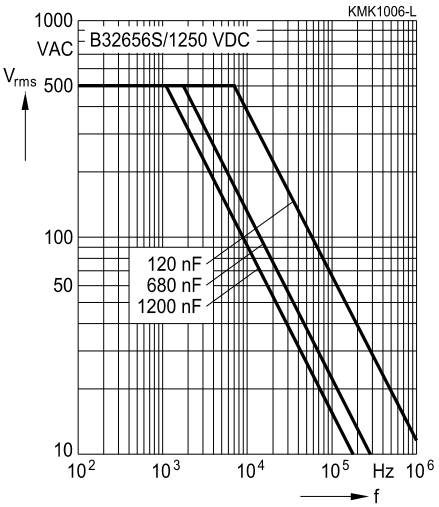

1600 VDC/750 VAC

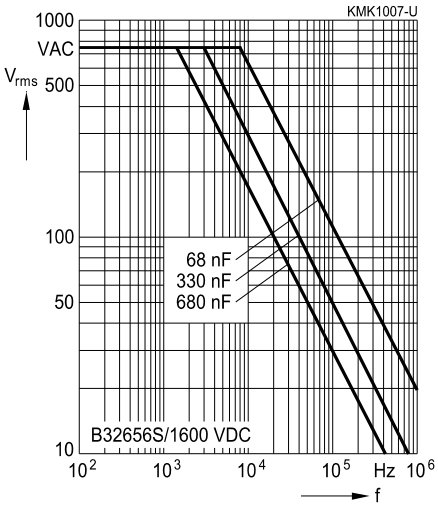

Permissible AC voltage V_{rms} versus frequency f (for sinusoidal waveforms, $T_A \leq 90$ °C)
For T_A >90 °C, please refer to "General technical information", section 3.2.3.
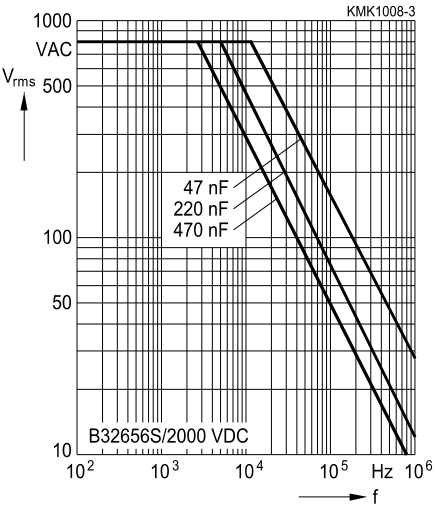
2000 VDC/800 VAC