



B140HW


1.0A SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Features

- Guard Ring Die Construction for Transient Protection
- Very Low Leakage Current
- Low Forward Voltage Drop
- Lead Free By Design/RoHS Compliant (Note 3)**
- "Green Device" (Note 4)**

Mechanical Data

- Case: SOD-123
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish — Matte Tin Finish annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Marking: Date Code & Type Code, See Page 3
- Type Code: LO
- Ordering Information: See Page 3
- Weight: 0.01 grams (approximate)

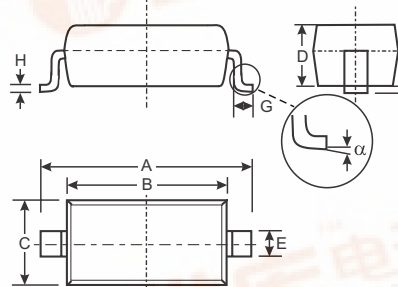

SOD-123		
Dim	Min	Max
A	3.55	3.85
B	2.55	2.85
C	1.40	1.70
D	—	1.35
E	0.45	0.65
	0.55 Typical	
G	0.25	—
H	0.11 Typical	
J	—	0.10
α	0°	8°
All Dimensions in mm		

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	40	V
RMS Reverse Voltage	$V_{R(RMS)}$	28	V
Average Forward Current (See Figure 1)	$I_{F(AV)}$	1.0	A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	6.6	A
Repetitive Peak Reverse Current $t_p = 2\mu\text{s}$ square wave, $f = 1\text{KHz}$	I_{RRM}	0.5	A
Non-Repetitive Peak Reverse Current $t_p = 100\mu\text{s}$ square wave	I_{RSM}	1.0	A
Power Dissipation (Note 2) (Note 5)	P_d	350 410	mW
Typical Thermal Resistance Junction to Ambient (Note 2) (Note 5)	$R_{\theta JA}$	360 305	$^\circ\text{C/W}$
Operating Temperature Range	T_j	-65 to +125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to +125	$^\circ\text{C}$

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 1)	$V_{(BR)R}$	40	—	—	V	$I_R = 40\mu\text{A}$
Forward Voltage	V_F	—	0.48	0.55 0.51	V	$I_F = 1\text{A}$, $T_J = 25^\circ\text{C}$ $I_F = 1\text{A}$, $T_J = 100^\circ\text{C}$
Leakage Current (Note 1)	I_R	—	—	10 40 5	μA μA mA	$V_R = 5\text{V}$, $T_J = 25^\circ\text{C}$ $V_R = 40\text{V}$, $T_J = 25^\circ\text{C}$ $V_R = 40\text{V}$, $T_A = 100^\circ\text{C}$

Notes: 1. Short duration pulse test used to minimize self-heating effect.

2. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.

3. No purposefully added lead.

4. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.

5. Part mounted on polyimide board with pad sizes $0.24'' \times 0.16''$.

6. Part mounting such that $R_{\theta JA} = 175^\circ\text{C/W}$.

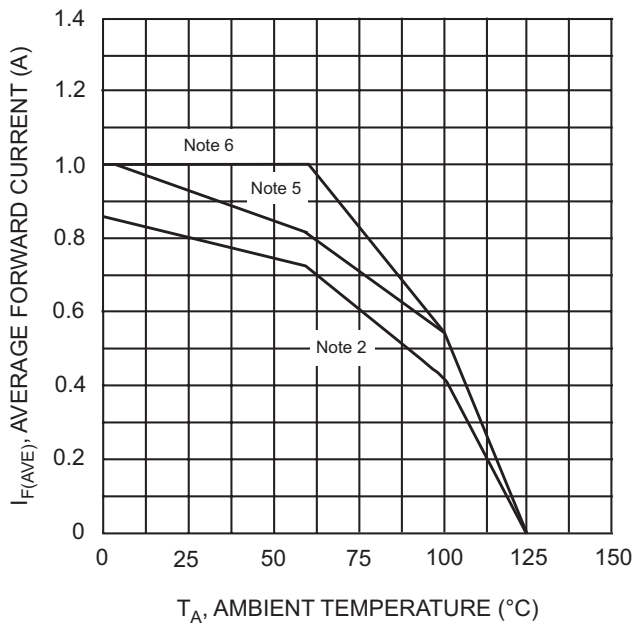


Fig. 1 Forward Current Derating

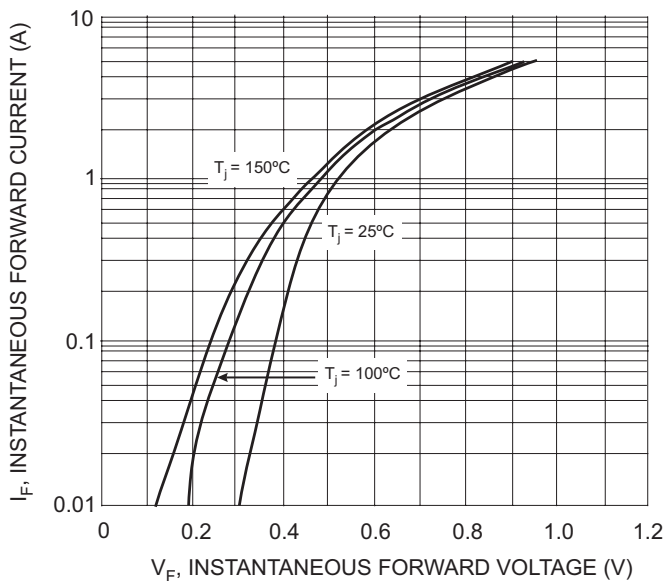


Fig. 2 Typical Forward Characteristics

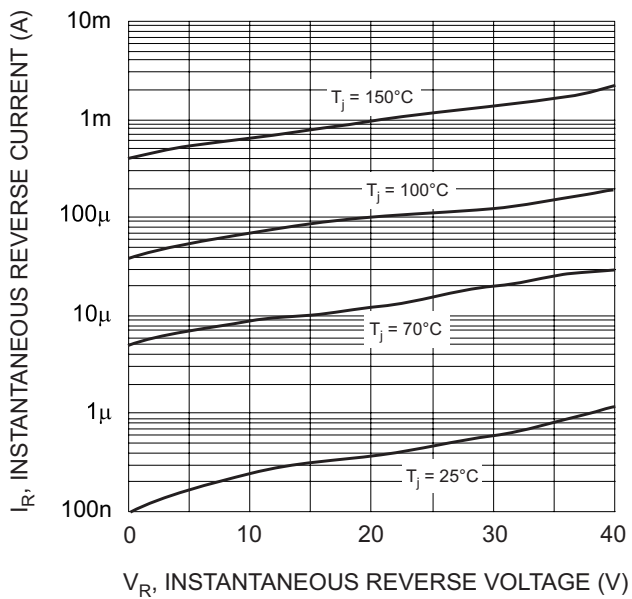


Fig. 3 Typical Reverse Current vs. Reverse Voltage

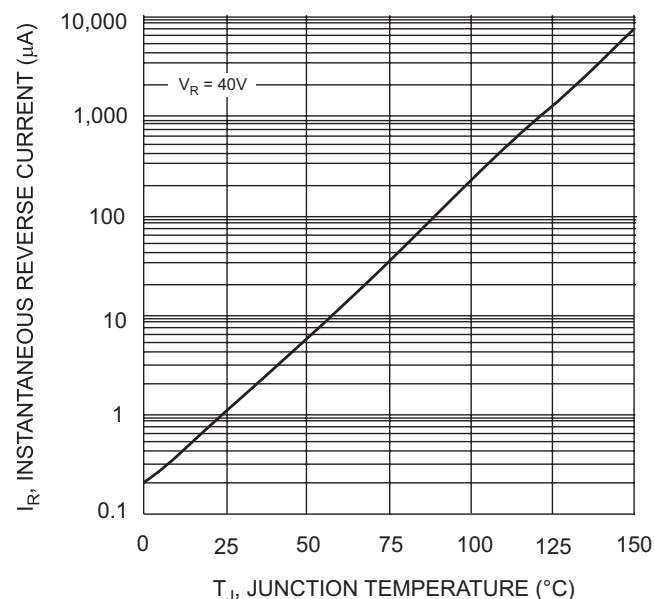


Fig. 4 Typical Reverse Current vs. Junction Temperature

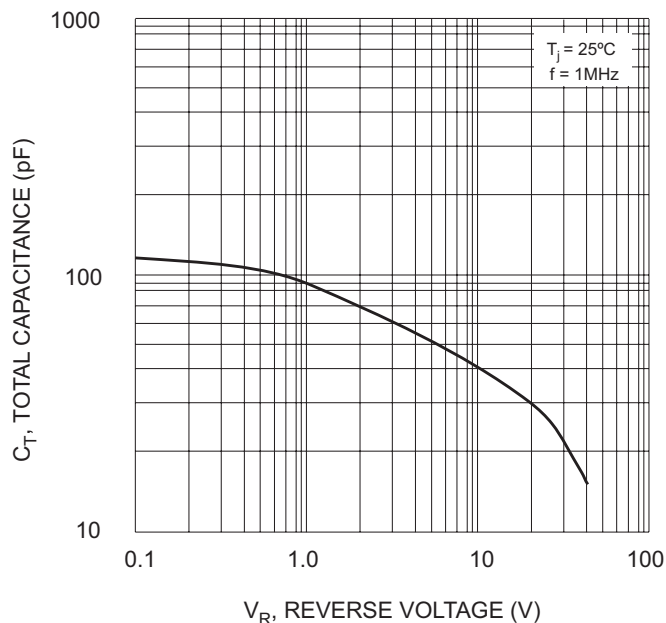


Fig. 5 Typical Total Capacitance vs. Reverse Voltage

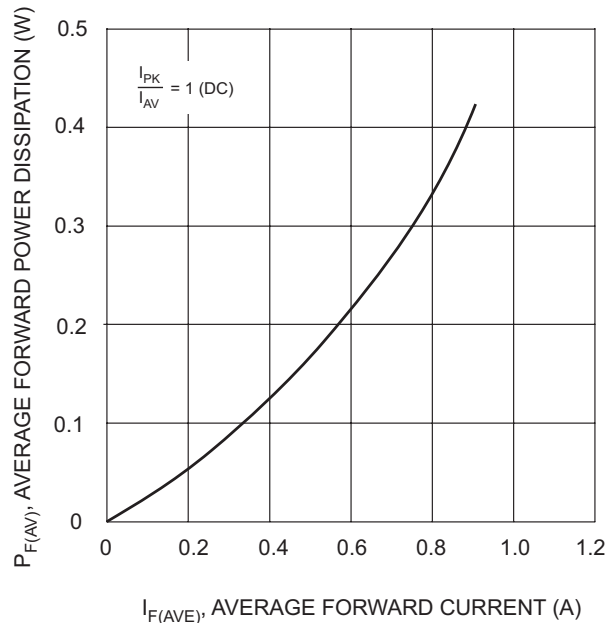


Fig. 6 Forward Power Derating

Ordering Information (Note 6)

Device	Packaging	Shipping
B140HW-7	SOD-123	3000/Tape & Reel

Notes: 6. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



LO = Product Type Marking Code
YM = Date Code Marking
Y = Year (ex: S = 2005)
M = Month (ex: 9 = September)

Date Code Key

Year		2005	2006	2007	2008	2009
Code		S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

中发网 WWW.ZFA.CN



全球最大的PDF中文下载站



中发网
www.zfa.cn

PDF 资料下载尽在中发网