

MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS

捷多邦, 专业PCB打样工厂, 24小时加急出货




TO-18
CASE 22-04
ISSUE R

DATE 02/22/1993



SCALE 1:1

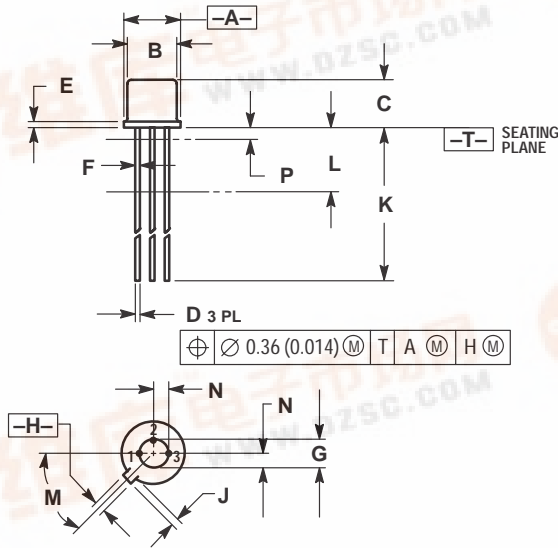

$\text{⊕} \text{ } \text{⊙} \text{ } 0.36 \text{ } (0.014) \text{ } \text{Ⓜ} \text{ } \text{T} \text{ } \text{A} \text{ } \text{Ⓜ} \text{ } \text{H} \text{ } \text{Ⓜ}$

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION J MEASURED FROM DIMENSION A MAXIMUM.
4. DIMENSION F APPLIES BETWEEN DIMENSION P AND L. DIMENSION D APPLIES BETWEEN DIMENSION L AND K MINIMUM. LEAD DIAMETER IS UNCONTROLLED IN DIMENSION P AND BEYOND DIMENSION K MINIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.209	0.230	5.31	5.84
B	0.178	0.195	4.52	4.95
C	0.170	0.210	4.32	5.33
D	0.016	0.021	0.406	0.533
E	---	0.030	---	0.762
F	0.016	0.019	0.406	0.483
G	0.100 BSC		2.54 BSC	
H	0.036	0.046	0.914	1.17
J	0.028	0.048	0.711	1.22
K	1.000	---	25.40	---
L	0.250	---	6.35	---
M	45° BSC		45° BSC	
N	0.050 BSC		1.27 BSC	
P	---	0.050	---	1.27

STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR

STYLE 2:
PIN 1. SOURCE, SUBSTRATE & CASE
2. GATE
3. DRAIN

STYLE 3:
PIN 1. SOURCE
2. DRAIN
3. GATE

STYLE 4:
PIN 1. SOURCE
2. DRAIN
3. GATE & CASE

STYLE 5:
PIN 1. EMITTER
2. BASE 1
3. BASE 2

STYLE 6:
PIN 1. CATHODE
2. GATE
3. ANODE

STYLE 7:
PIN 1. ANODE
2. BASE
3. CATHODE

STYLE 8:
PIN 1. GATE
2. ANODE 1
3. ANODE 2

STYLE 9:
PIN 1. ANODE 2
2. ANODE 1
3. GATE
(CONNECTED TO CASE)

STYLE 10:
PIN 1. BASE
2. EMITTER
3. BASE

STYLE 11:
PIN 1. DRAIN
2. GATE
3. SOURCE, SUBSTRATE

STYLE 12:
PIN 1. SOURCE
2. GATE
3. DRAIN (CASE)

STYLE 13:
PIN 1. ANODE
2. GATE
3. CATHODE

STYLE 14:
PIN 1. ANODE
2. OPEN
3. CATHODE

STYLE 15:
PIN 1. RETURN
2. INPUT
3. OUTPUT

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

