

Protection in Portable Electronics Applications.

FEATURES

- 300 Watts peak pulse power ($t_p=8/20\mu s$)
- Transient protection for high-speed data lines to IEC 61000-4-2(ESD) 15kV(Air), 8kV(Contact) IEC 61000-4-4(EFT) 40A($t_p=5/50ns$) IEC 61000-4-5(Lightning) 8A($t_p=8/20\mu s$)
- Standard SOT-23 Package.
- Tow devices will protect one line.
- Low capacitance-5pF.
- Low clamping voltage.
- ESD Protection>25kilovolts.

APPLICATIONS


- Cellular Phone Handsets and Accessories.
- Microprocessor based equipment.
- Personal Digital Assistants (PDA's)
- Notebooks, desktops PC, & servers.
- High-Speed data lines.
- Portable Instrumentation.
- LAN/WAN equipment.

MAXIMUM RATING ($T_a=25^\circ C$)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Peak Pulse Power ($t_p=8/20\mu s$)	P_{PK}	300	W
Peak Pulse Current ($t_p=8/20\mu s$)	I_{PP}	8	A
Operating Temperature	T_j	-55 ~ 150	$^\circ C$
Storage Temperature	T_{stg}	-55 ~ 150	$^\circ C$

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage	V_{RWM}	-	-	-	24	V
Reverse Breakdown Voltage	V_{BR}	$I_f=1mA$	26.7	-	-	V
Reverse Leakage Current	I_R	$V_{RWM}=24V$	-	-	1	μA
Clamping Voltage	V_C	$I_{PP}=8A, t_p=8/20\mu s$	-	-	43.5	V
Junction Capacitance	C_j	$V_R=0V, f=1MHz$ (Pin 2 to 1)	-	-	5	pF

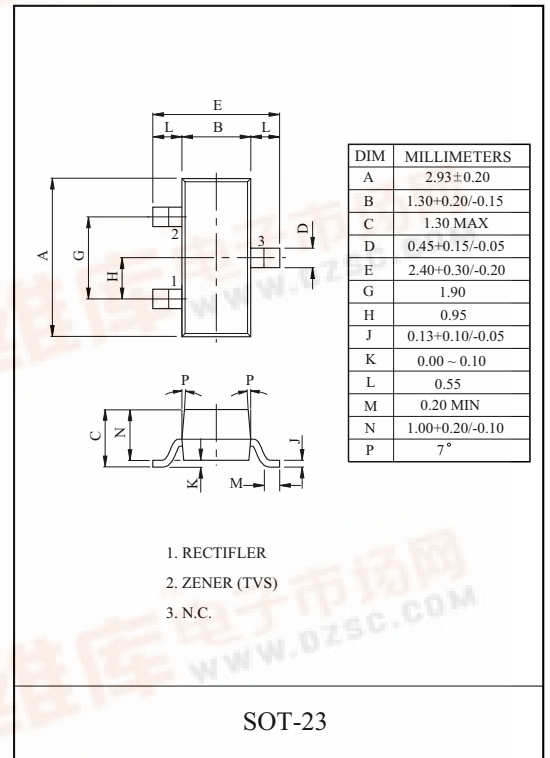


Marking

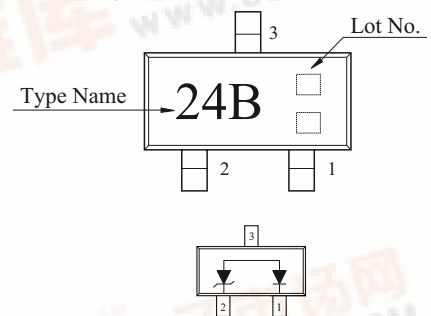


PG24BUS23


NON-REPETITIVE PEAK PULSE POWER VS. PULSE TIME

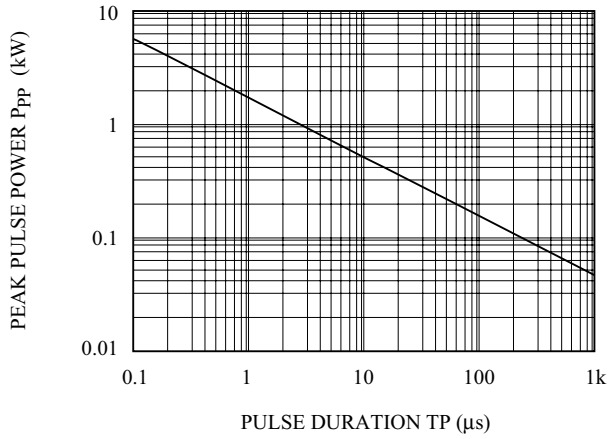

POWER DERATION CURVE

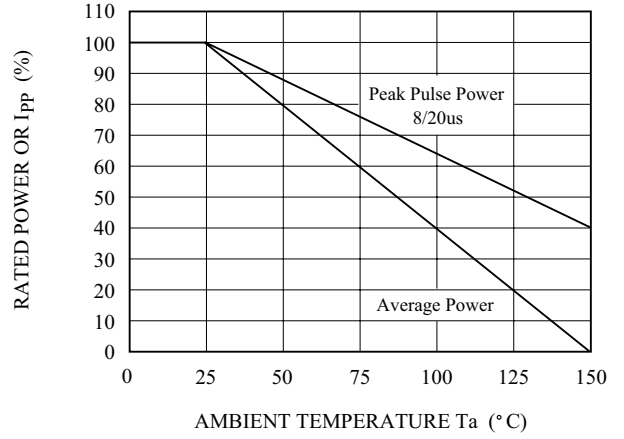

PULSE WAVEFORM

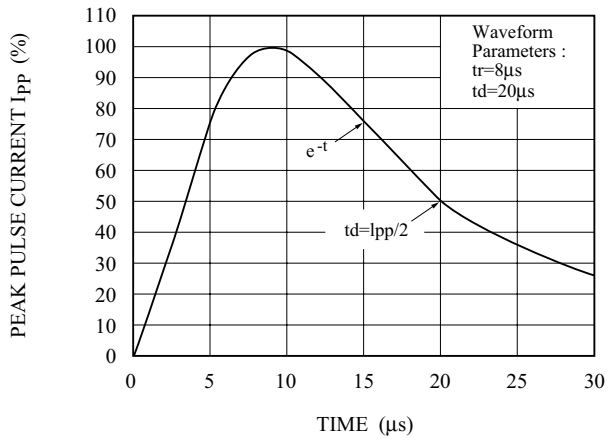

$C_J - V_R$

