

7MBR75U2B060

IGBT Modules

IGBT MODULE (U series) 600V / 75A / PIM



■ Features

- Low $V_{CE(sat)}$
- Compact Package
- P.C. Board Mount Module
- Converter Diode Bridge Dynamic Brake Circuit

■ Applications

- Inverter for Motoe Drive
- AC and DC Servo Drive Amplifier
- Uninterruptible Power Supply

■ Maximum ratings and characteristics

● Absolute maximum ratings ($T_c=25^{\circ}C$ unless otherwise specified)

Item	Symbol	Condition	Rating	Unit	
Inverter	Collector-Emitter voltage	V_{CES}	600	V	
	Gate-Emitter voltage	V_{GES}	± 20	V	
	Collector current	I_C	Continuous	75	A
		I_{CP}	1ms	150	
		$-I_C$		75	
	$-I_C$ pulse	1ms	150		
	Collector power dissipation	P_C	1 device	255	W
Brake	Collector-Emitter voltage	V_{CES}	600	V	
	Gate-Emitter voltage	V_{GES}	± 20	V	
	Collector current	I_C	Continuous	30	A
		I_{CP}	1ms	60	A
	Collector power dissipation	P_C	1 device	133	W
	Repetitive peak reverse voltage	V_{RRM}	600	V	
Converter	Repetitive peak reverse voltage	V_{RRM}	800	V	
	Average output current	I_D	50Hz/60Hz sine wave	75	A
	Surge current (Non-Repetitive)	I_{FSM}	$T_J=150^{\circ}C, 10ms$	525	A
	I^2t (Non-Repetitive)	I^2t	half sine wave	1378	A^2s
Operating junction temperature	T_J		+150	$^{\circ}C$	
Storage temperature	T_{sg}		-40 to +125	$^{\circ}C$	
Isolation voltage	between terminal and copper base *2 between thermistor and others *3	V_{iso}	AC : 1 minute	AC 2500	V
				AC 2500	V
Mounting screw torque			3.5 *1	N·m	

*1 Recommendable value : 2.5 to 3.5 N·m (M5)

*2 All terminals should be connected together when isolation test will be done.

*3 Two thermistor terminals should be connected together, each other terminals should be connected together and shorted to base plate when isolation test will be done.

IGBT Module

7MBR75U2B060

● Electrical characteristics (Tj=25°C unless otherwise specified)


Item	Symbol	Condition	Characteristics			Unit		
			Min.	Typ.	Max.			
Inverter	Zero gate voltage collector current	ICES	VCE=600V, VGE=0V		-	1.0	mA	
	Gate-Emitter leakage current	IGES	VCE=0V, VGE=±20V		-	200	nA	
	Gate-Emitter threshold voltage	VGE(th)	VCE=20V, IC=75mA		6.2	6.7	7.7	V
	Collector-Emitter saturation voltage	VCE(sat) (terminal)	VGE=15V IC=75A	Tj=25°C	-	2.20	2.50	V
				Tj=125°C	-	2.40	-	
		VCE(sat) (chip)		Tj=25°C	-	1.85	-	
				Tj=125°C	-	2.15	-	
	Input capacitance	Cies	VGE=0V, VCE=10V, f=1MHz		-	5.4	-	nF
	Turn-on time	ton	VCC=300V		-	0.42	1.20	µs
		tr	IC=75A		-	0.24	0.60	
		tr(i)	VGE=±15V		-	0.05	-	
	Turn-off time	toff	RG=47Ω		-	0.42	1.20	µs
tr				-	0.03	0.45		
Forward on voltage	VF (terminal)	VGE=0V IF=75A	Tj=25°C	-	1.95	2.30	V	
			Tj=125°C	-	2.00	-		
	VF (chip)		Tj=25°C	-	1.60	-		
			Tj=125°C	-	1.65	-		
Reverse recovery time	trr	IF=75A		-	-	0.35	µs	
Brake	Zero gate voltage collector current	ICES	VCE=600V, VGE=0V		-	1.0	mA	
	Gate-Emitter leakage current	IGES	VCE=0V, VGE=±20V		-	200	nA	
	Collector-Emitter saturation voltage	VCE(sat) (terminal)	IC=30A VGE=15V	Tj=25°C	-	2.00	2.30	V
				Tj=125°C	-	2.30	-	
		VCE(sat) (chip)		Tj=25°C	-	1.85	-	
				Tj=125°C	-	2.15	-	
	Turn-on time	ton	VCC=300V		-	0.42	1.20	µs
		tr	IC=30A		-	0.24	0.60	
	Turn-off time	toff	VGE=±15V		-	0.42	1.20	µs
		tr	RG=120Ω		-	0.03	0.45	
	Reverse current	IRRM	VR=600V		-	-	1.0	mA
	Converter	Forward on voltage	VFM	IF=75A	terminal	-	1.20	1.50
VGE=0V				chip	-	1.10	-	
Reverse current	IRRM	VR=800V		-	-	1.0	mA	
Thermistor	Resistance	R	T=25°C	-	5000	-	Ω	
			T=100°C	465	495	520		
	B value	B	T=25/50°C		3305	3375	3450	K

● Thermal resistance Characteristics







Item	Symbol	Condition	Characteristics			Unit
			Min.	Typ.	Max.	
Thermal resistance (1 device)	Rth(j-c)	Inverter IGBT	-	-	0.49	°C/W
		Inverter FWD	-	-	0.79	
		Brake IGBT	-	-	0.94	
		Converter Diode	-	-	0.66	
Contact thermal resistance *	Rth(c-f)	With thermal compound	-	0.05	-	







* This is the value which is defined mounting on the additional cooling fin with thermal compound




■ Equivalent Circuit Schematic

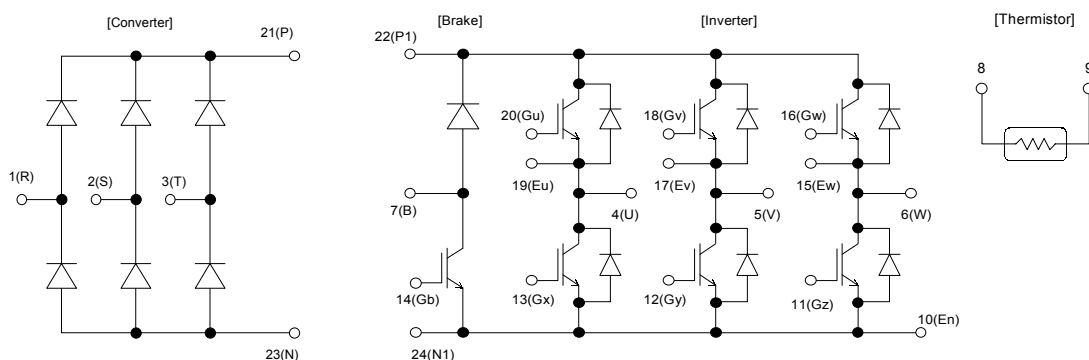


■ Characteristics (Representative)

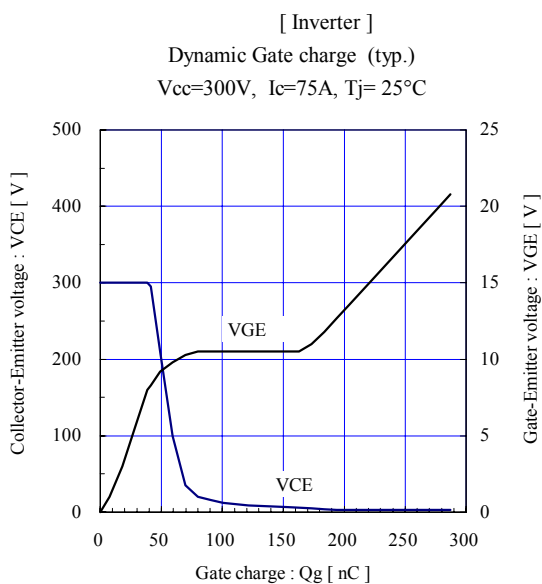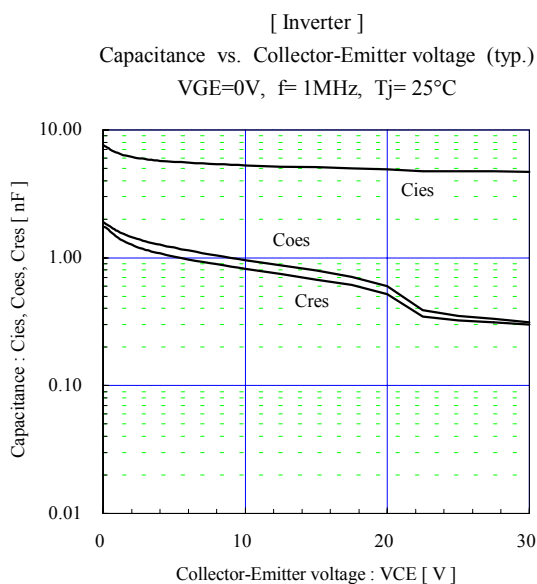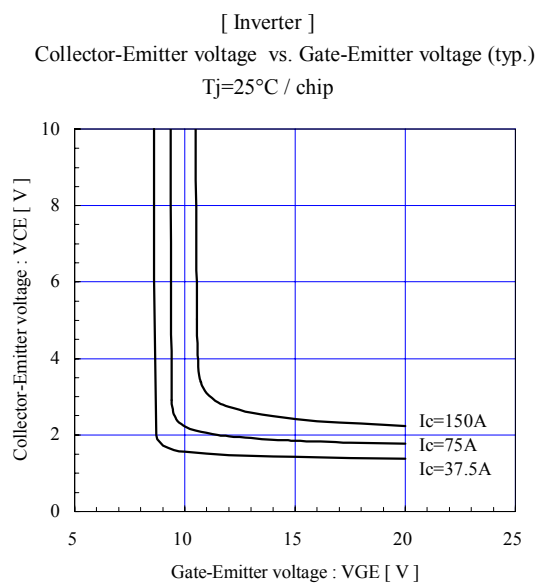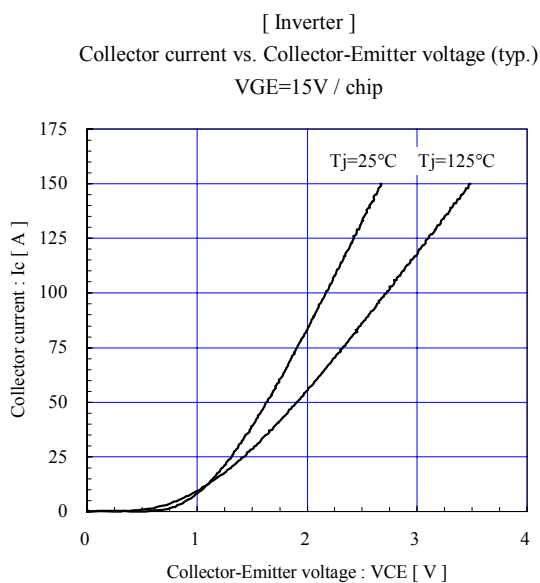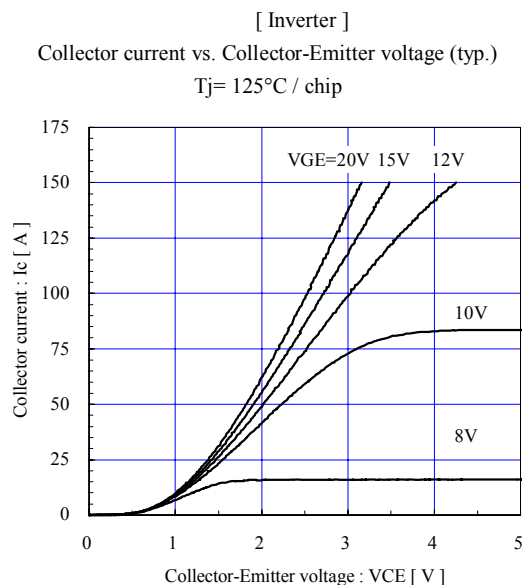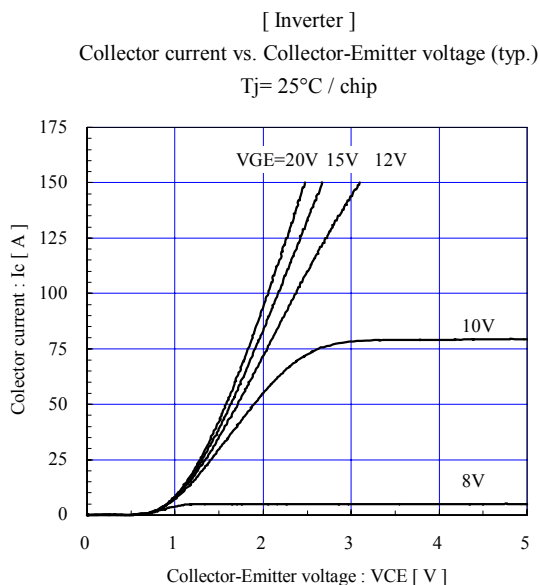

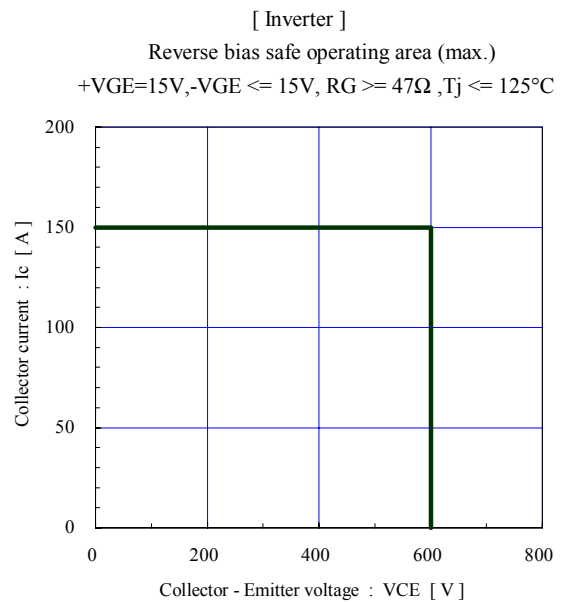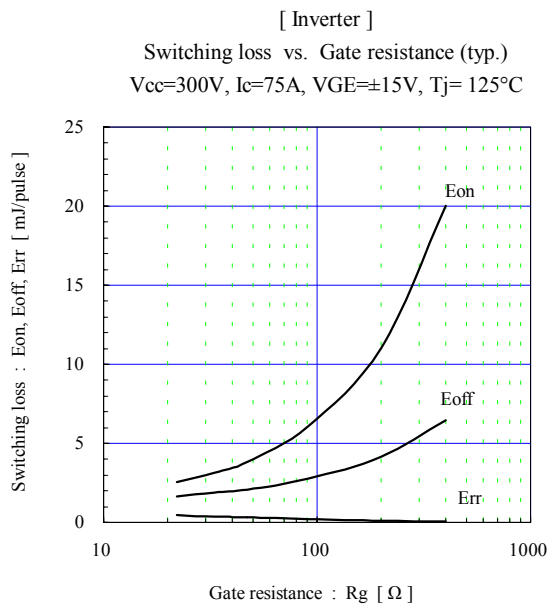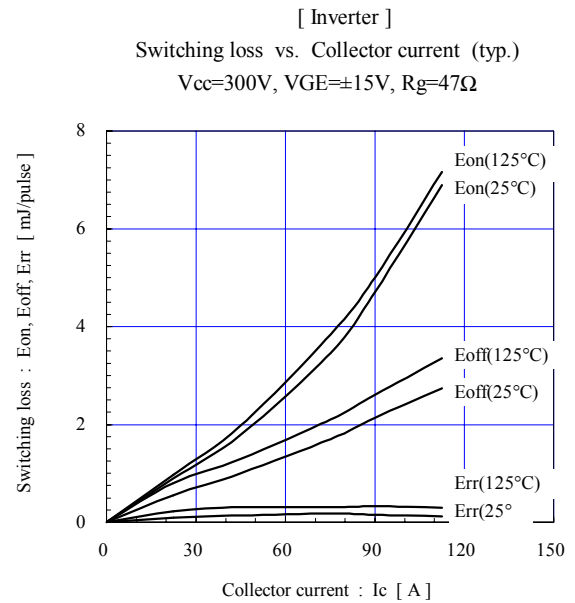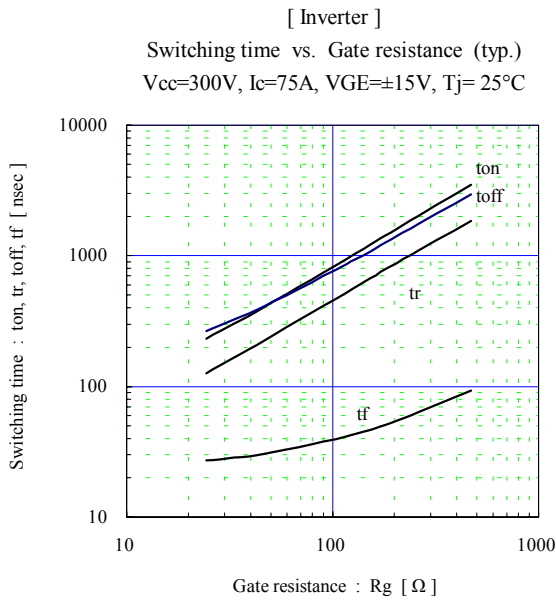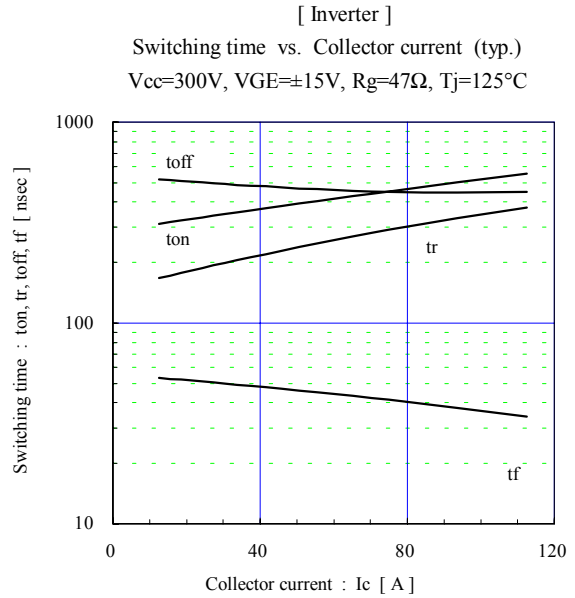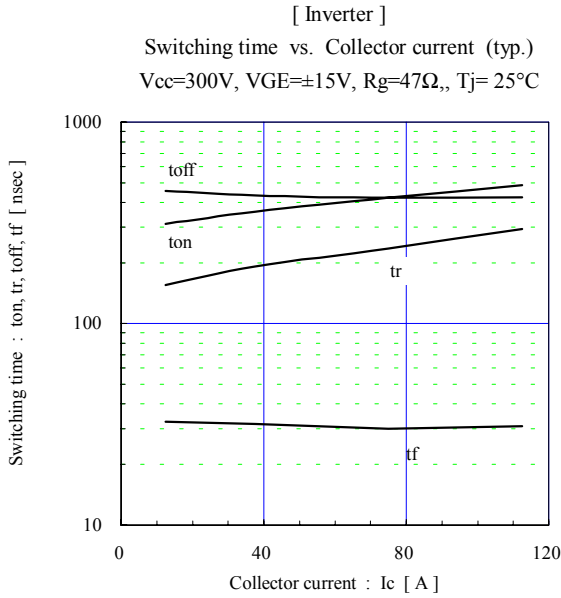

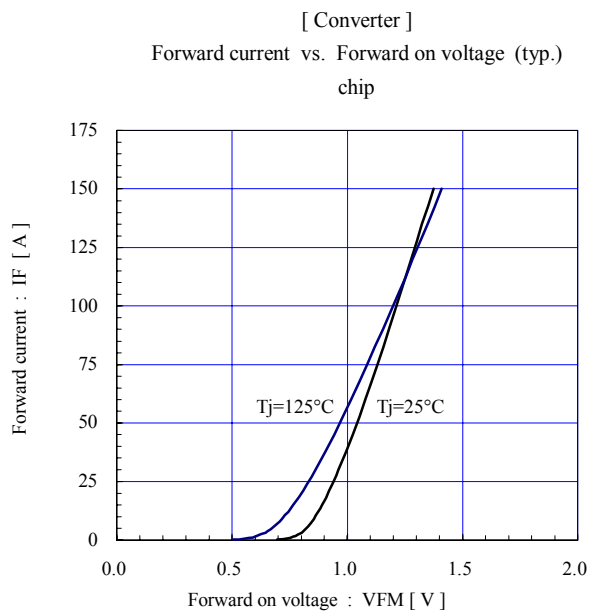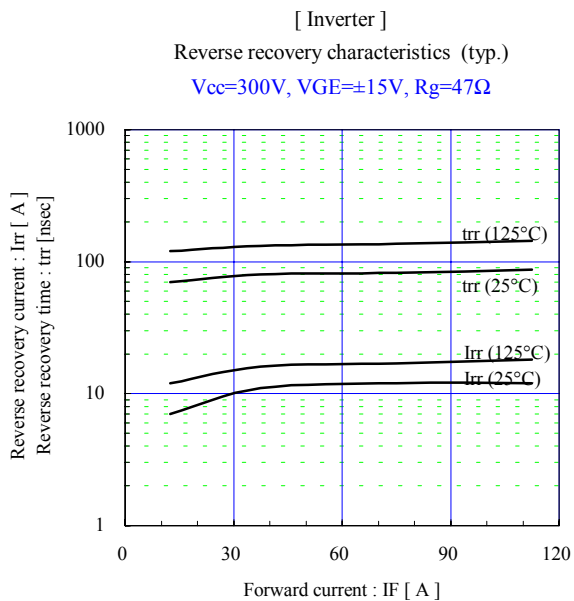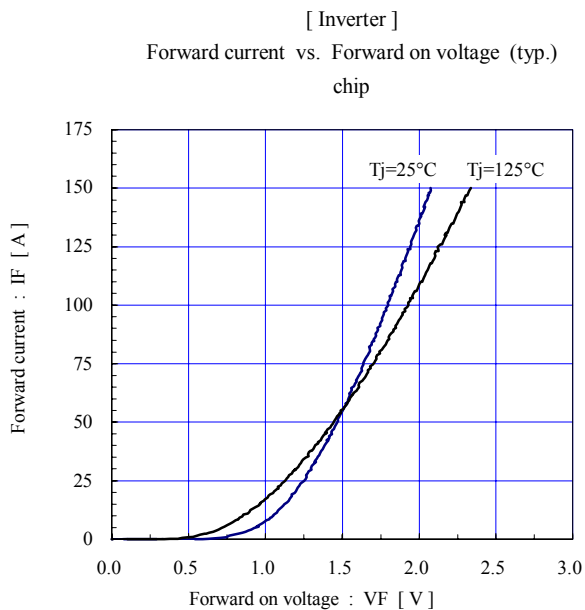








Transient thermal resistance (max.)

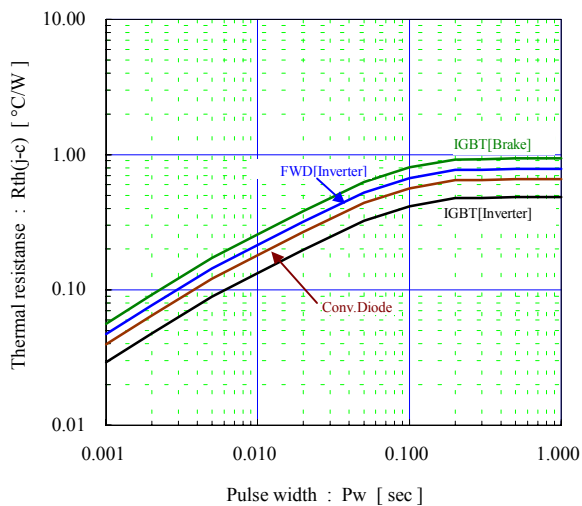

[Thermistor]

Temperature characteristic (typ.)

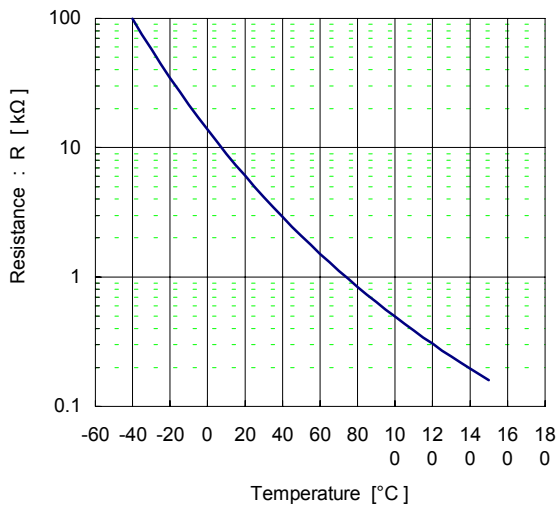

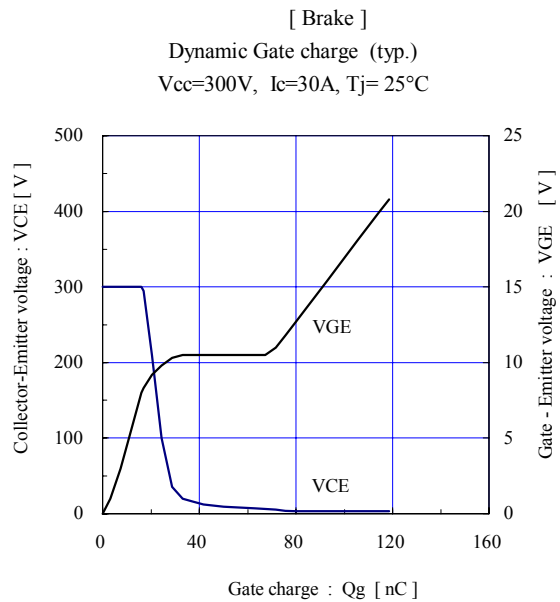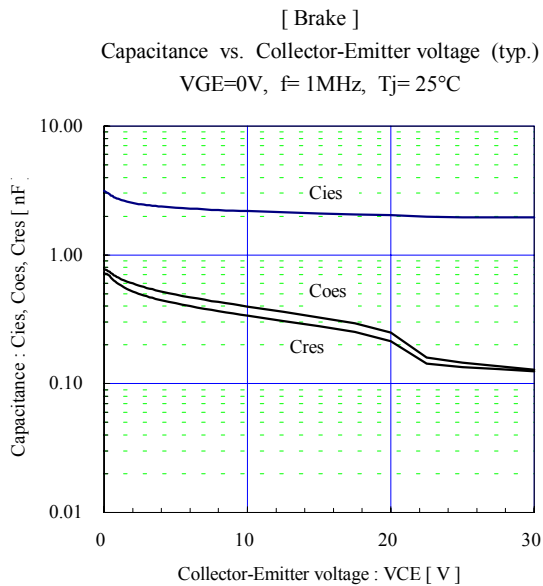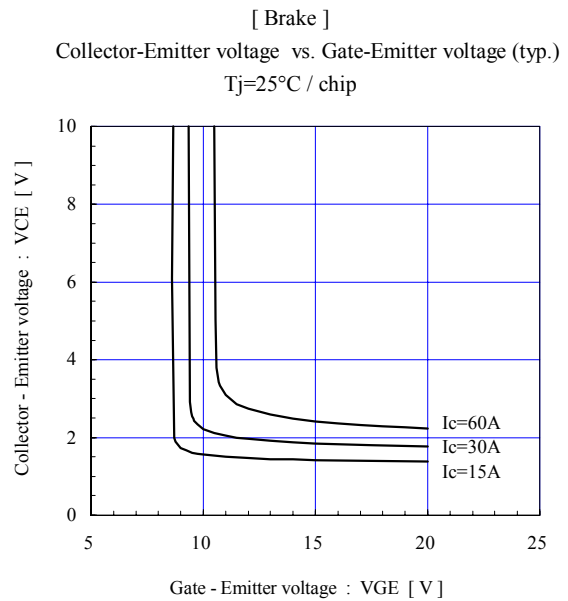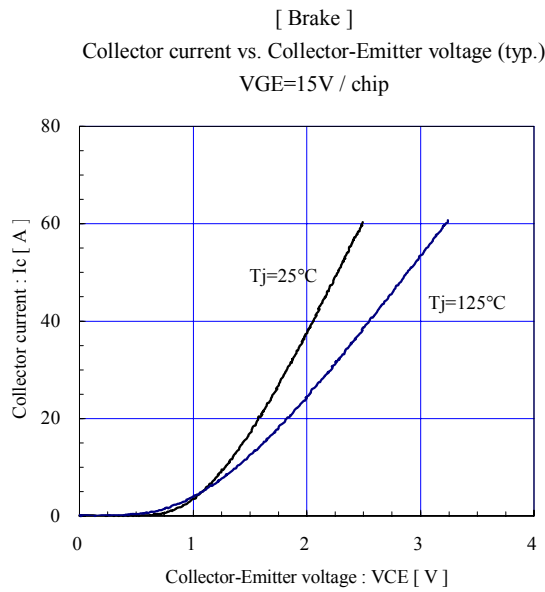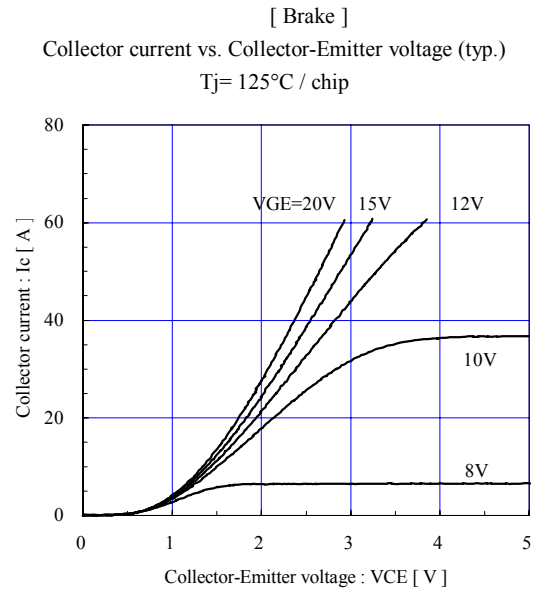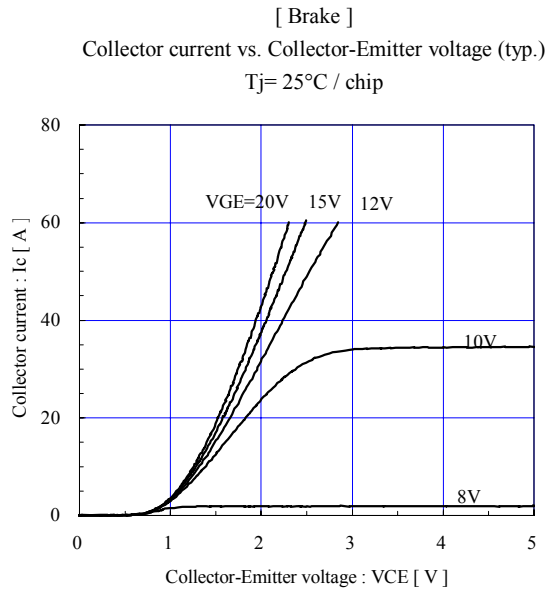

■ Outline Drawings, mm

