

APL5521



Dual-Channel, 3.3V/500mA and 2.5V/300mA Linear Regulator

Features

- Fixed Output Voltage :
 $V_{OUT1}=3.3V/500mA$
 $V_{OUT2}=2.5V/300mA$
- Low Dropout Voltage (defined as the minimum input/output voltage difference):
 Output 1 Dropout Voltage : 1.25V (at 500mA)
 Output 2 Dropout Voltage : 1.2V (at 300mA)
- Stable with 10uF Output Capacitor(at V_{OUT1})
 Stable with 10uF Output Capacitor(at V_{OUT2})
- No Protection Diodes Needed
- Built in Thermal Protection
- Built in Current Limit Protection
- Fast transient Response
- Short Setting Time
- SOP-8 Package Available


General Description

The APL5521 is a dual low dropout regulator with output 1 with 3.3V/0.5A and output2 with 2.5V/0.3A output capability. In order to obtain lower dropout voltage and faster transient response, which is critical for low voltage applications, the APL5521 has been optimized. The dropout voltages are guaranteed at 1.25V at 0.5A for output1 and 1.2V at 0.3A for output 2. Current limit is trimmed to ensure specified output current and controlled short-circuit current. On-chip thermal limiting provides protection against any combination of overload that would create excessive junction temperatures. The APL5521 regulator comes in a SOP-8 package.

Applications

- Desktop Computer
- Networking Systems
- Optical Data Storage Systems

Pin Configuration

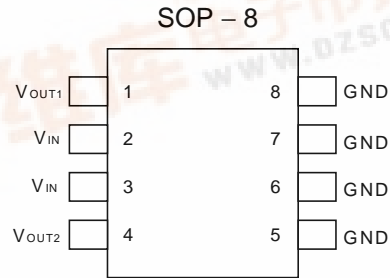

APL5521

Ordering and Marking Information

<p>APL5521 □□-□□□</p>	<p>Package Code K : SO-8</p> <p>Operating Junction Temp. Range C : 0 to 150°C</p> <p>Handling Code TU : Tube TR : Tape & Reel</p> <p>Lead Free Code L : Lead Free Device Blank : Original Device</p>
<p>APL5521 K : APL5521 XXXXX</p>	<p>XXXXX - Date Code</p>

ANPEC reserves the right to make changes to improve reliability or manufacturability without notice, and advise customers to obtain the latest version of relevant information to verify before placing orders.

Pin Description

PIN		I/O	Description
No.	Name		
1	V _{OUT1}	O	V _{OUT1} output Voltage 3.3V. sources up to 500 mA.
2	V _{IN}	I	Supply Voltage. Voltage can range from 4.75V to 8V
3	V _{IN}	I	Supply Voltage. Voltage can range from 4.75V to 8V
4	V _{OUT2}	O	V _{OUT2} output Voltage 2.5V. sources up to 300 mA.
5	GND		Ground also functions as a heatsink. Solder to the ground plane to maximize thermal dissipation
6	GND		
7	GND		
8	GND		

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
V _{IN} , V _{OUT}	Input Voltage or Out Voltage	9	V
R _{TH,JA}	Thermal Resistance – Junction to Ambient	80	°C/W
PD	Power Dissipation	Internally Limited	W
T _J	Operating Junction Temperature		°C
	Control Section	0 to 125	
	Power Transistor	0 to 150	
T _{STG}	Storage Temperature Range	-65 to +150	°C
TL	Lead Temperature (Soldering, 10 second)	260	°C

Electrical Characteristics

Unless otherwise noted these specifications apply over full temperature, T_J=0 to 125°C. Typical values refer to T_J=25°C.

Symbol	Parameter	Test Conditions	APL5521			Unit
			Min.	Typ.	Max.	
V _{IN}	Input Voltage		4.75		8	V
I _Q	Quiescent Current	I _{OUT1} =0mA, I _{OUT2} =0mA		10	16	mA
OTS	Over Temperature Shutdown			150		°C
	Over Temperature Shutdown Hysteresis	Hysteresis		10		°C
TC	Output Voltage Temperature Coefficient			50		ppm/°C


Electrical Characteristics (Cont.)

Unless otherwise noted these specifications apply over full temperature, $T_j=0$ to 125°C . Typical values refer to $T_j=25^\circ\text{C}$.

Symbol	Parameter	Test Conditions	APL5521			Unit
			Min.	Typ.	Max.	
Output1 (500mA)						
V_{OUT1}	Output 1 Voltage	$4.75 < V_{IN} < 8.0\text{V}$, $0\text{mA} < I_{OUT1} < 500\text{mA}$	3.234	3.3	3.366	V
I_{OUT1}	Output 1 Current Capability	$V_{IN}=5\text{V}$	500			mA
REG_{LINE}	Line Regulation	$4.75 < V_{IN} < 8.0\text{V}$, $I_{OUT1}=0\text{mA}$		1	10	mV
REG_{LOAD}	Load Regulation	$V_{IN}=5\text{V}$, $0\text{mA} < I_{OUT1} < 500\text{mA}$		14	24	mV
	Load Transient	$V_{IN}=5\text{V}$, $I_{OUT1}=1\text{mA}\sim 500\text{mA}$ in 30us		70	150	mV
V_{DROP}	Dropout Voltage ^(Note)	$I_{OUT1}=500\text{mA}$		1.25	1.4	V
PSRR	Ripple Rejection	$F \leq 1\text{kHz}$, 1Vpp at $V_{IN}=5\text{V}$	55	65		dB
C_{OUT}	Output Capacitor	C_{OUT1}		10		μF
Output2 (300mA)						
V_{OUT2}	Output 2 Voltage	$4.75 < V_{IN} < 8.0\text{V}$, $0\text{mA} < I_{OUT2} < 300\text{mA}$	2.450	2.5	2.550	V
I_{OUT2}	Output 2 Current Capability	$V_{IN}=5\text{V}$	300			mA
REG_{LINE}	Line Regulation	$4.75 < V_{IN} < 8.0\text{V}$, $I_{OUT2}=0\text{mA}$		1	10	mV
REG_{LOAD}	Load Regulation	$V_{IN}=5\text{V}$, $0\text{mA} < I_{OUT2} < 300\text{mA}$		8	18	mV
	Load Transient	$V_{IN}=5\text{V}$, $I_{OUT2}=1\text{mA}\sim 300\text{mA}$ in 20us		70	150	mV
V_{DROP}	Dropout Voltage ^(Note)	$I_{OUT1}=300\text{mA}$		1.2	1.35	V
PSRR	Ripple Rejection	$F \leq 1\text{kHz}$, 1Vpp at $V_{IN}=5\text{V}$	55	65		dB
C_{OUT}	Output Capacitor	C_{OUT2}		10		μF


Note: Dropout voltage definition : $V_{IN}-V_{OUT}$ when V_{OUT} is 2% below the value of V_{OUT} for $V_{IN} = V_{OUT} + 1.4\text{V}$

Application Circuit

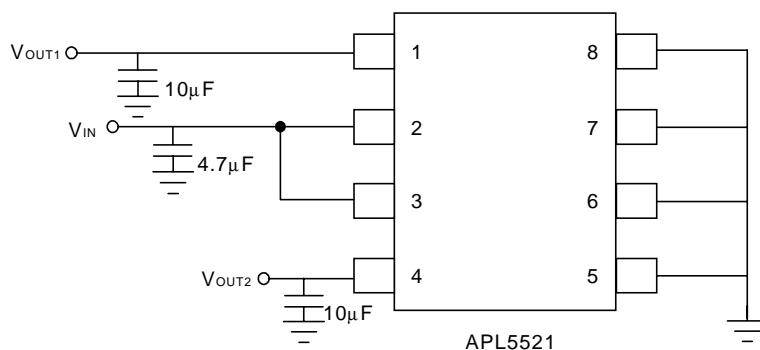


Typical Characteristics


Output Voltage vs. Input Voltage

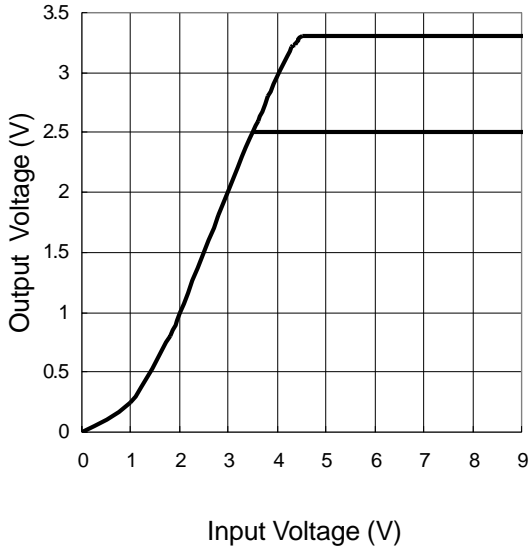


Output 1 Voltage vs. Temperature

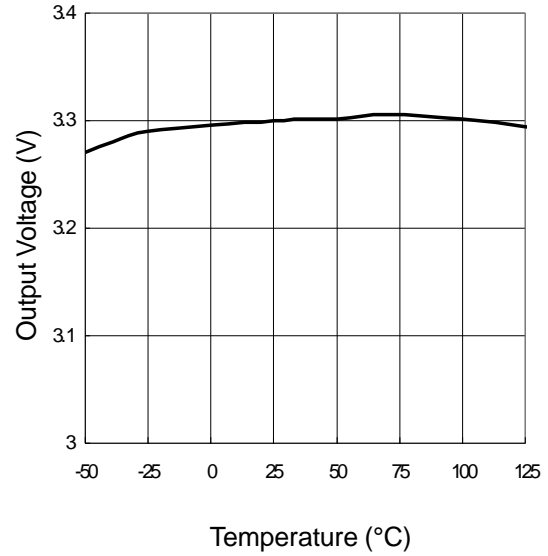





Output2 Voltage vs. Temperature

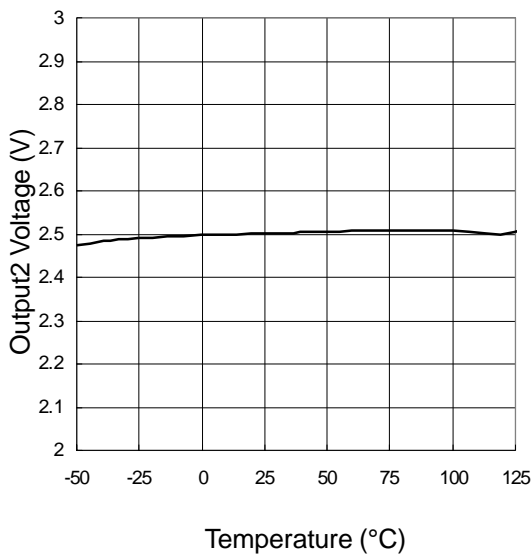

Dropout Voltage vs. Temperature

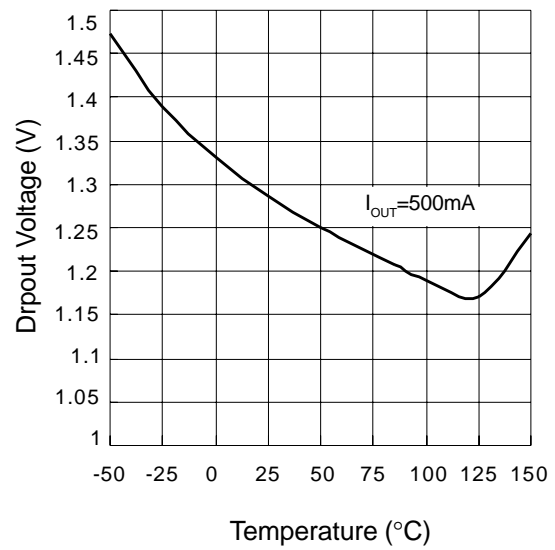


Typical Characteristics (Cont.)

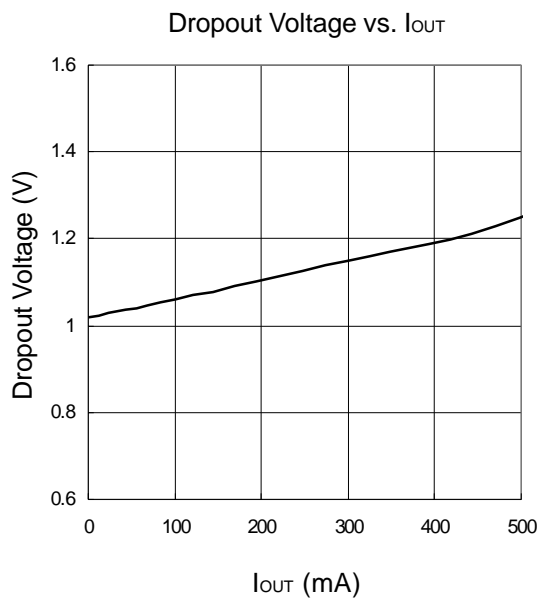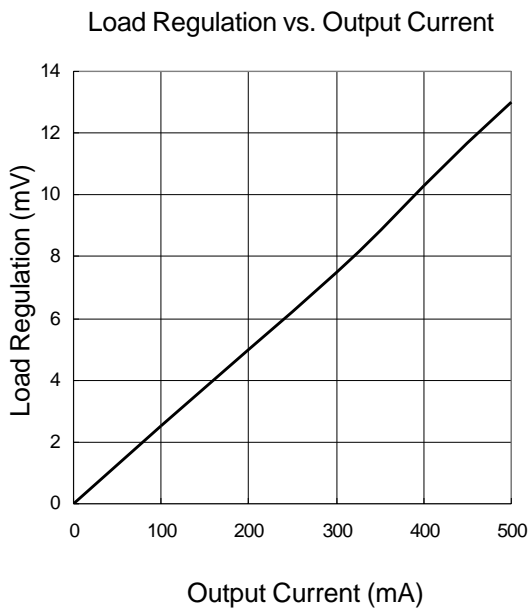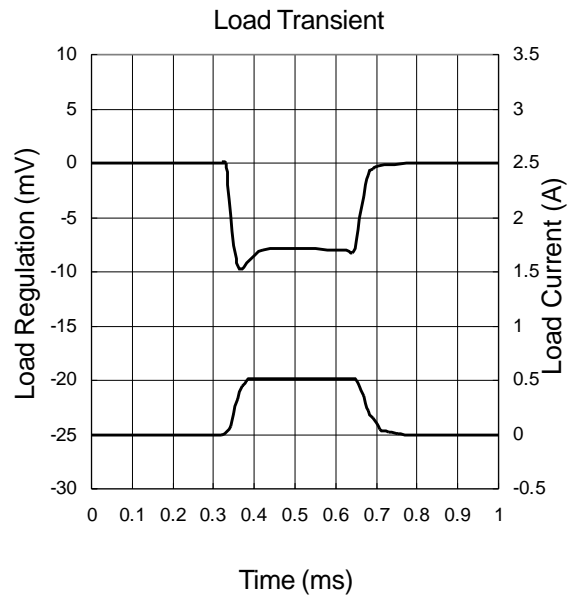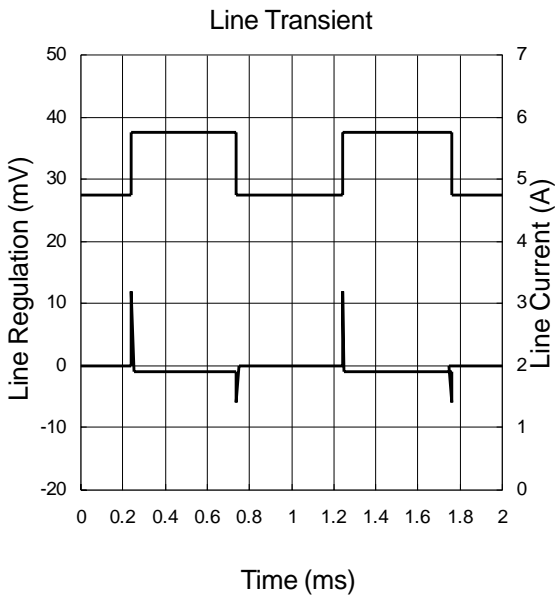

Packaging Information

SOP-8 pin (Reference JEDEC Registration MS-012)

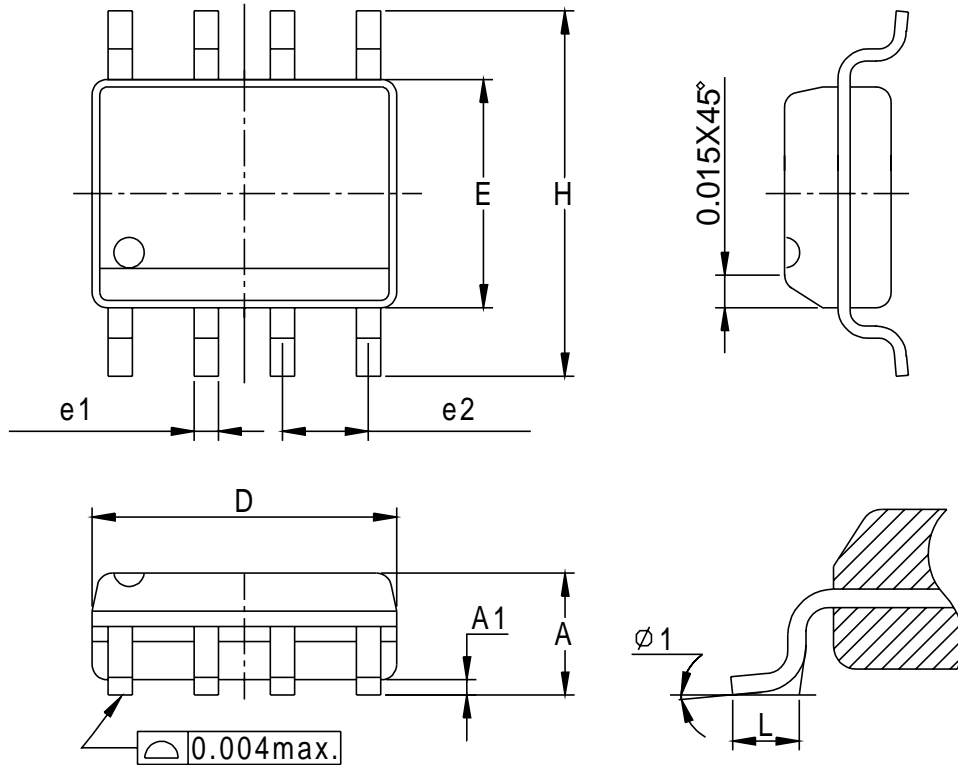


Dim	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.35	1.75	0.053	0.069
A1	0.10	0.25	0.004	0.010
D	4.80	5.00	0.189	0.197
E	3.80	4.00	0.150	0.157
H	5.80	6.20	0.228	0.244
L	0.40	1.27	0.016	0.050
e1	0.33	0.51	0.013	0.020
e2	1.27BSC		0.50BSC	
φ 1	8°		8°	

Physical Specifications

Terminal Material	Solder-Plated Copper (Solder Material : 90/10 or 63/37 SnPb), 100%Sn
Lead Solderability	Meets EIA Specification RSI86-91, ANSI/J-STD-002 Category 3.

Reflow Condition (IR/Convection or VPR Reflow)

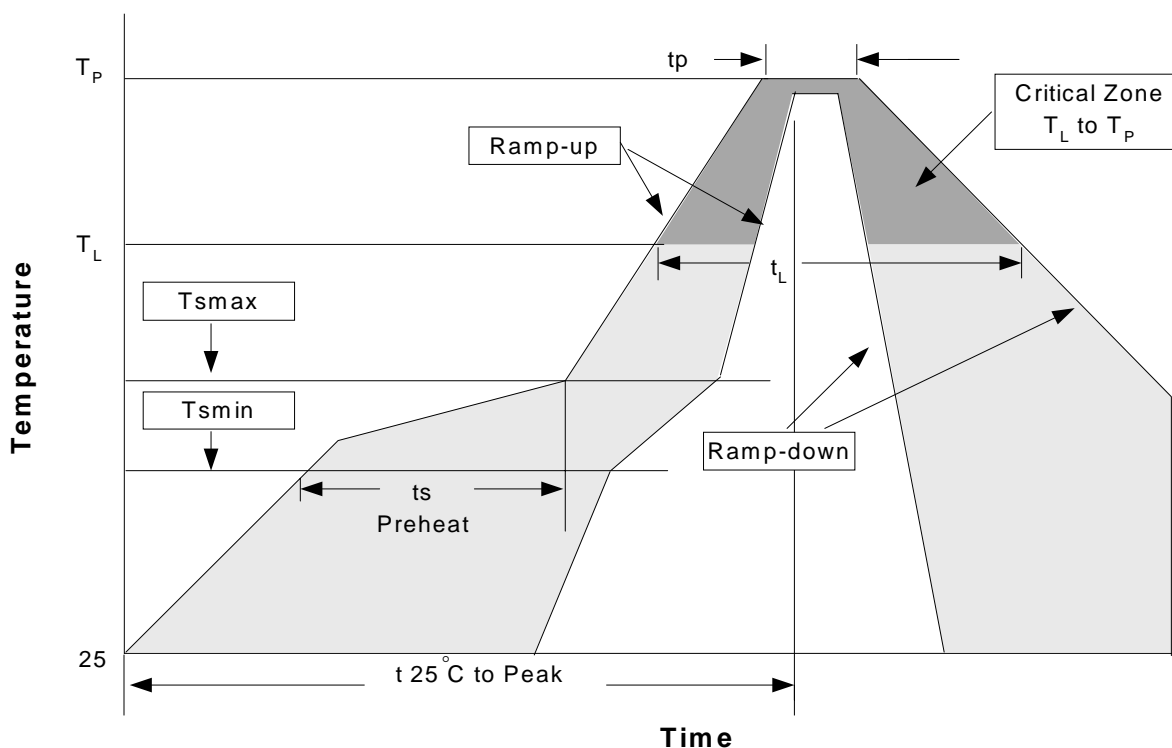

Classification Reflow Profiles


Profile Feature	Sn-Pb Eutectic Assembly		Pb-Free Assembly	
	Large Body	Small Body	Large Body	Small Body
Average ramp-up rate (T _L to T _P)	3°C/second max.		3°C/second max.	
Preheat				
- Temperature Min (T _{smin})	100°C		150°C	
- Temperature Mix (T _{smax})	150°C		200°C	
- Time (min to max)(t _s)	60-120 seconds		60-180 seconds	
T _{smax} to T _L			3°C/second max	
- Ramp-up Rate				
T _{smax} to T _L				
- Temperature(T _L)	183°C		217°C	
- Time (t _L)	60-150 seconds		60-150 seconds	
Peak Temperature(T _p)	225 +0/-5°C	240 +0/-5°C	245 +0/-5°C	250 +0/-5°C
Time within 5°C of actual Peak Temperature(t _p)	10-30 seconds	10-30 seconds	10-30 seconds	20-40 seconds
Ramp-down Rate	6°C/second max.		6°C/second max.	
Time 25°C to Peak Temperature	6 minutes max.		8 minutes max.	

Note: All temperatures refer to topside of the package. Measured on the body surface.

Reliability test program

Test item	Method	Description
SOLDERABILITY	MIL-STD-883D-2003	245°C , 5 SEC
HOLT	MIL-STD-883D-1005.7	1000 Hrs Bias @ 125 °C
PCT	JESD-22-B, A102	168 Hrs, 100 % RH , 121°C
TST	MIL-STD-883D-1011.9	-65°C ~ 150°C, 200 Cycles
ESD	MIL-STD-883D-3015.7	VHBM > 2KV, VMM > 200V
Latch-Up	JESD 78	10ms , I _{tr} > 100mA

Carrier Tape

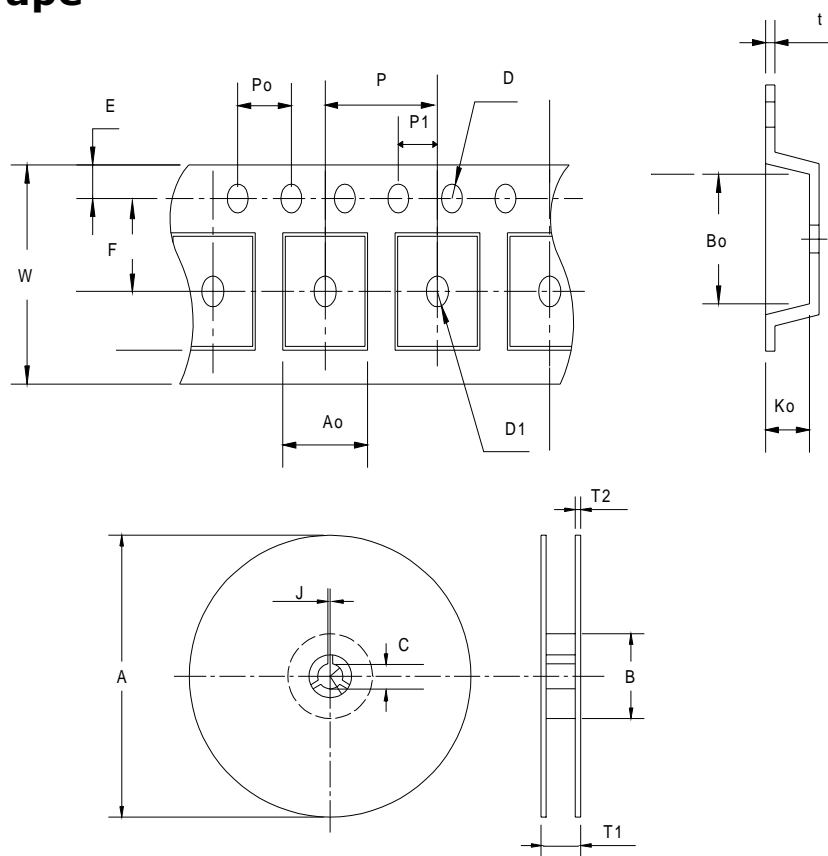

Application	A	B	C	J	T1	T2	W	P	E
SOP-8	330±1	62 ± 1.5	12.75 + 0.15	2 + 0.5	12.4 +0.2	2± 0.2	12 + 0.3 - 0.1	8± 0.1	1.75± 0.1
Application	F	D	D1	Po	P1	Ao	Bo	Ko	t
SOP-8	5.5 ± 0.1	1.55±0.1	1.55+ 0.25	4.0 ± 0.1	2.0 ± 0.1	6.4 ± 0.1	5.2± 0.1	2.1± 0.1	0.3±0.013

(mm)

Cover Tape Dimensions

Application	Carrier Width	Cover Tape Width	Devices Per Reel
SOP- 8	12	9.3	2500

Customer Service**Anpec Electronics Corp.**

Head Office :

5F, No. 2 Li-Hsin Road, SBIP,

Hsin-Chu, Taiwan, R.O.C.

Tel : 886-3-5642000

Fax : 886-3-5642050

Taipei Branch :

7F, No. 137, Lane 235, Pac Chiao Rd.,

Hsin Tien City, Taipei Hsien, Taiwan, R. O. C.

Tel : 886-2-89191368

Fax : 886-2-89191369



中发网 WWW.ZFA.CN

全球最大的PDF中文下载站



中发网
www.zfa.cn

PDF 资料下载尽在中发网