

# MAXIM

## MAX8760 Evaluation Kit

Evaluates: MAX8760

### General Description

The MAX8760 evaluation kit (EV kit) demonstrates the high-power, dynamically adjustable multiphase notebook CPU application circuit. This DC-DC converter steps down high-voltage batteries and/or AC adapters, generating a precision, low-voltage CPU core V<sub>CC</sub> rail. The MAX8760 EV kit meets the mobile AMD K8 and K8 Rev F VID code set and CPU transient voltage specifications. The MAX8760 EV kit consists of the MAX8760 dual-phase Quick-PWM™ step-down controller and the MAX6509 temperature sensor.

The MAX8760 EV kit includes active voltage positioning with adjustable gain, reducing power dissipation and bulk output capacitance requirements. Precision slew-rate control provides “just-in-time” arrival at the new DAC setting, minimizing surge currents to and from the battery.

This fully assembled and tested PC board provides a 6-bit digitally adjustable output voltage from a 7V to 24V battery input range. The EV kit operates at 300kHz switching frequency and has superior line- and load-transient response.

### Component Suppliers

| SUPPLIER              | PHONE        | WEBSITE                  |
|-----------------------|--------------|--------------------------|
| Central Semiconductor | 631-435-1110 | www.centrasemi.com       |
| NEC/Tokin             | 510-324-4110 | www.nec-tokinamerica.com |
| Nihon Semiconductor   | 847-843-7500 | www.niec.co.jp           |
| Panasonic             | 714-373-7939 | www.panasonic.com        |
| Sanyo                 | 619-661-6835 | www.sanyovideo.com       |
| Taiyo Yuden           | 800-348-2496 | www.t-yuden.com          |
| TDK                   | 847-803-6100 | www.component.tdk.com    |
| Vishay/Siliconix      | 402-564-3131 | www.vishay.com           |

**Note:** Indicate you are using the MAX8760 when contacting these component suppliers.

### Features

- ◆ Dual-Phase Quick-PWM EV Kit
- ◆ AMD K8 and K8 Rev F Compatible
- ◆ Active Voltage Positioning with Adjustable Gain, Offset, and Remote Sensing
- ◆ High Speed, Accuracy, and Efficiency
- ◆ Low Bulk Output Capacitor Count
- ◆ Multiphase Fast-Response Quick-PWM Architecture
- ◆ 7V to 24V Input Voltage Range
- ◆ 0.375V to 1.550V Output Voltage Range (6-Bit DAC)
- ◆ 30A Load-Current Capability (15A Each Phase)
- ◆ 300kHz Switching Frequency
- ◆ MAX6509 Temperature Sensor
- ◆ Fully Assembled and Tested

### Ordering Information

| PART         | TEMP RANGE   | IC PACKAGE              |
|--------------|--------------|-------------------------|
| MAX8760EVKIT | 0°C to +70°C | 40 Thin QFN (6mm x 6mm) |

### Component List

| DESIGNATION                         | QTY | DESCRIPTION                                                                                  |
|-------------------------------------|-----|----------------------------------------------------------------------------------------------|
| C1, C2, C7, C15, C22, C25, C26, C63 | 0   | Not installed (0603)                                                                         |
| C5                                  | 1   | 1000pF ±10%, 50V COG ceramic capacitor (0603)<br>TDK 1608X7R1H102K<br>Murata GRM188R71H102K  |
| C6, C21, C23                        | 3   | 0.22μF, 16V X5R ceramic capacitors (0603)<br>Taiyo Yuden LMK107BJ224MA<br>TDK C1608X7R1C224M |

| DESIGNATION       | QTY | DESCRIPTION                                                                                                                                                               |
|-------------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| C8, C10, C11, C12 | 4   | 330μF, 2.5V, 9mΩ low-ESR polymer capacitors (D case)<br>Sanyo 2R5TPE330M9<br>or<br>330μF, 2V, 7mΩ low-ESR specialty polymer capacitors (D case)<br>Panasonic EEFSD0D331XR |
| C16               | 1   | 2.2μF, 10V X5R ceramic capacitor (0805)<br>Taiyo Yuden LMK212BJ225KG<br>TDK C2012X7R1C225K                                                                                |

Quick-PWM is a trademark of Maxim Integrated Products, Inc.

# MAX8760 Evaluation Kit

## Component List (continued)

| DESIGNATION             | QTY | DESCRIPTION                                                                                                                  |
|-------------------------|-----|------------------------------------------------------------------------------------------------------------------------------|
| C17, C18, C19, C43, C65 | 5   | 10 $\mu$ F $\pm$ 20%, 25V X5R ceramic capacitors (1210)<br>TDK C3225X7R1E106M<br>AVX 12103D106M<br>Taiyo Yuden TMK325BJ106MM |
| C24                     | 1   | 100pF $\pm$ 5%, 50V C0G ceramic capacitor (0603)<br>Murata GRM1885C1H101J                                                    |
| C27                     | 1   | 1 $\mu$ F $\pm$ 20%, 10V X5R ceramic capacitor (0805)<br>Taiyo Yuden LMK212BJ105KG<br>TDK C2012X7R1C105MKT                   |
| C28                     | 1   | 270pF $\pm$ 5%, 50V C0G ceramic capacitor (0603)<br>Murata GRM188R71H271K                                                    |
| C30                     | 1   | 470pF $\pm$ 10%, 50V X7R ceramic capacitor (0603)<br>Murata GRM188R71H471K                                                   |
| C61                     | 1   | 0.1 $\mu$ F $\pm$ 10%, 50V X7R ceramic capacitor (0603)<br>Murata GRM188R71E104K<br>TDK C1608X7R1E104K                       |
| C97, C98, C100, C101    | 4   | 10 $\mu$ F $\pm$ 20%, 6.3V X5R ceramic capacitors (0805)<br>TDK C2012X5R0J106M<br>Taiyo Yuden AMK212BJ106MG                  |
| D1                      | 1   | 100mA, 30V dual Schottky diode<br>Central Semiconductor CMPSH-3A                                                             |
| D2, D3                  | 2   | 3A, 30V Schottky diodes<br>Nihon EC31QS03Lo<br>Central Semiconductor CMSH3-40                                                |
| JUA0–JUA5               | 6   | 2-pin headers                                                                                                                |
| JU2                     | 1   | 3-pin header                                                                                                                 |
| JU4                     | 1   | 4-pin header                                                                                                                 |

| DESIGNATION                               | QTY | DESCRIPTION                                                                                                                                                                                               |
|-------------------------------------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| L1, L2                                    | 2   | 0.56 $\mu$ H, 26A, 1.69m $\Omega$ power inductors (10mm x 11.5mm x 4mm)<br>Panasonic ETQP4LR56WFC<br>or<br>0.56 $\mu$ H, 29A, 1.30m $\Omega$ power inductors (10mm x 10mm x 4mm)<br>NEC/TOKIN MPC1040LR56 |
| N1, N6                                    | 2   | n-channel MOSFETs<br>Vishay/Siliconix Si7392DP (Power PAK)                                                                                                                                                |
| N3, N4, N8, N9                            | 4   | n-channel MOSFETs<br>Vishay/Siliconix Si7336ADP (Power PAK)                                                                                                                                               |
| R1, R8, R11, R17, R20, R25, R62, R63, R70 | 0   | Not installed (short PC trace) (0603)                                                                                                                                                                     |
| R2, R9                                    | 2   | 0.001 $\Omega$ $\pm$ 1%, 1W resistors (2512)<br>Panasonic ERJM1WTF1M0U                                                                                                                                    |
| R3, R107                                  | 2   | 100 $\Omega$ $\pm$ 5% resistors (0603)                                                                                                                                                                    |
| R4, R23                                   | 2   | 2k $\Omega$ $\pm$ 1% resistors (0603)                                                                                                                                                                     |
| R5, R6, R18, R24                          | 4   | 1k $\Omega$ $\pm$ 1% resistors (0603)                                                                                                                                                                     |
| R7                                        | 1   | 30.1k $\Omega$ $\pm$ 1% resistor (0603)                                                                                                                                                                   |
| R10                                       | 1   | 100k $\Omega$ $\pm$ 1% resistor (0603)                                                                                                                                                                    |
| R12                                       | 1   | 20k $\Omega$ $\pm$ 1% resistor (0603)                                                                                                                                                                     |
| R16, R83, R84                             | 3   | 10 $\Omega$ $\pm$ 5% resistors (0603)                                                                                                                                                                     |
| R22, R53, R61, R81                        | 0   | Not installed (0603)                                                                                                                                                                                      |
| R54–R59, R95, R96, R97                    | 9   | 100k $\Omega$ $\pm$ 5% resistors (0603)                                                                                                                                                                   |
| R60                                       | 1   | 11k $\Omega$ $\pm$ 1% resistor (0603)                                                                                                                                                                     |
| R82                                       | 1   | 1M $\Omega$ $\pm$ 5% resistor (0603)                                                                                                                                                                      |
| U1                                        | 1   | MAX8760ETL (40-pin TQFN)                                                                                                                                                                                  |
| U4                                        | 1   | MAX6509HAUK-T (5-pin SOT23)                                                                                                                                                                               |
| —                                         | 7   | Shunts                                                                                                                                                                                                    |
| —                                         | 1   | MAX8760 PC board                                                                                                                                                                                          |

# MAX8760 Evaluation Kit

## Quick Start

### Recommended Equipment

- 7V to 24V, > 100W power supply, battery, or notebook AC adapter
- DC bias power supply, 5V at 1A
- One or more dummy loads capable of sinking 30A total
- Digital multimeter (DMM)
- 100MHz dual-trace oscilloscope

### Procedure

Ensure that the circuit is connected correctly to the supplies and dummy load prior to applying any power:

- 1) Verify that the shunts are across JU2 pins 1 and 2 ( $\overline{\text{SHDN}}$ ) and JU4 pins 1 and 3 (TON). The DAC code settings (D5–D0) are set for 1.2000V output through installed jumpers JUA1, JUA2, and JUA3.
- 2) Turn on the battery power before turning on the +5V bias power; otherwise, the output UVLO timer times out and the FAULT latch is set, disabling the regulator until +5V power is cycled or  $\overline{\text{SHDN}}$  is toggled.
- 3) Observe the output voltage with the DMM and/or oscilloscope. Look at the LX switching nodes and MOSFET gate-drive signals while varying the load current.

## Detailed Description

This 30A multiphase buck-regulator design is optimized for a 300kHz frequency and 1.0V to 1.5V output voltage settings. At  $V_{\text{OUT}} = 1.2\text{V}$  and  $V_{\text{IN}} = 12\text{V}$ , the inductor ripple is approximately 30% (LIR = 0.3). The MAX8760 controller shares the current between its two phases that operate 180° out-of-phase, supplying 15A per phase.

### Setting the Output Voltage

On startup, the controller ramps the output to the preset DAC code from the D0–D5 input decoder when SUS = GND. The output voltage is digitally set by the D0–D5 pins (Table 2). There are two different methods of setting the output voltage:

- 1) Drive the external VID0–VID5 inputs (no jumpers installed). The output voltage can be set by driving VID0–VID5 with open-drain drivers (pullup resistors are included on the board) or 3V/5V CMOS output logic levels.
- 2) Install jumpers JUA0–JUA5: SUS = low. When JUA0–JUA5 are not installed, the MAX8760's D0–D5 inputs are at logic 1 (connected to VID\_VCC). When JUA0–JUA5 are installed, D0–D5 inputs are at logic 0 (connected to GND). The output voltage can be changed during operation by installing and removing jumpers JUA0–JUA5. As shipped, the EV kit is configured with jumpers JUA0–JUA5 set for 1.2000V output (Table 2). Refer to the MAX8760 data sheet for more information.

**Table 1. MAX8760 Operating Mode Truth**

| $\overline{\text{SHDN}}$ | $\overline{\text{SKIP}}$ | OUTPUT VOLTAGE | OPERATING MODE                                                                                                                                                                                                                                            |
|--------------------------|--------------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GND                      | X                        | GND            | Low-Power Shutdown Mode. DL <sub>-</sub> is forced high, DH <sub>-</sub> is forced low, and the PWM controller is disabled. The supply current drops to 1μA (typ).                                                                                        |
| VCC                      | REF                      | D0–D5          | Dual-Phase Pulse-Skipping Operation. When $\overline{\text{SKIP}}$ is set to 2V, the MAX8760 immediately enters dual-phase pulse-skipping operation allowing automatic PWM/PFM switchover under light loads. The VROK upper threshold is blanked.         |
| VCC                      | GND                      | D0–D5          | Single-Phase Pulse-Skipping Operation. When $\overline{\text{SKIP}}$ is pulled to GND, the MAX8760 immediately enters single-phase pulse-skipping operation allowing automatic PWM/PFM switchover under light loads. The VROK upper threshold is blanked. |
| VCC                      | X                        | GND            | Fault Mode. The fault latch has been set either by UVP, OVP, or thermal shutdown. The controller remains in FAULT mode until VCC power is cycled or $\overline{\text{SHDN}}$ is toggled.                                                                  |

# MAX8760 Evaluation Kit

## Reduced Power Dissipation Voltage Positioning

The MAX8760 EV kit uses voltage positioning to decrease the size of the output capacitor and to reduce power dissipation at heavy loads. Current-sense resistors ( $R2$  and  $R9 = 1\text{m}\Omega$ ) are used to sense the inductor current and adjust the output voltage. The current-sense resistors dissipate some power but the net power savings are substantial. This EV kit further improves efficiency by using an internal op-amp gain stage to allow a reduction in the sense-resistor value.

The MAX8760 op amp is configured for a gain of 3 providing a  $-2\text{mV/A}$  voltage-positioning slope at the output. Remote output and ground sensing eliminates any additional PC board voltage drops.

On startup, the controller ramps the output to the preset DAC code from the D0–D5 input decoder when  $\text{SUS} = \text{GND}$ . The output voltage is digitally set by the D0–D5 pins (Table 2).

## Dynamic Output-Voltage Transitions

This EV kit is set to transition the output voltage at 1 LSB per  $2\mu\text{s}$ . The transition rate can be altered by changing resistor  $R7$  ( $30.1\text{k}\Omega$ ).

During the voltage transition, watch the inductor current by looking across  $R2$  and/or  $R9$  with a differential scope probe or by inserting a current probe in series with the inductor. Observe the low, well-controlled inductor current that accompanies the voltage transition. Slew-rate control during shutdown and startup results in well-controlled currents into and out of the battery (input source).

There are two other methods to create an output-voltage transition. Select D0–D5 (JUA0–JUA5). Then either manually change the JUA0–JUA5 jumpers to a new VID code setting (Table 2), or remove all jumpers and drive the VID0–VID5 PC board test points externally to the desired code settings.

**Table 2. MAX8760 Output-Voltage Adjustment Settings ( $\text{SUS} = \text{GND}$ )**

| D5<br>JUA5 | D4<br>JUA4 | D3<br>JUA3 | D2<br>JUA2 | D1<br>JUA1 | D0<br>JUA0 | V <sub>OUT</sub><br>(V) |  | D5<br>JUA5 | D4<br>JUA4 | D3<br>JUA3 | D2<br>JUA2 | D1<br>JUA1 | D0<br>JUA0 | V <sub>OUT</sub><br>(V) |
|------------|------------|------------|------------|------------|------------|-------------------------|--|------------|------------|------------|------------|------------|------------|-------------------------|
| 0          | 0          | 0          | 0          | 0          | 0          | 1.5500                  |  | 1          | 0          | 0          | 0          | 0          | 0          | 0.7625                  |
| 0          | 0          | 0          | 0          | 0          | 1          | 1.5250                  |  | 1          | 0          | 0          | 0          | 0          | 1          | 0.7500                  |
| 0          | 0          | 0          | 0          | 1          | 0          | 1.5000                  |  | 1          | 0          | 0          | 0          | 1          | 0          | 0.7375                  |
| 0          | 0          | 0          | 0          | 1          | 1          | 1.4750                  |  | 1          | 0          | 0          | 0          | 1          | 1          | 0.7250                  |
| 0          | 0          | 0          | 1          | 0          | 0          | 1.4500                  |  | 1          | 0          | 0          | 1          | 0          | 0          | 0.7125                  |
| 0          | 0          | 0          | 1          | 0          | 1          | 1.4250                  |  | 1          | 0          | 0          | 1          | 0          | 1          | 0.7000                  |
| 0          | 0          | 0          | 1          | 1          | 0          | 1.4000                  |  | 1          | 0          | 0          | 1          | 1          | 0          | 0.6875                  |
| 0          | 0          | 0          | 1          | 1          | 1          | 1.3750                  |  | 1          | 0          | 0          | 1          | 1          | 1          | 0.6750                  |
| 0          | 0          | 1          | 0          | 0          | 0          | 1.3500                  |  | 1          | 0          | 1          | 0          | 0          | 0          | 0.6625                  |
| 0          | 0          | 1          | 0          | 0          | 1          | 1.3250                  |  | 1          | 0          | 1          | 0          | 0          | 1          | 0.6500                  |
| 0          | 0          | 1          | 0          | 1          | 0          | 1.3000                  |  | 1          | 0          | 1          | 0          | 1          | 0          | 0.6375                  |
| 0          | 0          | 1          | 0          | 1          | 1          | 1.2750                  |  | 1          | 0          | 1          | 0          | 1          | 1          | 0.6250                  |
| 0          | 0          | 1          | 1          | 0          | 0          | 1.2500                  |  | 1          | 0          | 1          | 1          | 0          | 0          | 0.6125                  |
| 0          | 0          | 1          | 1          | 0          | 1          | 1.2250                  |  | 1          | 0          | 1          | 1          | 0          | 1          | 0.6000                  |
| 0          | 0          | 1          | 1          | 1          | 0          | 1.2000                  |  | 1          | 0          | 1          | 1          | 1          | 0          | 0.5875                  |

# MAX8760 Evaluation Kit

Evaluates: MAX8760

Table 2. MAX8760 Output-Voltage Adjustment Settings (SUS = GND) (continued)

| D5<br>JUA5 | D4<br>JUA4 | D3<br>JUA3 | D2<br>JUA2 | D1<br>JUA1 | D0<br>JUA0 | V <sub>OUT</sub><br>(V) |  | D5<br>JUA5 | D4<br>JUA4 | D3<br>JUA3 | D2<br>JUA2 | D1<br>JUA1 | D0<br>JUA0 | V <sub>OUT</sub><br>(V) |
|------------|------------|------------|------------|------------|------------|-------------------------|--|------------|------------|------------|------------|------------|------------|-------------------------|
| 0          | 0          | 1          | 1          | 1          | 1          | 1.1750                  |  | 1          | 0          | 1          | 1          | 1          | 1          | 0.5750                  |
| 0          | 1          | 0          | 0          | 0          | 0          | 1.1500                  |  | 1          | 1          | 0          | 0          | 0          | 0          | 0.5625                  |
| 0          | 1          | 0          | 0          | 0          | 1          | 1.1250                  |  | 1          | 1          | 0          | 0          | 0          | 1          | 0.5500                  |
| 0          | 1          | 0          | 0          | 1          | 0          | 1.1000                  |  | 1          | 1          | 0          | 0          | 1          | 0          | 0.5375                  |
| 0          | 1          | 0          | 0          | 1          | 1          | 1.0750                  |  | 1          | 1          | 0          | 0          | 1          | 1          | 0.5250                  |
| 0          | 1          | 0          | 1          | 0          | 0          | 1.0500                  |  | 1          | 1          | 0          | 1          | 0          | 0          | 0.5125                  |
| 0          | 1          | 0          | 1          | 0          | 1          | 1.0250                  |  | 1          | 1          | 0          | 1          | 0          | 1          | 0.5000                  |
| 0          | 1          | 0          | 1          | 1          | 0          | 1.0000                  |  | 1          | 1          | 0          | 1          | 1          | 0          | 0.4875                  |
| 0          | 1          | 0          | 1          | 1          | 1          | 0.9750                  |  | 1          | 1          | 0          | 1          | 1          | 1          | 0.4750                  |
| 0          | 1          | 1          | 0          | 0          | 0          | 0.9500                  |  | 1          | 1          | 1          | 0          | 0          | 0          | 0.4625                  |
| 0          | 1          | 1          | 0          | 0          | 1          | 0.9250                  |  | 1          | 1          | 1          | 0          | 0          | 1          | 0.4500                  |
| 0          | 1          | 1          | 0          | 1          | 0          | 0.9000                  |  | 1          | 1          | 1          | 0          | 1          | 0          | 0.4375                  |
| 0          | 1          | 1          | 0          | 1          | 1          | 0.8750                  |  | 1          | 1          | 1          | 0          | 1          | 1          | 0.4250                  |
| 0          | 1          | 1          | 1          | 0          | 0          | 0.8500                  |  | 1          | 1          | 1          | 1          | 0          | 0          | 0.4125                  |
| 0          | 1          | 1          | 1          | 0          | 1          | 0.8250                  |  | 1          | 1          | 1          | 1          | 0          | 1          | 0.4000                  |
| 0          | 1          | 1          | 1          | 1          | 0          | 0.8000                  |  | 1          | 1          | 1          | 1          | 1          | 0          | 0.3875                  |
| 0          | 1          | 1          | 1          | 1          | 1          | 0.7750                  |  | 1          | 1          | 1          | 1          | 1          | 1          | 0.3750                  |

## TON Settings


Jumper JU4 selects the MAX8760 switching frequency.

**Note:** When changing the switching frequency, recalculate the inductor and output capacitor values using the equations in the MAX8760 data sheet.

Table 3. Jumper JU4 Function (TON Setting)

| SHUNT POSITION    | TON PIN                      | MAX8760 SWITCHING FREQUENCY (kHz) |
|-------------------|------------------------------|-----------------------------------|
| 1 and 2           | Connected to GND             | 550                               |
| 1 and 3 (default) | Connected to REF             | 300                               |
| 1 and 4           | Connected to V <sub>CC</sub> | 200                               |
| Not installed     | Open                         | 100                               |

# MAX8760 Evaluation Kit

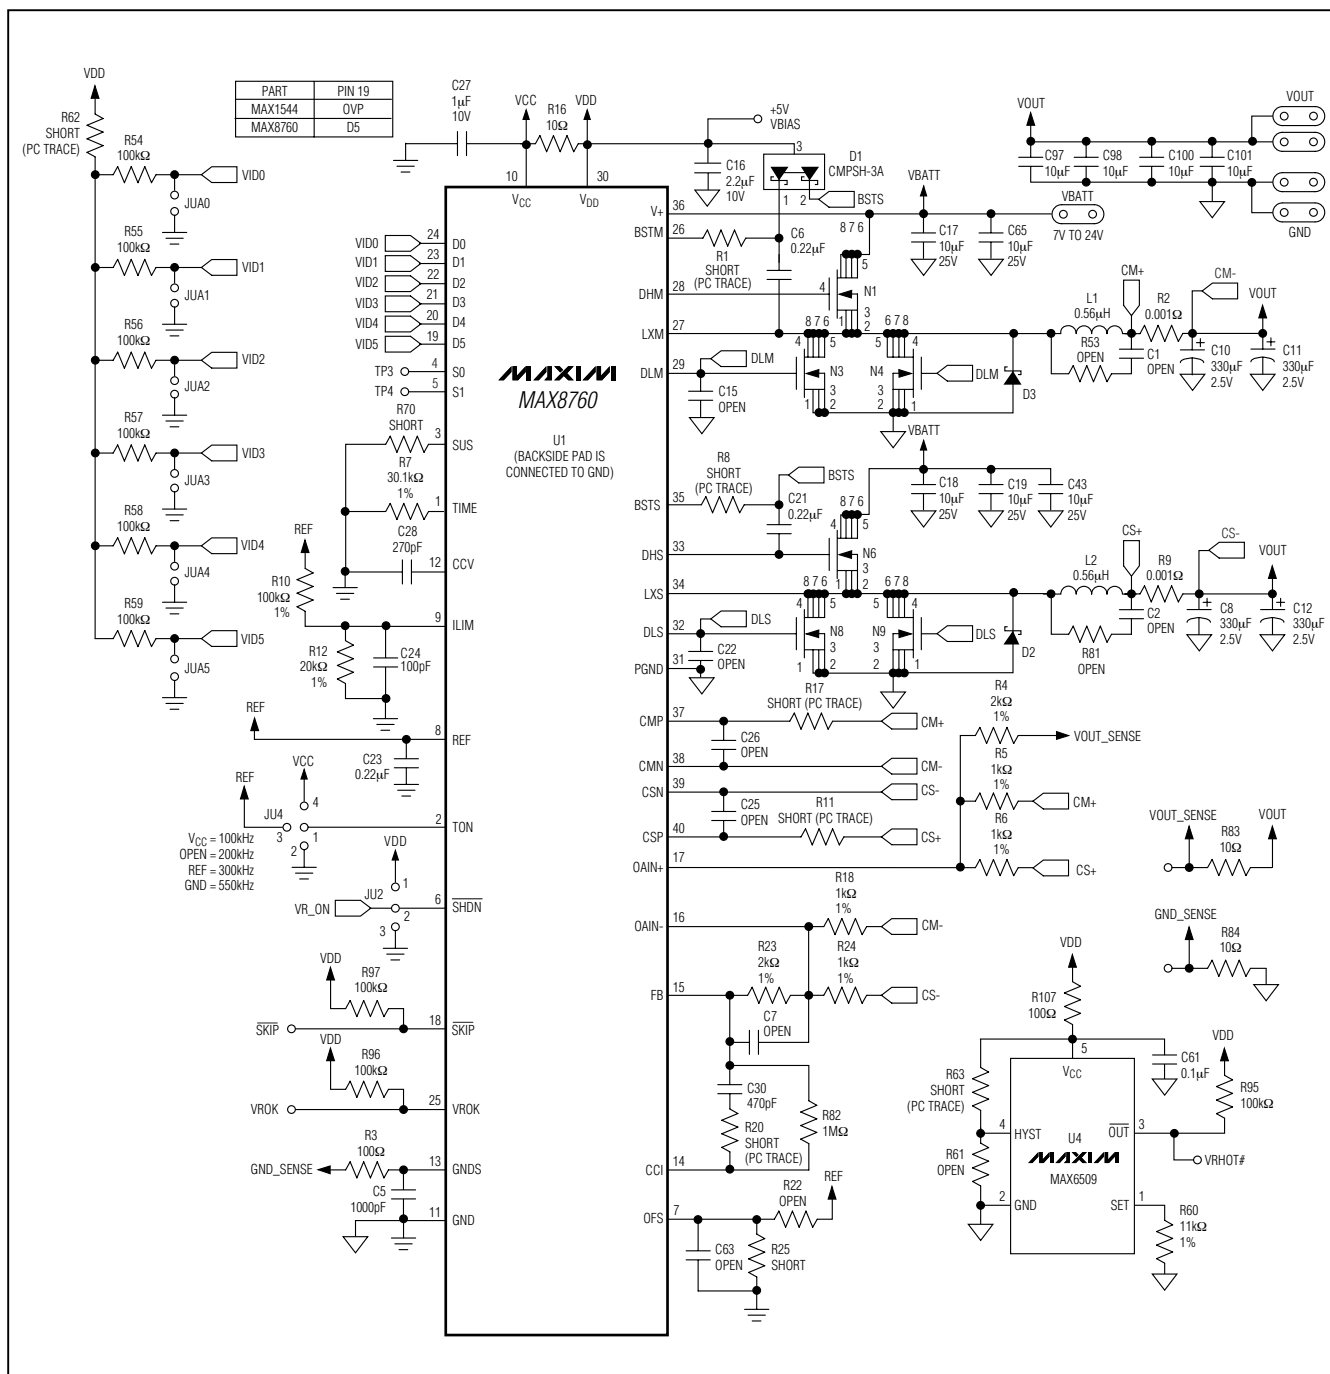

# MAX8760 Evaluation Kit

Evaluates: MAX8760

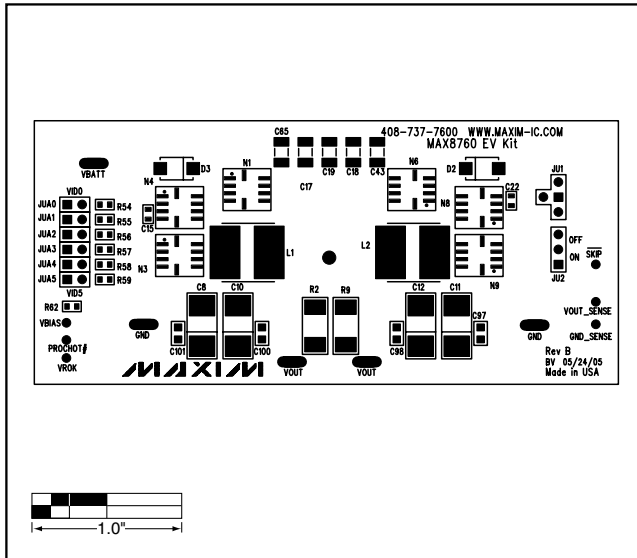


Figure 2. MAX8760 EV Kit Component Placement Guide—Component Side

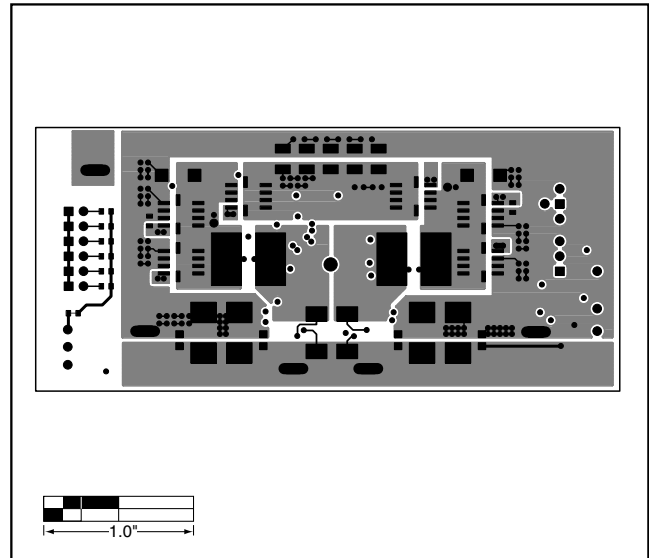


Figure 3. MAX8760 EV Kit PC Board Layout—Component Side

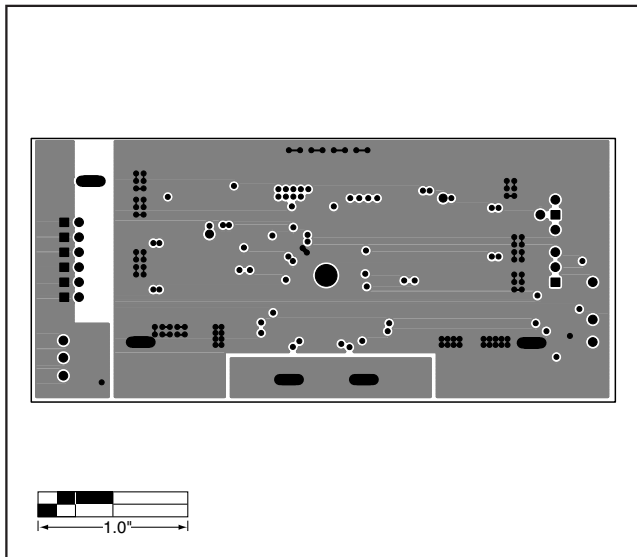


Figure 4. MAX8760 EV Kit PC Board Layout—Internal Layer 2—VOUT/GND Plane

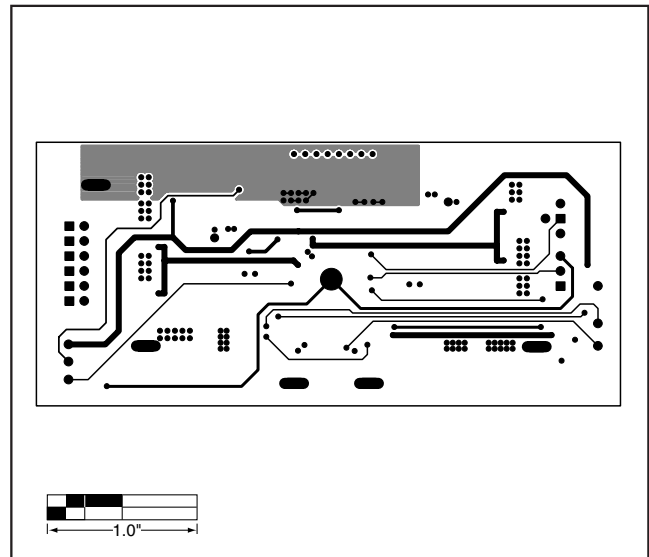


Figure 5. MAX8760 EV Kit PC Board Layout—Internal Layer 3—Signal Layer

# MAX8760 Evaluation Kit

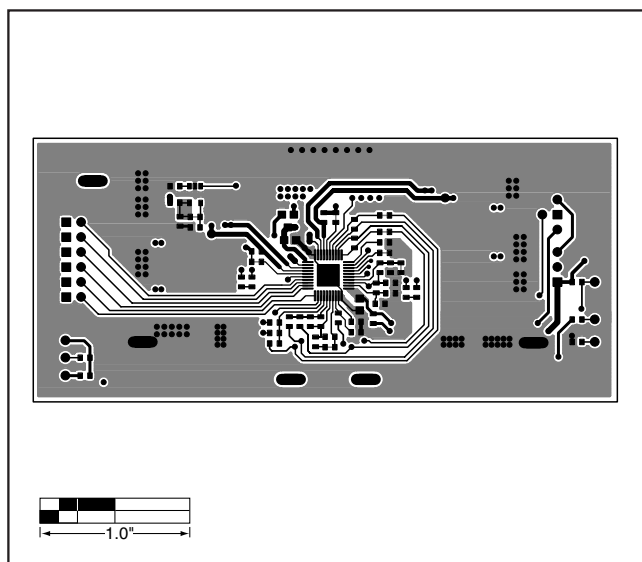


Figure 6. MAX8760 EV Kit PC Board Layout—Solder Side

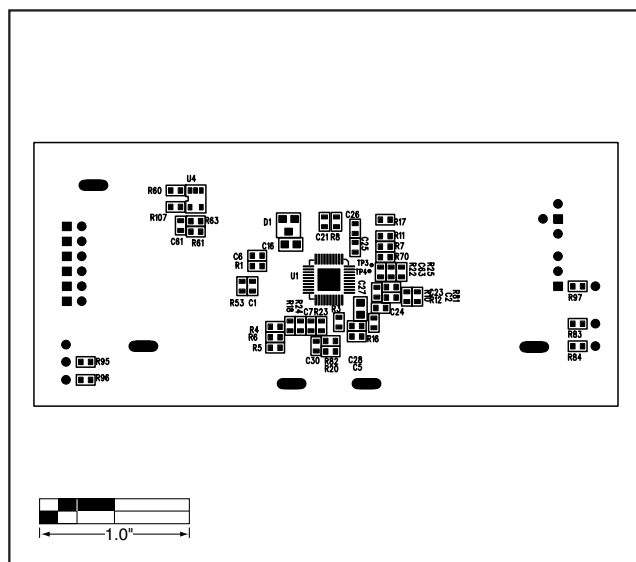


Figure 7. MAX8760 EV Kit Component Placement Guide—Solder Side

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.