



# COAXIAL CABLE SYSTEMS

## COAXIAL CABLES


NON-PLENUM  
RoHS COMPLIANT




Alpha Part No.: **9055B**




Alpha Part Nos.: **9058AC, 9058A**

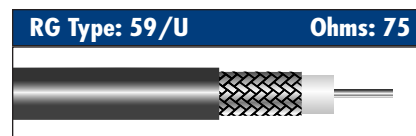


Alpha Part Nos.: **9059C, 9059**

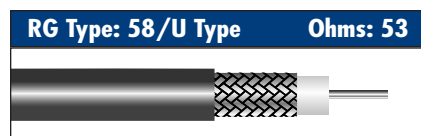


Alpha Part Nos.: **9058X, 9058**

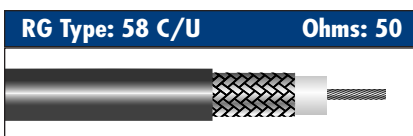


Alpha Part No.: **9058C**

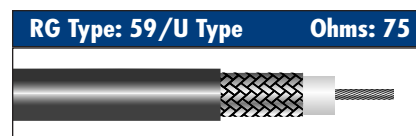


Alpha Part No.: **9803C**

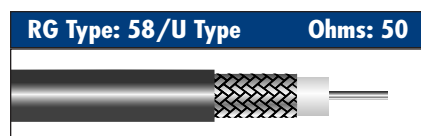

Alpha Part No.: **9848**

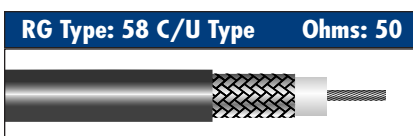

Alpha Part No.: **9858**

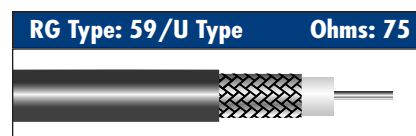

Alpha Part No.: **9830**

## PRODUCT DESCRIPTION

Alpha Part No. Type	Inner Conductor			Dielectric		Shield		Jacket		UL Style No.	VP %	Capacitance pF/ft (pF/m)	Specifications
	AWG (mm <sup>2</sup> )	Strand (mm)	Mat'l.♦	Mat'l.♦	Diameter In. (mm)	Mat'l.♦	Nom. Cov., %	Mat'l.♦	Diameter In. (mm)				
<b>9055B</b> <b>55 B/U</b>	20 (0,52)	Solid	SC	PE	0.116 (2,95)	Double TC Braid	99	Black PE	0.206 (5,23)	—	66	28.8 (94,5)	—
<b>9058X</b> <b>58/U</b>	20 (0,52)	Solid	BC	PE	0.116 (2,95)	TC Braid	81	Black V	0.195 (4,95)	1354	66	28.8 (94,5)	UL Standard 13, Type CL2
<b>9058</b> <b>58/U</b>	20 (0,52)	Solid	BC	PE	0.116 (2,95)	TC Braid	81	Black V	0.195 (4,95)	1354	66	28.8 (94,5)	—
<b>9848</b> <b>58/U</b>	18 (0,82)	Solid	BC	FPE	0.116 (2,95)	TC Braid	93	Black V	0.195 (4,95)	1354	78	26 (85,3)	—
<b>9058AC</b> <b>58 A/U</b>	20 (0,48)	19/0.0071 (19 x 0,18)	TC	PE	0.116 (2,95)	TC Braid	95	Black V	0.195 (4,95)	—	66	30.5 (100,0)	UL Standard 13, Type CL2
<b>9058A</b> <b>58 A/U</b>	20 (0,48)	19/0.0071 (19 x 0,18)	TC	PE	0.116 (2,95)	TC Braid	95	Black V	0.195 (4,95)	—	66	30.5 (100,0)	JAN-C-17A
<b>9058C</b> <b>58 C/U</b>	20 (0,48)	19/0.0071 (19 x 0,18)	TC	PE	0.116 (2,95)	TC Braid	95	Black NCV	0.195 (4,95)	—	66	30.5 (100,0)	MIL-C-17D Type
<b>9858</b> <b>58 C/U</b>	20 (0,48)	19/0.0071 (19 x 0,18)	TC	PE	0.116 (2,95)	TC Braid	95	Black V	0.193 (4,90)	1354	66	30.8 (101,5)	UL Standard 13, Type CL2
<b>9059C</b> <b>59/U</b>	22 (0,32)	Solid	CW	PE	0.146 (3,71)	BC Braid	95	Black, Red, Green, Blue and Gray V	0.242 (6,15)	1354	66	21.4 (70,2)	UL Standard 13, Type CL2
<b>9059</b> <b>59/U</b>	22 (0,32)	Solid	CW	PE	0.146 (3,71)	BC Braid	95	White, Gray or Black V	0.242 (6,15)	1354	66	21.4 (70,2)	JAN-C-17A
<b>9803C</b> <b>59/U</b>	22 (0,32)	7/30 (7 x 0,25)	BC	FPE	0.146 (3,71)	BC Braid	95	Black V	0.242 (6,15)	1354	78	17.3 (56,8)	UL Standard 13, Type CL2
<b>9830</b> <b>59/U</b>	22 (0,32)	Solid	CW	PE	0.146 (3,71)	BC Braid	80	Black V	0.242 (6,15)	1354	66	21.6 (70,8)	—


♦Refer to Materials Abbreviation Guide on Page 283  
See pages 284, 285 and the Local Area Network Section for plenum-rated coax.

## ATTENUATION LEVELS

■ See Chart on Page 288

## SPECIFICATIONS

■ RoHS Compliant



## AVAILABILITY

■ See Page 287 for available put-ups

Web Site: [www.alphawire.com](http://www.alphawire.com)  
Email: [info@alphawire.com](mailto:info@alphawire.com)

Toll Free: 1-800-52 ALPHA • Telephone: 908-925-8000 • Fax: 908-925-6923  
Europe/UK Telephone: +44 (0) 1932 772422 • Europe/UK Fax: +44 (0) 1932 772433

