



# E SERIES

## 3000VDC SINGLE AND DUAL OUTPUT DC-DC CONVERTER

### FEATURES

- 7 PIN SIP PACKAGE.
- 3000VDC ISOLATION.
- UNREGULATED OUTPUT TYPES.
- UL 94V-0 PACKAGE MATERIAL.

### GENERAL SPECIFICATIONS

- OUTPUT RIPPPL(20MHz Band limited) : 150mVp-p MAX
- ISOLATION RESISTANCE : 1000MΩ MIN @500VDC
- SWITHINGFREQUENCY : 100KHz TYP.
- OPERATING TEMPERATURE : 0 °C TO 70°C
- EFFICIENCY : 70% TYP
- ISOLATION VOLTAGE : 3000 VDC

### ELECTRICAL SPECIFICATIONS

- INPUT VOLTAGE RANGE : ±5%
- OUTPUT VOLTAGE TOLERANCE : ±5%
- LINE REGULATION(10% TO 100% F.L.) : 1.2%/1% OF Vin
- LOAD REGULATION(10% TO 100% F.L.) : 15% MAX  
5V OUTPUT TYPES : 10% MAX  
9V,12V AND 15V OUTPUT TYPES



#### 5V,12V AND 24V INPUT TYPES

PART NUMBER	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (mA)	EFFICIENCY (% TYP.)	PACKAGE STYLE
EXX05S-1W	±5	±200	70	2
EXX09S-1W	±9	±112	75	2
EXX12S-1W	±12	±84	75	2
EXX15S-1W	±15	±68	75	2

#### 48V INPUT TYPES

PART NUMBER	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (mA)	EFFICIENCY (% TYP.)	PACKAGE STYLE
E4805S-1W	±5	±200	70	2
E4809S-1W	±9	±112	75	2
E4812S-1W	±12	±84	75	2
E4815S-1W	±15	±68	75	2

### MARKINGS AND DIMENSIONS

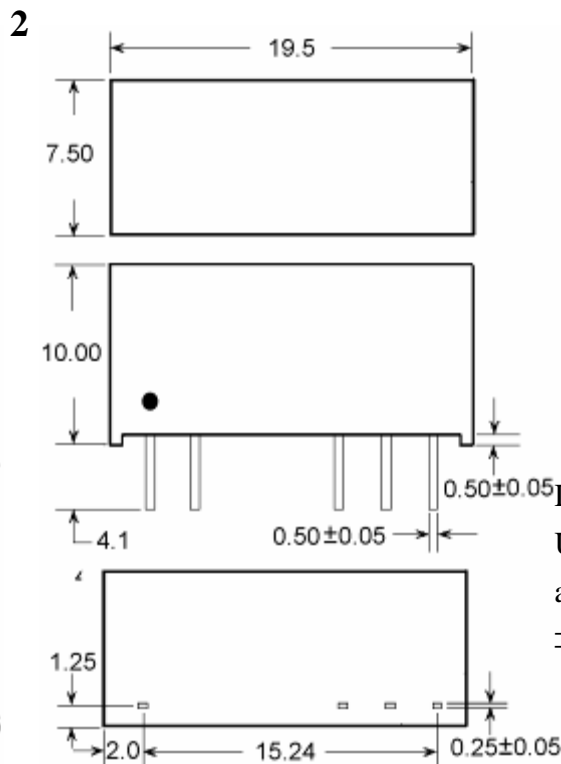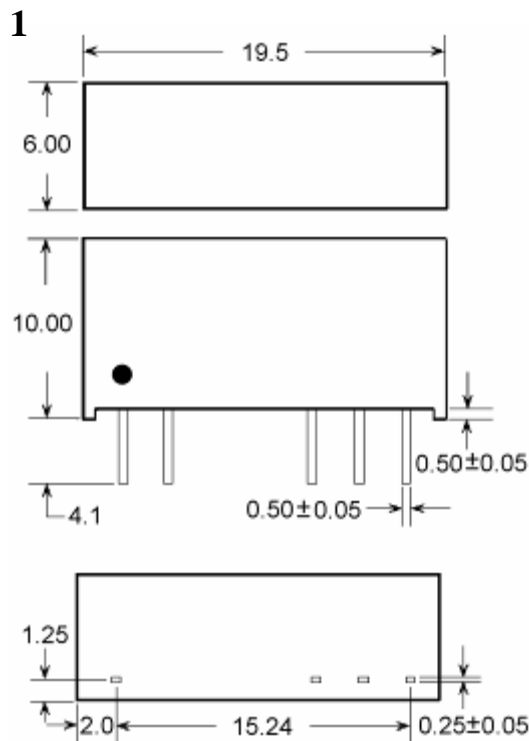

### PIN CONNECTION

PIN	SINGLE
1	+INPUT
2	-INPUT
5	-OUTPUT
6	COM
7	+OUTPUT

Dimensions: inches/mm  
Unless otherwise specified,  
all tolerances are ±.005/±0.13