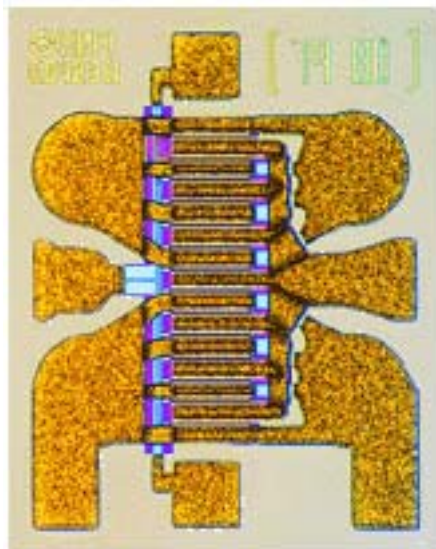


DC - 12 GHz Discrete HFET**TGF4230-SCC****Key Features and Performance**

- Nominal Pout of 28.5 dBm at 8.5 GHz
- Nominal Gain of 10.0 dB at 8.5 GHz
- Nominal PAE of 55 % at 8.5 GHz
- 1200 μ m HFET
- 0.61 x 0.74 x 0.1 mm (0.024 x 0.029 x 0.004 in)
- Bias at 8 Volts, 96 mA

Primary Applications

- Cellular Base Stations
- High dynamic-range LNAs
- Military and Space

Description

The TriQuint TGF4230-SCC is a single gate 1.2 mm Discrete GaAs Heterostructure Field Effect Transistor (HFET) designed for high-efficiency power applications up to 12 GHz in Class A and Class AB operation.

Bond-pad and backside metalization is gold plated for compatibility with eutectic alloy attach methods as well as thermocompression and thermosonic wire-bonding processes. The TGF4230-SCC is readily assembled using automatic equipment.

For an Application Note on the use of HFETs, refer to the TriQuint website for the Millimeter Wave Division.

TABLE I
MAXIMUM RATINGS

| SYMBOL | PARAMETER <u>1/</u> | VALUE | NOTES |
|---------------|-----------------------------------|------------------|-----------------------|
| V_{DS} | Drain to Source Voltage | 12 V | |
| V_{GS} | Gate to Source Voltage Range | 0 to -5.0 Volts | |
| P_D | Power Dissipation | See Thermal Data | |
| T_{CH} | Operating Channel Temperature | 150°C | <u>2/</u> , <u>3/</u> |
| T_{STG} | Storage Temperature | -65 to 150°C | |
| T_M | Mounting Temperature (30 seconds) | 320°C | |

1/ These ratings represent the maximum values for this device. Stresses beyond those listed under “Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “DC Probe Characteristics” and “Electrical Characteristics” is not implied. Exposure to maximum rated conditions for extended periods may affect device reliability.

2/ Junction temperature will directly affect the device Mean Time to Failure (MTTF). For maximum life, it is recommended that junction temperatures be maintained at the lowest possible levels.

3/ These ratings apply to each individual FET

TABLE II
DC PROBE CHARACTERISTICS
($T_A = 25\text{ }^\circ\text{C}$, Nominal)

| Symbol | Parameter | Minimum | Typical | Maximum | Unit | Note |
|-----------|----------------------------------|---------|---------|---------|------|------|
| I_{DSS} | Saturated Drain Current | -- | 294 | -- | mA | 1/ |
| G_M | Transconductance | -- | 198 | -- | mS | 1/ |
| V_P | Pinch-off Voltage | 1 | 1.85 | 3 | V | 2/ |
| V_{BGS} | Breakdown Voltage Gate-Source | 17 | 22 | 30 | V | 2/ |
| V_{BGD} | Breakdown Voltage Gate-Drain | 17 | 22 | 30 | V | 2/ |

1/ Total for two FETS

2/ V_P , V_{BGS} , and V_{BGD} are negative.


TABLE III
ELECTRICAL CHARACTERISTICS
($T_A = 25\text{ }^\circ\text{C}$, Nominal)
Bias Conditions: $V_d = 8\text{ V}$, $I_d = 50\text{ mA} \pm 10\%$, @ 8.5 GHz

| Symbol | Parameter | Typical | Unit |
|-----------|------------------------|---------|------|
| P_{out} | Output Power | 28.5 | dBm |
| G_p | Power Gain | 10 | dB |
| PAE | Power Added Efficiency | 55 | % |


Note: The recommended bias current for HFETs is 80 mA/mm. For this 1.2 mm HFET IQ is 96 mA.

TYPICAL PERFORMANCE


**EXAMPLE OF
DC I-V CURVES**

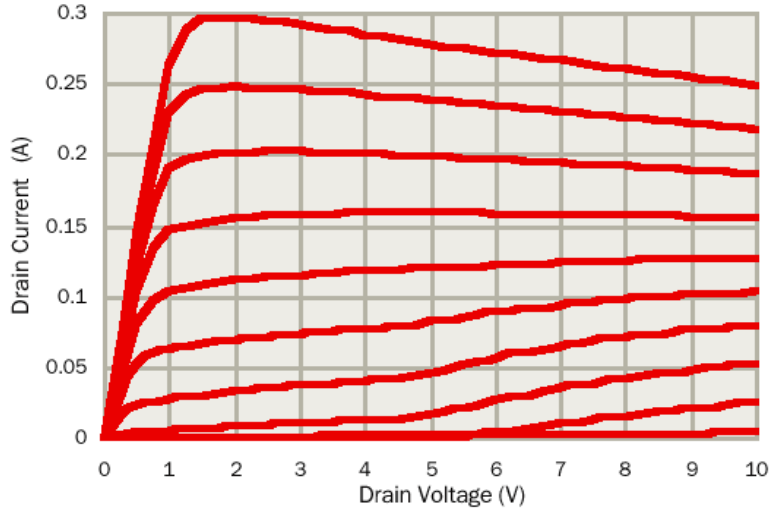

**OUTPUT POWER VS.
INPUT POWER**

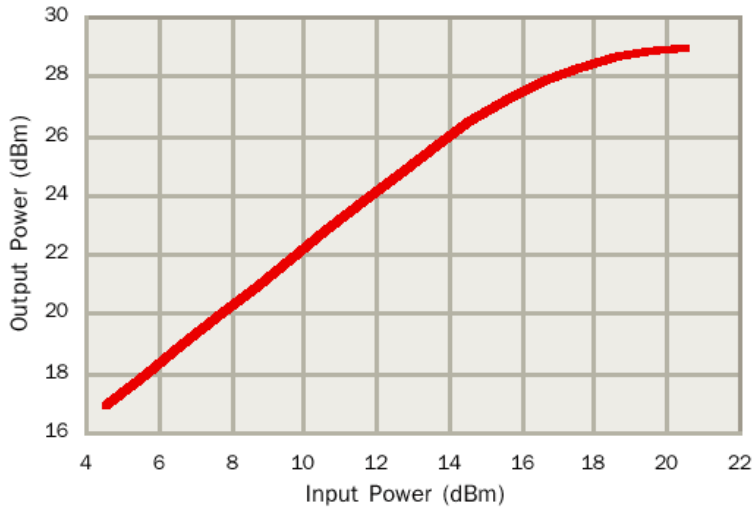


**POWER ADDED
EFFICIENCY VS.
INPUT POWER**

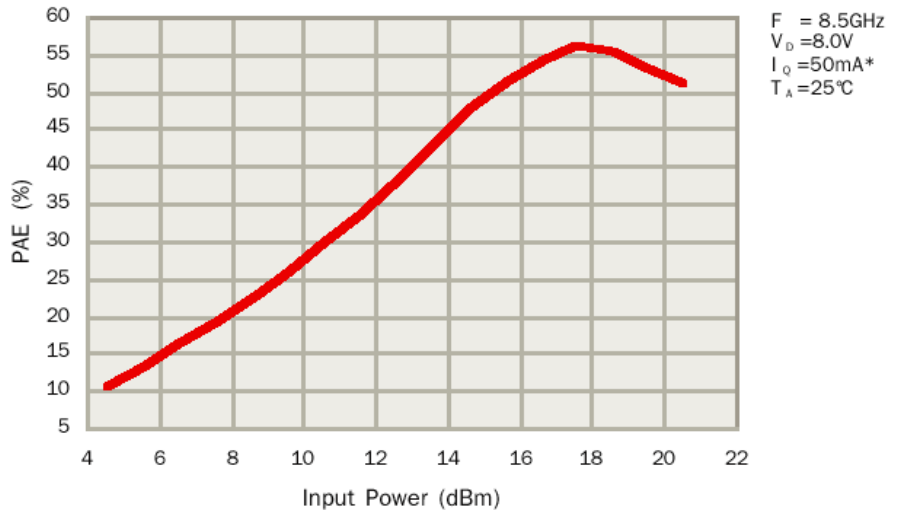


TYPICAL PERFORMANCE

GAIN VS. INPUT POWER

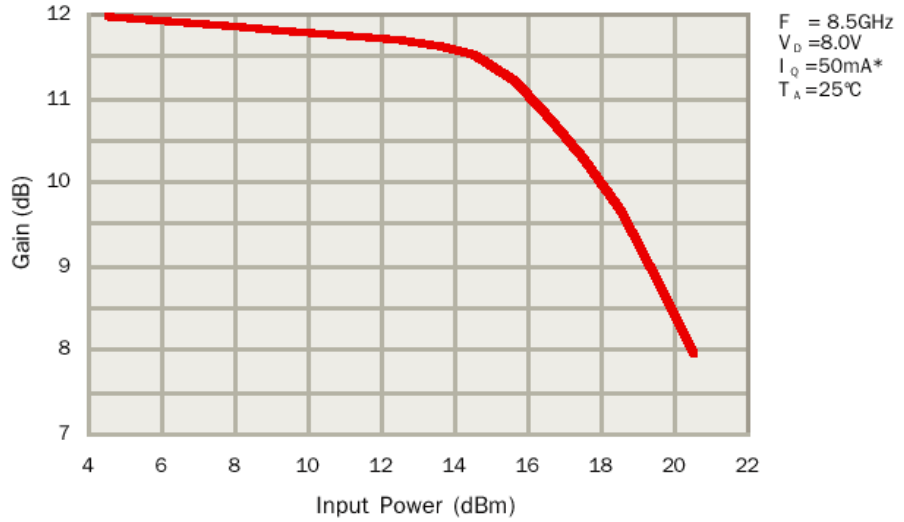


DRAIN CURRENT VS. INPUT POWER

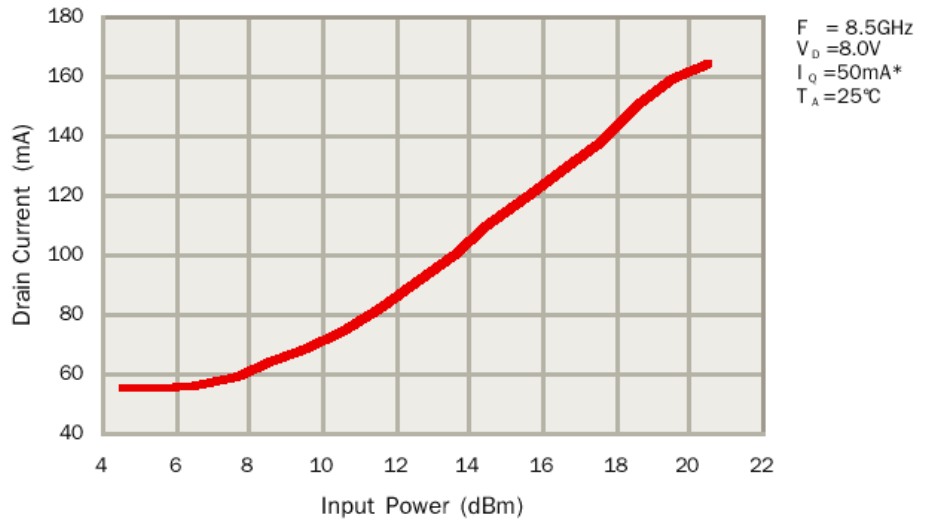

* Note: I_Q is defined as the drain current before application of RF signal at the input.


THERMAL INFORMATION

PREDICTED CHANNEL TEMPERATURE VS. BASE TEMPERATURE at 0.51 W and 1.02 W dissipated power

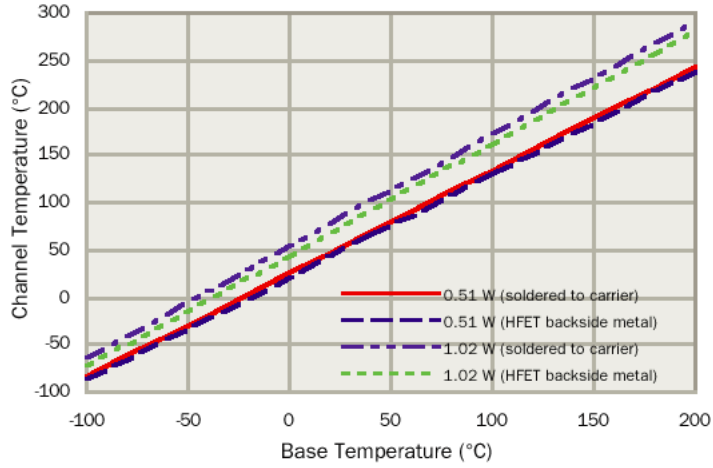

Case 1: Base temperature at backside of carrier (with 38 μm AuSn solder attach to 0.5 mm CuMo Carrier)
 Case 2: Base temperature at backside of 1.2 mm HFET.

HFET CHANNEL TEMPERATURE VS. MEDIAN LIFE

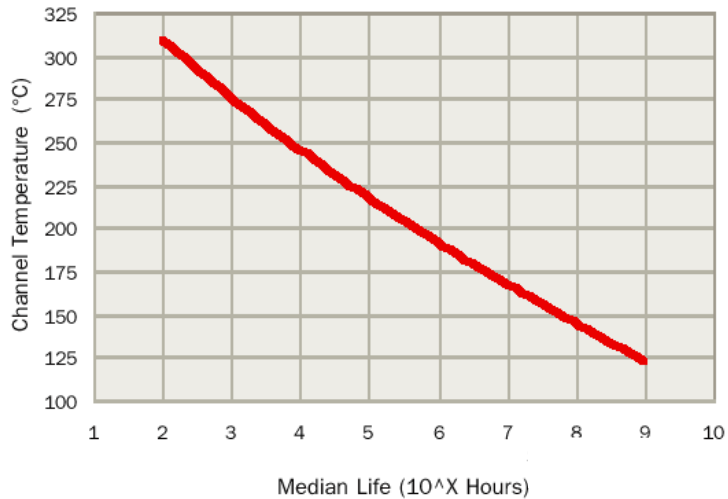


MODELED S-PARAMETERS

| Frequency (GHz) | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|-----------------|-----------------|---------|-----------------|--------|-----------------|--------|-----------------|---------|
| | MAG | ANG(°) | MAG | ANG(°) | MAG | ANG(°) | MAG | ANG(°) |
| 0.5 | 0.985 | -29.88 | 8.095 | 161.49 | 0.021 | 72.66 | 0.343 | -22.22 |
| 1.0 | 0.959 | -56.20 | 7.297 | 145.18 | 0.038 | 58.80 | 0.328 | -41.75 |
| 1.5 | 0.931 | -77.47 | 6.368 | 131.86 | 0.050 | 47.65 | 0.312 | -57.46 |
| 2.0 | 0.908 | -94.02 | 5.512 | 121.22 | 0.057 | 39.12 | 0.301 | -69.57 |
| 2.5 | 0.891 | -106.82 | 4.791 | 112.62 | 0.062 | 32.60 | 0.295 | -78.80 |
| 3.0 | 0.880 | -116.82 | 4.202 | 105.49 | 0.065 | 27.55 | 0.294 | -85.89 |
| 3.5 | 0.871 | -124.76 | 3.723 | 99.42 | 0.067 | 23.56 | 0.297 | -91.41 |
| 4.0 | 0.865 | -131.19 | 3.330 | 94.11 | 0.068 | 20.34 | 0.302 | -95.80 |
| 4.5 | 0.861 | -136.48 | 3.004 | 89.37 | 0.069 | 17.70 | 0.309 | -99.38 |
| 5.0 | 0.858 | -140.92 | 2.732 | 85.06 | 0.069 | 15.51 | 0.319 | -102.37 |
| 5.5 | 0.856 | -144.69 | 2.501 | 81.09 | 0.069 | 13.67 | 0.329 | -104.94 |
| 6.0 | 0.855 | -147.94 | 2.304 | 77.39 | 0.068 | 12.12 | 0.340 | -107.18 |
| 6.5 | 0.854 | -150.78 | 2.133 | 73.90 | 0.068 | 10.82 | 0.352 | -109.19 |
| 7.0 | 0.854 | -153.29 | 1.984 | 70.59 | 0.067 | 9.72 | 0.364 | -111.03 |
| 7.5 | 0.854 | -155.53 | 1.852 | 67.43 | 0.066 | 8.80 | 0.377 | -112.73 |
| 8.0 | 0.855 | -157.54 | 1.736 | 64.40 | 0.065 | 8.05 | 0.390 | -114.32 |
| 8.5 | 0.855 | -159.37 | 1.632 | 61.49 | 0.065 | 7.45 | 0.404 | -115.84 |
| 9.0 | 0.856 | -161.04 | 1.539 | 58.67 | 0.064 | 7.00 | 0.417 | -117.29 |
| 9.5 | 0.857 | -162.58 | 1.455 | 55.95 | 0.063 | 6.68 | 0.430 | -118.68 |
| 10.0 | 0.858 | -164.01 | 1.378 | 53.30 | 0.061 | 6.49 | 0.444 | -120.03 |
| 10.5 | 0.859 | -165.34 | 1.308 | 50.73 | 0.060 | 6.43 | 0.457 | -121.35 |
| 11.0 | 0.860 | -166.58 | 1.244 | 48.23 | 0.059 | 6.51 | 0.470 | -122.63 |
| 11.5 | 0.862 | -167.76 | 1.186 | 45.79 | 0.058 | 6.71 | 0.483 | -123.89 |
| 12.0 | 0.863 | -168.87 | 1.131 | 43.41 | 0.057 | 7.05 | 0.496 | -125.11 |
| 12.5 | 0.864 | -169.93 | 1.081 | 41.09 | 0.056 | 7.52 | 0.509 | -126.32 |
| 13.0 | 0.866 | -170.94 | 1.034 | 38.83 | 0.055 | 8.12 | 0.521 | -127.51 |
| 13.5 | 0.867 | -171.91 | 0.991 | 36.62 | 0.053 | 8.86 | 0.534 | -128.68 |
| 14.0 | 0.869 | -172.84 | 0.950 | 34.46 | 0.052 | 9.74 | 0.546 | -129.82 |

V_{DS} = 8.0 V and 30% I_{DSS} at T = 25°C

LINEAR MODEL

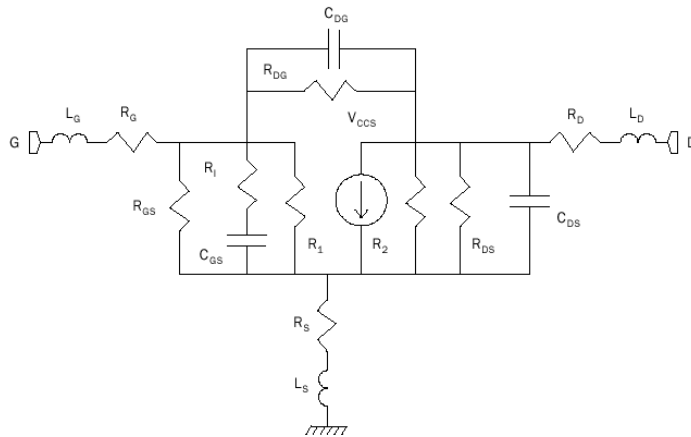

V_{DS} = 8.0 V and 30% I_{DSS} at T = 25°C

FET Elements

L_G = 0.0421nH
R_G = 0.43 Ω
R_{GS} = 81700 Ω
R₁ = 1.21Ω
C_{GS} = 1.21 pF
C_{DG} = 0.1004 pF


V_{DS} = 8.0 V and 30% I_{DSS} at T = 25°C

R_{DG} = 204000 Ω
R_S = 0.4 Ω
L_S = 0.015 nH
R_{DS} = 98.01 Ω
C_{DS} = 0.25325 pF
R_D = 0.66 Ω
L_D = 0.022 nH

VCCS Parameters

M = 132.9 mS
A = 0
R1 = 1E19 Ω
R2 = 1E19 Ω
F = 0
T = 5.49 pS

Mechanical Drawing

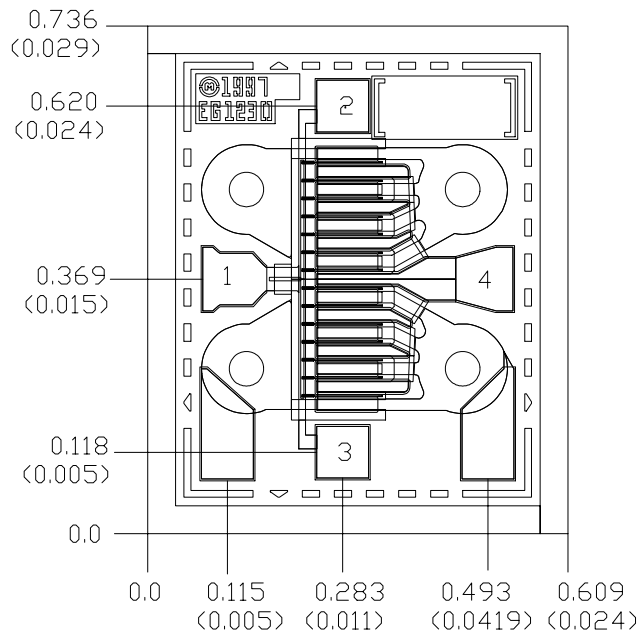

Units: millimeters (inches)
Thickness: 0.100 (0.004)
Chip edge to bond pad dimensions are shown to center of bond pad
Chip size tolerance: +/- 0.051 (0.002)

GND IS BACKSIDE OF MMIC

| | |
|---------------------|-------------------------------|
| Bond pad #1 (gate) | 0.072 x 0.075 (0.003 x 0.003) |
| Bond pad #2 (gate)* | 0.075 x 0.075 (0.003 x 0.003) |
| Bond pad #3 (gate)* | 0.075 x 0.075 (0.003 x 0.003) |
| Bond pad #4 (drain) | 0.083 x 0.077 (0.003 x 0.003) |

Minimum connections to Bond pads 1 and 4. Sources are connected to backside metalization.

*Alternate gate pads used for paralleling TGF4230s or for multiple gate wires.

NOTE: Gate bias supplies should be designed to sink or source gate current. The magnitude and direction of the gate current is a function of bias point, load impedance, and drive level.

GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.

Assembly Process Notes

Reflow process assembly notes:

- Use AuSn (80/20) solder with limited exposure to temperatures at or above 300 °C for 30 sec
- An alloy station or conveyor furnace with reducing atmosphere should be used.
- No fluxes should be utilized.
- Coefficient of thermal expansion matching is critical for long-term reliability.
- Devices must be stored in a dry nitrogen atmosphere.

Component placement and adhesive attachment assembly notes:

- Vacuum pencils and/or vacuum collets are the preferred method of pick up.
- Air bridges must be avoided during placement.
- The force impact is critical during auto placement.
- Organic attachment can be used in low-power applications.
- Curing should be done in a convection oven; proper exhaust is a safety concern.
- Microwave or radiant curing should not be used because of differential heating.
- Coefficient of thermal expansion matching is critical.

Interconnect process assembly notes:

- Thermosonic ball bonding is the preferred interconnect technique.
- Force, time, and ultrasonics are critical parameters.
- Aluminum wire should not be used.
- Discrete FET devices with small pad sizes should be bonded with 0.0007-inch wire.
- Maximum stage temperature is 200 °C.

GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.

Note: Die are shipped in gel pack unless otherwise specified.