






V _{RM} (V)	Package	Part Number	I _F (AV) (A)	I _{FSM} (A)	T _j (°C)	T _{stg} (°C)	V _F (V) max	I _F (A)	I _R (mA)	I _R (H) (mA)		R _{th(j-ℓ)} R _{th(j-c)} (°C/W)	Mass (g)	Fig. No.	Page where characteristic curve is shown	
				50Hz Half-cycle Sinewave Single Shot					V _R = V _{RM} max	V _R = V _{RM} max	T _a (°C)					
40	Surface Mount	SFPB-54	1.0	30	-40 to +150	0.55	1.0	1	50	100	20	0.072	1	82		
		SFPB-64	1.5	60	-40 to +150	0.55	2.0	5	50	100	20	0.072		83		
		SFPB-74	2.0	60	-40 to +150	0.5	2.0	5	50	100	20	0.072		—		
		SFPE-64	2.0	40	-40 to +150	0.6	2.0	0.2	20	150 (Tj)	20	0.072	2	84		
		SPB-G34S	3.0	50	-40 to +150	0.55	3.0	3.5	50	100	5	0.29				
		SPB-G54S	5.0	60	-40 to +150	0.55	5.0	5	50	100	5	0.29				
	Surface Mount Center-tap	SPB-64S	6.0	50	-40 to +150	0.55	3.0	3.5	50	100	5	0.29	3	85		
	Axial	AK 04	1.0	25	-40 to +150	0.55	1.0	1	50	100 (Tj)	22	0.13				
		AW 04	1.0	25	-40 to +150	0.58	1.0	5	35	150	22	0.13			—	
		AE 04	1.0	25	-40 to +150	0.6	1.0	0.1	10	150 (Tj)	22	0.13			—	
		EK 04	1.0	40	-40 to +150	0.55	1.0	5	50	100	20	0.3			4	86
		EE 04 *	2.0	40	-40 to +150	0.6	2.0	0.2	20	150 (Tj)	20	0.3				—
		EK 14	1.5	40	-40 to +150	0.55	2.0	5	50	100	17	0.3			5	86
		RK 14	1.7	60	-40 to +150	0.55	2.0	5	50	100	15	0.45			6	87
		RK 34	2.5	50	-40 to +150	0.55	2.5	5	50	100	12	0.6			7	
		RK 44	3.0	80	-40 to +150	0.55	3.0	5	50	100	8	1.2	8	88		
	Frame-2Pin	FMB-G14	3.0	60	-40 to +150	0.55	3.0	5	100	100	4	2.1	9	89		
		FMB-G14L	5.0	60	-40 to +150	0.55	5.0	5	100	100	4	2.1				
		FMB-G24H	10.0	150	-40 to +150	0.55	10.0	10	65	100	4	2.1				
	Center-tap	MPE-24H	15	100	-40 to +150	0.6	7.5	0.75	50	150 (Tj)	2.5	1.04	10/10	85		
		FMB-24	4.0	50	-40 to +150	0.55	2.0	5	35	100	4	2.1	11	90		
		FMB-24M	6.0	60	-40 to +150	0.55	3.0	5	35	100	4	2.1		91		
		FMW-24L	10.0	100	-40 to +150	0.55	5.0	5	175	150	4	2.1		90		
		FMB-24L	10	60	-40 to +150	0.55	5.0	5	35	100	4	2.1	12	92		
		FME-2104	10	80	-40 to +150	0.6	5.0	0.5	30	100	4	2.1		94		
		FMB-34S	12	75	-40 to +150	0.58	6	5	35	100	2	5.5		90		
FMW-24H		15	120	-40 to +150	0.55	7.5	7.5	250	150	4	2.1	11	92			
FME-24H		15	100	-40 to +150	0.6	7.5	0.75	50	100	4	2.1		90			
FMB-24H		15	100	-40 to +150	0.55	7.5	7.5	50	100	4	2.1		93			
FMB-34		15	150	-40 to +150	0.55	7.5	10	65	100	2	5.5	12	93			
FMB-2204		20	150	-40 to +150	0.55	10	10	350	150	4	2.1	11	—			
FMW-2204		20	120	-40 to +150	0.55	10	10	350	150 (Tj)	4	2.1		81			
FMB-2304		30	150	-40 to +150	0.55	15	15	500	150	4	2.1		91			
FMB-34M		30	300	-40 to +150	0.55	15.0	20	100	100	2	5.5	12	93			

*




■ External Dimensions Flammability: UL94V-0 or Equivalent (Unit: mm)

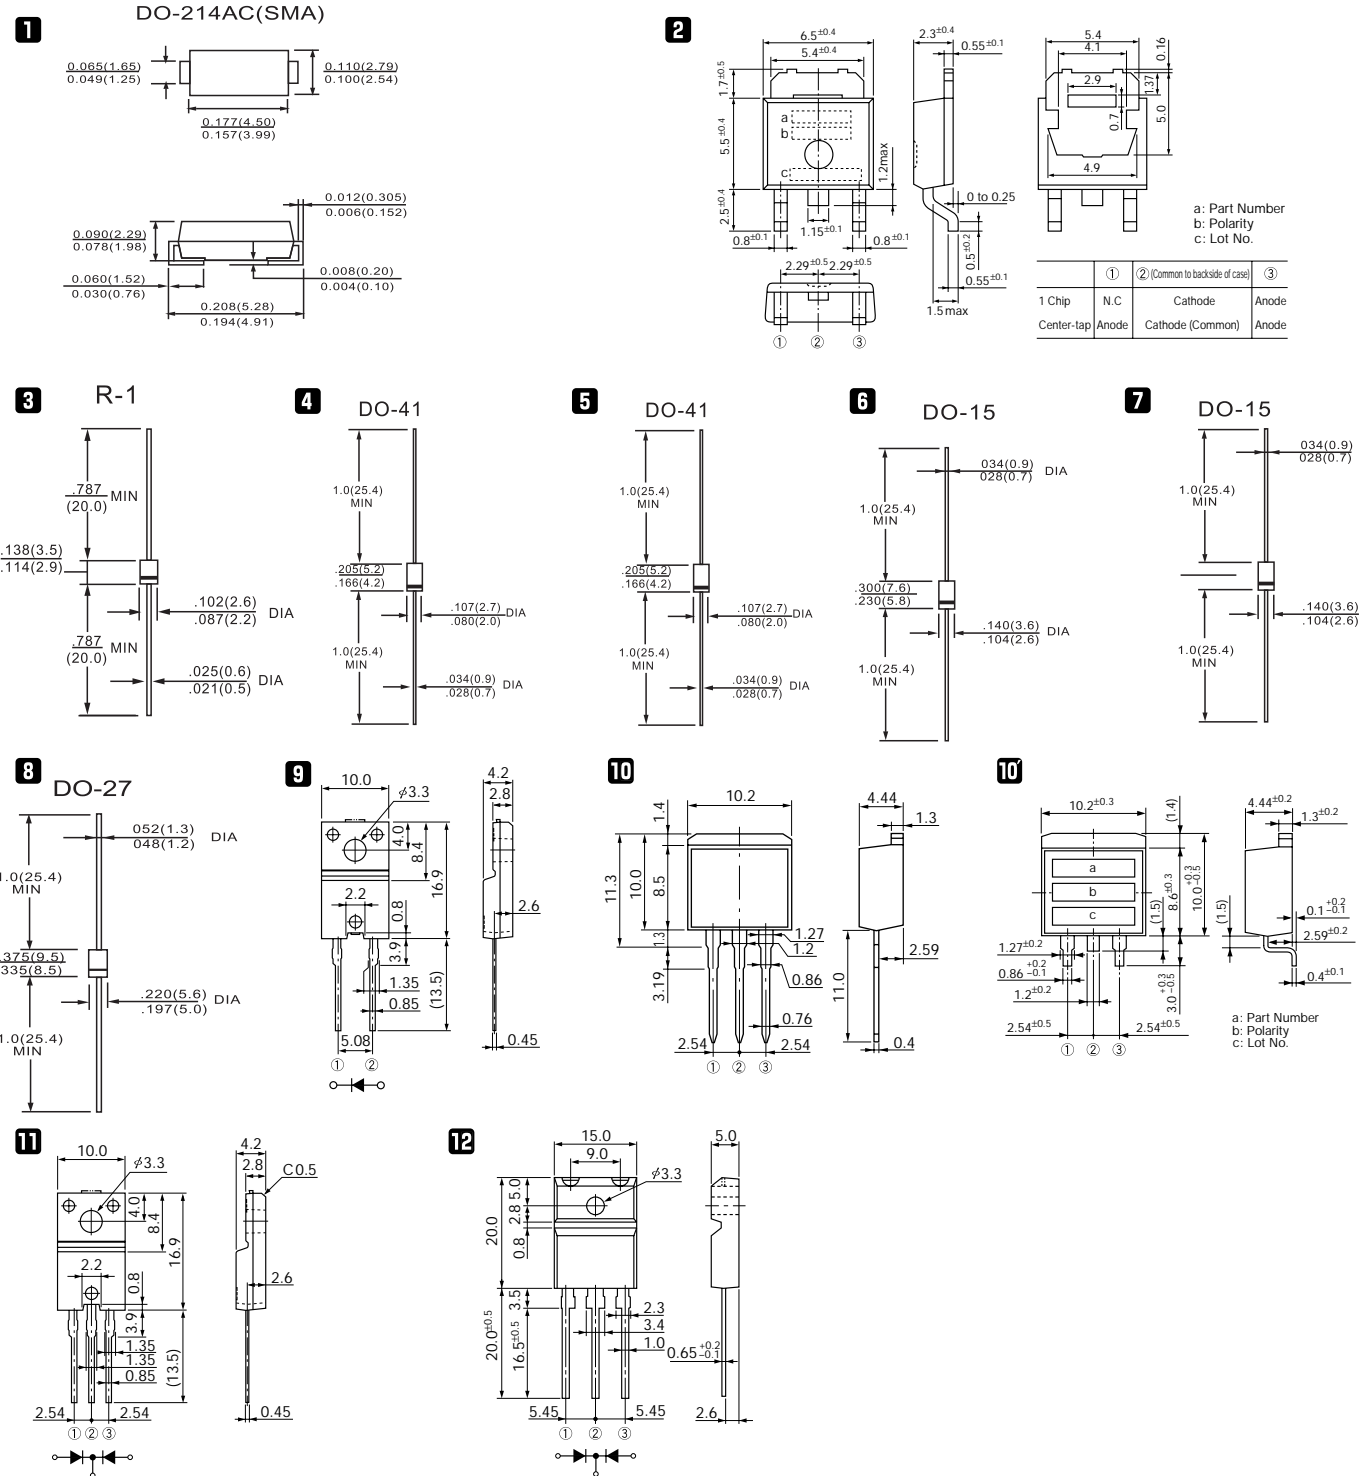




FME-220A







FME-230A



FMJ-23L



FMB-34



FMB-34M

