

# ES2ABF THRU ES2JBF

## 2.0 AMP SURFACE MOUNT SUPER FAST RECTIFIERS

### FEATURES

- \* Ideal for surface mount applications
- \* Easy pick and place
- \* Built-in strain relief
- \* Low forward voltage drop

### MECHANICAL DATA


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Metallurgically bonded construction
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any

### VOLTAGE RANGE

50 to 600 Volts

### CURRENT

2.0 Amperes

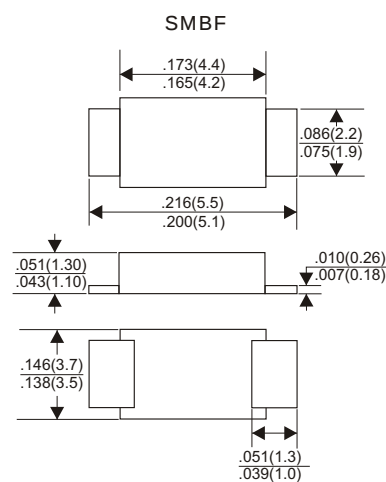

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.


| TYPE NUMBER                                                                                        | ES2ABF     | ES2BBF | ES2CBF | ES2DBF | ES2EBF | ES2GBF | ES2JBF | UNITS |
|----------------------------------------------------------------------------------------------------|------------|--------|--------|--------|--------|--------|--------|-------|
| Maximum Recurrent Peak Reverse Voltage                                                             | 50         | 100    | 150    | 200    | 300    | 400    | 600    | V     |
| Maximum RMS Voltage                                                                                | 35         | 70     | 105    | 140    | 210    | 280    | 420    | V     |
| Maximum DC Blocking Voltage                                                                        | 50         | 100    | 150    | 200    | 300    | 400    | 600    | V     |
| Maximum Average Forward Rectified Current                                                          |            |        |        |        |        |        |        |       |
| .375"(9.5mm) Lead Length at Ta=55°C                                                                | 2.0        |        |        |        |        |        |        | A     |
| Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | 50         |        |        |        |        |        |        | A     |
| Maximum Instantaneous Forward Voltage at 2.0A                                                      | 0.95       |        |        |        | 1.25   |        | 1.70   | V     |
| Maximum DC Reverse Current Ta=25°C                                                                 | 5.0        |        |        |        |        |        |        | μA    |
| at Rated DC Blocking Voltage Ta=100°C                                                              | 500        |        |        |        |        |        |        | μA    |
| Maximum Reverse Recovery Time (Note 1)                                                             | 35         |        |        |        |        |        |        | nS    |
| Typical Junction Capacitance (Note 2)                                                              | 60         |        |        |        |        |        |        | pF    |
| Operating and Storage Temperature Range Tj, Tstg                                                   | -65 — +150 |        |        |        |        |        |        | °C    |

#### NOTES:

1. Reverse Recovery Time test condition: IF=0.5A, IR=1.0A, IRR=0.25A
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

## RATING AND CHARACTERISTIC CURVES (ES2ABF THRU ES2JBF)

FIG.1- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

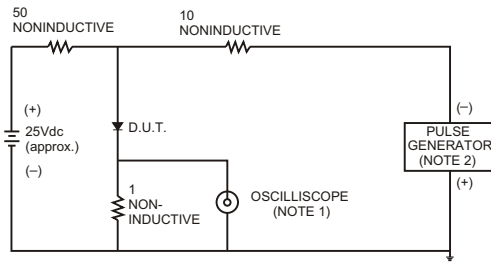

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm.22pF.  
2. Rise Time= 10ns max., Source Impedance= 50 ohms.



FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

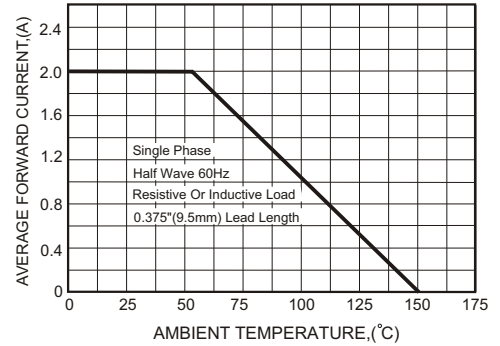


FIG.3-TYPICAL FORWARD CHARACTERISTICS

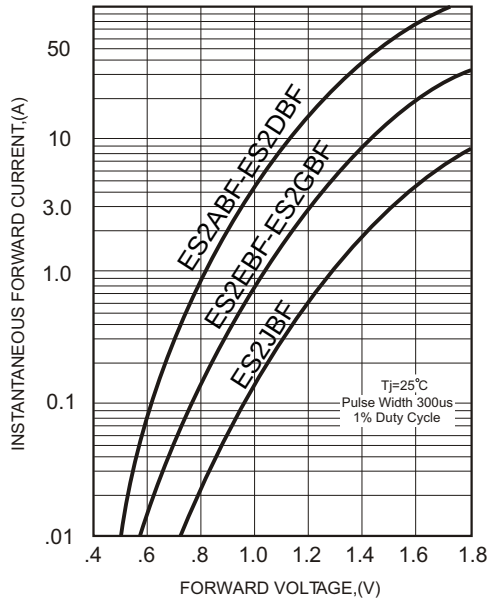


FIG.4-TYPICAL REVERSE CHARACTERISTICS

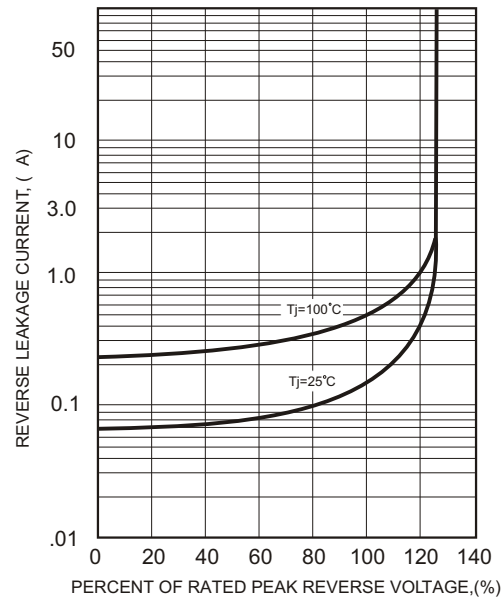


FIG.5-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

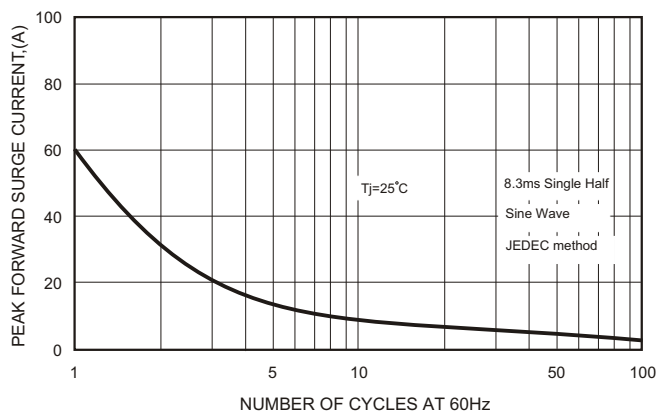


FIG.6-TYPICAL JUNCTION CAPACITANCE

