


Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0 utilizing Flame Retardant Epoxy Molding Compound.
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.
- Exceeds environmental standards of MIL-S-19500/228

Mechanical Data

- Case: Moulded plastic DO-41
- Terminals: Plated leads solderable per MIL-STD-202, Method 208 guaranteed
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Making: Type Number
- Lead Free: For Rohs/Lead Free Version

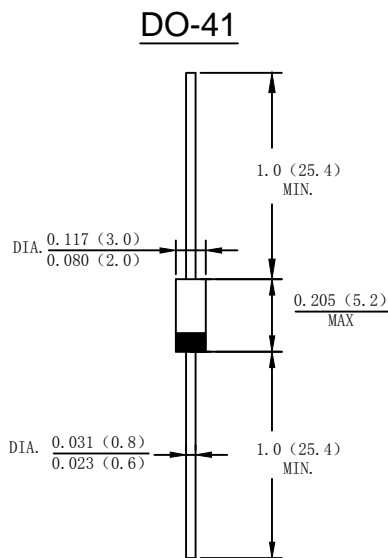

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load

For capacitive load derate current by 20%

Type Number	SYMBOL	SB 120	SB 130	SB 140	SB 150	SB 160	SB 180	SB 1100	SB 1150	SB 1200	SB 1250	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	150	200	250	V
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	70	105	140	175	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	100	150	200	250	V
Average Rectified Output Current (Note 1) @ $T_A = 75^\circ C$	I_o	1.0										A
Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30										A
Forward Voltage @ $I_F = 1.0A$	V_{FM}	0.55		0.7		0.85		0.92		0.95		V
Peak Reverse Current @ $T_A = 25^\circ C$	I_R	0.1					0.05					mA
At Rated DC Blocking Voltage @ $T_A = 100^\circ C$		10.0					5.0					
Typical Junction Capacitance (Note 2)	C_J	110										pF
Typical Thermal Resistance Junction to Ambient (Note 1)	$R_{\theta JA}$	80										$^\circ C/W$
Operating Temperature Range	T_J	-55 to +150										$^\circ C$
Storage Temperature Range	T_{STG}	-55 to +150										$^\circ C$

Note: 1. Leads maintained at ambient temperature at a distance of 9.5mm from the case

2. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C

Fig.1-FORWARD CURRENT DERATING CURVE

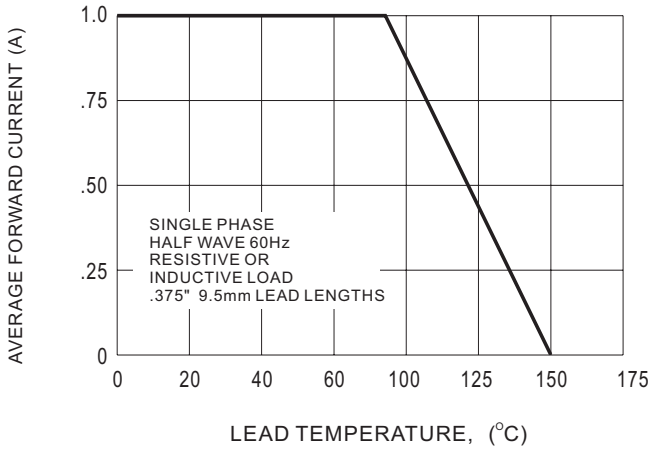


Fig.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

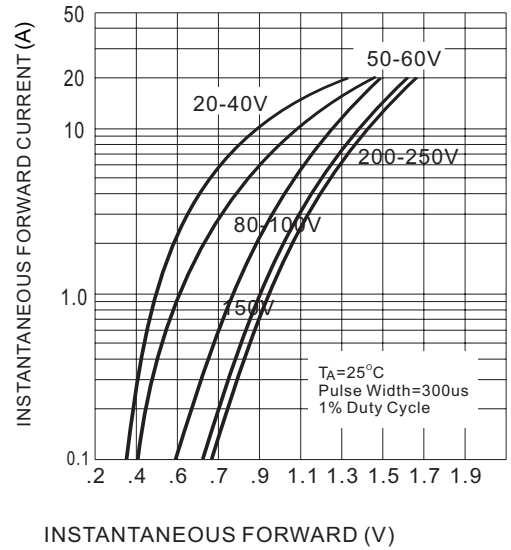


Fig.3-MAXIMUM NON-REPETITIVE SURGE CURRENT

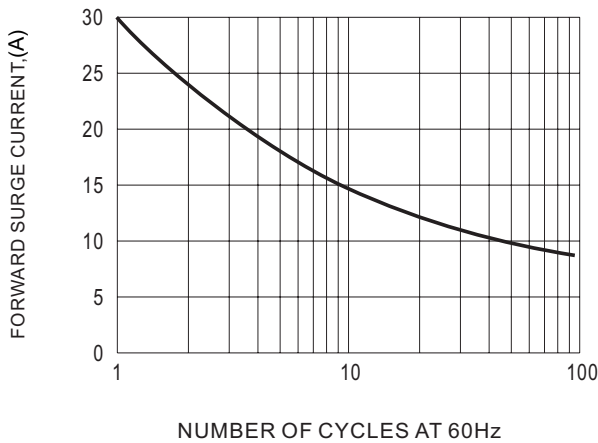


Fig.4-TYPICAL JUNCTION CAPACITANCE

