


Features

- Low loss.
- High current capability
- High reliability
- High surge current capability
- Plastic material-UL flammability 94V-0

Mechanical Data

- Case: Moeded plastic DO-41
- Terminals: Plated leads solderable per MIL-STD-202,Method 208 guaranteed
- Polarity: Color band dentes cathode end
- Mounting Position: Any
- Making: Type Number
- Lead Free: For Rohs/Lead Free Version

DO-41

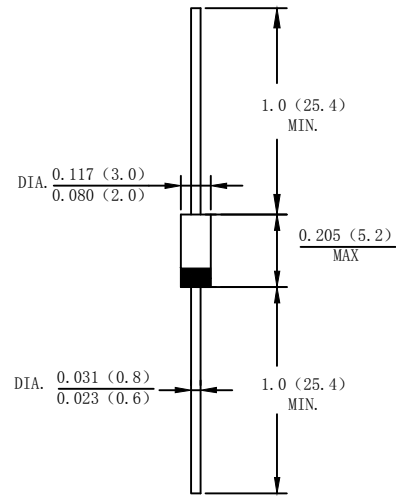

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load

For capacitive load derate current by 20%

Type Number	SYMBOL	UF 4001	UF 4002	UF 4003	UF 4004	UF 4005	UF 4006	UF 4007	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Average Rectified Output Current (Note 1) @ $T_A = 55^\circ C$	I_o	1.0							A
Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30							A
Forward Voltage @ $I_F = 1.0A$	V_{FM}	1.0			1.7			V	
Peak Reverse Current @ $T_A = 25^\circ C$	I_R	5.0							uA
At Rated DC Blocking Voltage @ $T_A = 125^\circ C$		100							
Maximum Reverse Recovery Time (Note2)	T_{RR}	50			75			nS	
Typical Junction Capacitance (Note 3)	C_J	17							pF
Typical Thermal Resistance Junction to Ambient (Note 1)	$R_{\theta JA}$	15							$^\circ C/W$
Operating Temperature Range	T_J	-55 to+ 125							$^\circ C$
Storage Temperature Range	T_{STG}	-55 to+ 150							$^\circ C$

Note: 1. Leads maintained at ambient temperature at a distance of 9.5mm from the case

2. Reverse Recovery Test Conditions: $I_F = 0.5A$, $I_R = 1A$, $I_{rr} = 0.25A$.

3. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

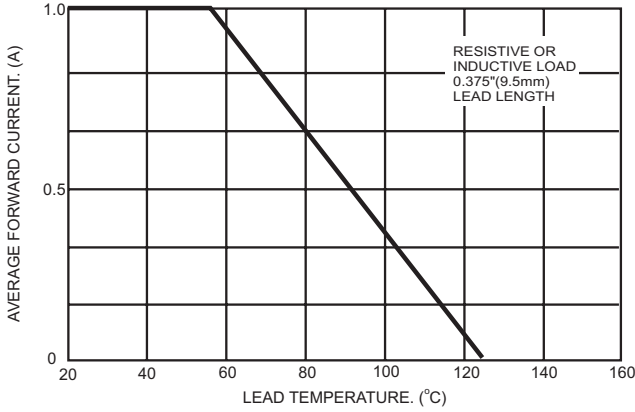


FIG.2- TYPICAL FORWARD CHARACTERISTICS

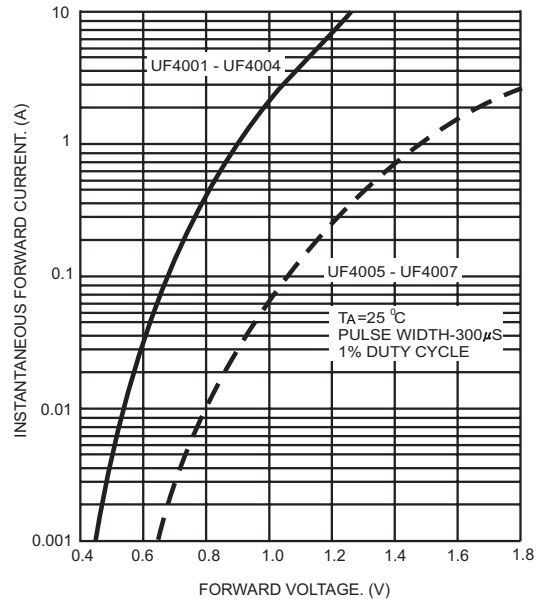


FIG.3- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

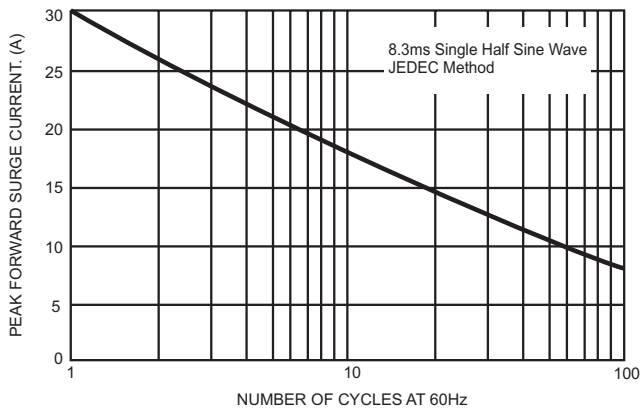


FIG.4- TYPICAL JUNCTION CAPACITANCE

