


Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

Mechanical Data

- Case: Moeded plastic DO-15
- Terminals: Plated leads solderable per MIL-STD-202,Method 208 guaranteed
- Polarity: Color band dentes cathode end
- Mounting Position: Any
- Making: Type Number
- Lead Free: For Rohs/Lead Free Version

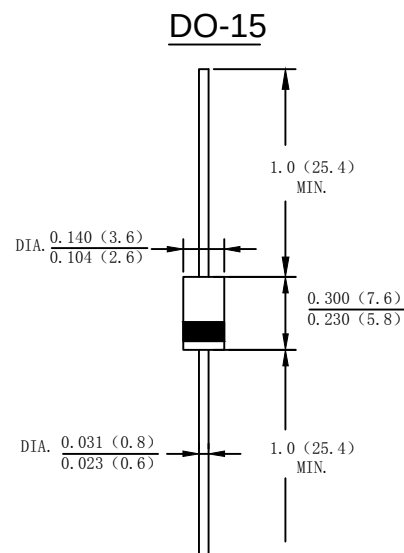

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase,half wave,60Hz,resistive or inductive load

For capacitive load derate current by 20%

Type Number	SYMBOL	SF 21GU	SF 22GU	SF 23GU	SF 24GU	SF 25GU	SF 26GU	SF 28GU	Unit
Maximum Recurrent Peak Reverse Voltage	V _{RM}	50	100	150	200	300	400	600	V
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	V
Average Rectified Output Current (Note 1) @T _A =55°C	I _O	2.0							A
Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	60							A
Forward Voltage @IF=2.0A	V _{FM}	0.95				1.25		1.7	V
Peak Reverse Current @T _A =25°C	I _R	5.0							uA
At Rated DC Blocking Voltage @T _A =125°C		100							
Maximum Reverse Recovery Time (Note2)	T _{RR}	35							nS
Typical Junction Capacitance (Note 3)	C _j	40				30			pF
Typical Thermal Resistance Junction to Ambient	R _{θJA}	25							K/W
Operating Temperature Range	T _j	-55 to + 150							°C
Storage Temperature Range	T _{STG}	-55 to + 150							°C

Note: 1. Leads maintained at ambient temperature at a distance of 9.5mm from the case

2.Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $IRR=0.25A$

3. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C

FIG. 1 – FORWARD CURRENT DERATING CURVE

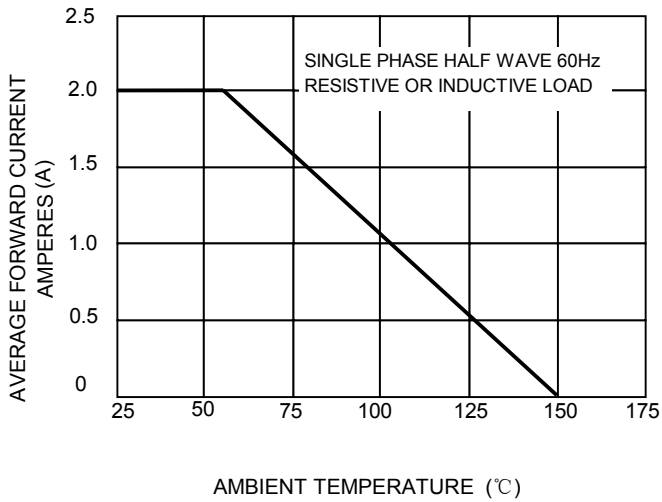


FIG.2-TYPICAL FORWARD CHARACTERISTICS

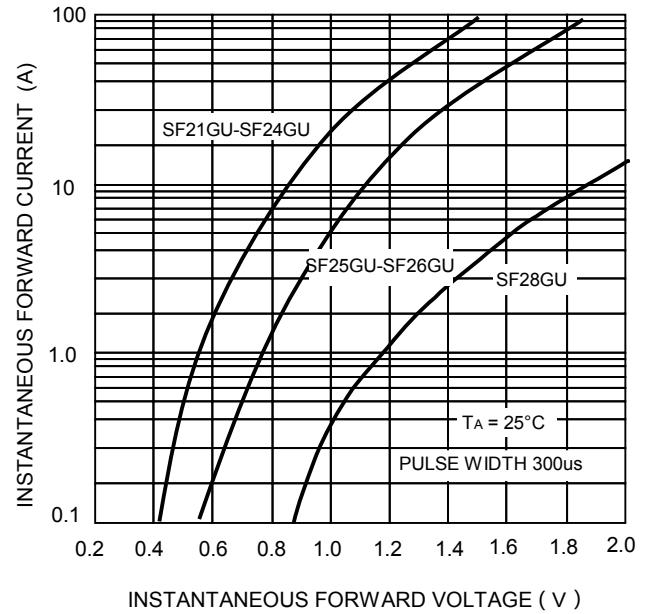


FIG. 3 – MAXIMUM NON-REPETITIVE SURGE CURRENT

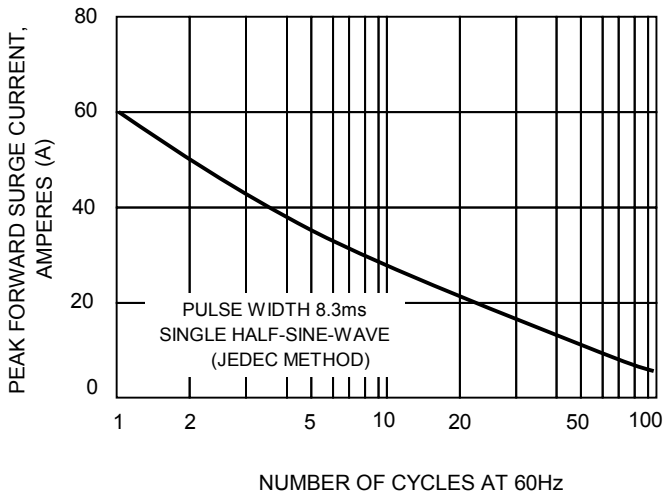


FIG.4 – TYPICAL JUNCTION CAPACITANCE

