

SBL540 THRU SBL560-HAF

SCHOTTKY BARRIER RECTIFIERS

Reverse Voltage -40 to 60 V
Forward Current - 5 A


Features

- Ultra Low Forward Voltage Drop
- Low Power Losses, High Efficiency Operation
- High Current Capability
- Low Thermal Resistance Package
- High Operating Junction Temperature
- Halogen and Antimony Free(HAF), RoHS compliant

Mechanical Data

- **Case:** Molded plastic
- **Epoxy:** UL 94V-0 rate flame retardant
- **Lead:** Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- **Mounting Position:** Color band denotes cathode end

DO-201AD

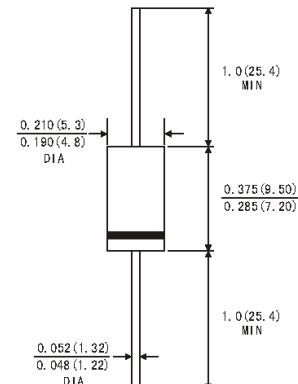

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, resistive or inductive load, for capacitive load, derate by 20%

Parameter	Symbols	SBL540	SBL560	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	60	V
Maximum RMS Voltage	V_{RMS}	28	42	V
Maximum DC Blocking Voltage	V_{DC}	40	60	V
Maximum Average Forward Rectified Current	$I_{(AV)}$	5		A
Peak Forward Surge Current 8.3mS Single Half Sine-wave	I_{FSM}	150		A
Maximum Instantaneous Forward Voltage	V_F	0.45	0.5	V
Maximum Instantaneous Reverse Current at Rated DC Blocking Voltage	I_R	0.2		mA
Typical Thermal Resistance ¹⁾	$R_{\theta JL}$	15		°C/W
Power Dissipation	P_D	2.67		W
Operating Temperature Range	T_J	- 55 to + 150		°C
Operating and Storage Temperature Range	T_J, T_{Stg}	- 55 to + 150		°C

¹⁾ Pulse test: 300 µs , 1% duty cycle


TOP DYNAMIC




ISO14001 : 2004 ISO 9001 : 2008 OHSAS 18001 : 2007 IEC60068-2-27
Certificate No. 121505007 Certificate No. 50114012 Certificate No. 05131506006
DEKRA UKAS DEKRA UKAS DEKRA UKAS

Dated :07/06/2016 JG Rev:01


SBL540 THRU SBL560-HAF

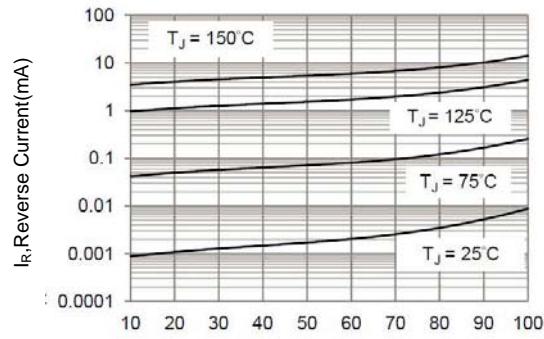


Percent of Rated Peak Reverse Voltage (%)
Figure 1.Typical Reverse Characteristics

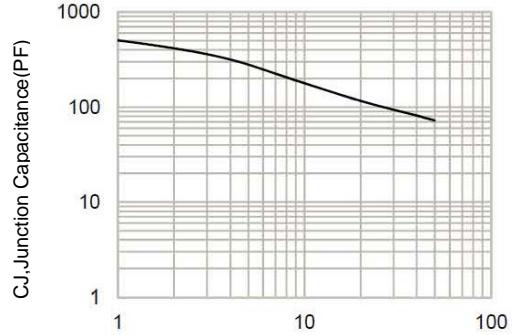

V_R,Reverse Bias Voltage(V)
Figure 2.Typical Junction Capacitance

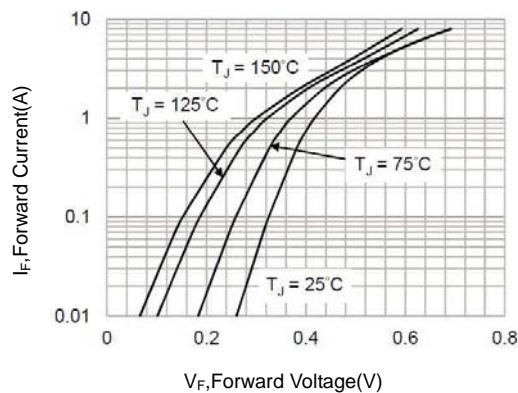

V_F,Forward Voltage(V)
Figure 3. Typical Forward Characteristics

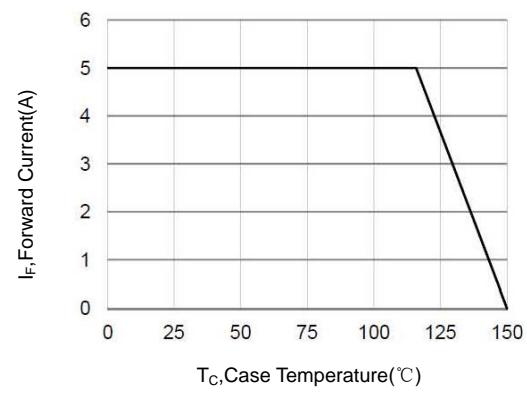

T_C, Case Temperature (°C)
Figure 4. Forward Current Derating Curve

TOP DYNAMIC



ISO14001 : 2004 ISO 9001 : 2008 OHSAS 18001 : 2007 IECQ QJC 080000
Certificate No. 121505007 Certificate No. 50114012 Certificate No. 05131506006 Certificate No. EC/HK/001/KM2

Dated :07/06/2016 JG Rev:01