

FR07BW THRU FR07MW


Surface Mount Fast Recovery Rectifiers

Reverse Voltage - 100 to 1000 V

Forward Current - 0.7 A

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

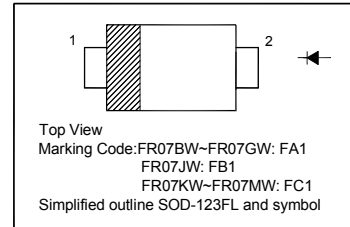

Maximum Ratings and Electrical characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	FR07BW	FR07DW	FR07GW	FR07JW	FR07KW	FR07MW	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_a = 65^\circ\text{C}$ ¹⁾	$I_{F(AV)}$	0.7						A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	20						A
Maximum Instantaneous Forward Voltage at 0.7 A	V_F	1.15						V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_a = 25^\circ\text{C}$ $T_a = 125^\circ\text{C}$	I_R	10 50						μA
Maximum Reverse Recovery Time ²⁾	t_{rr}	150		250		500		ns
Typical Thermal Resistance ³⁾	$R_{\theta JA}$	180						K/W
Typical Junction Capacitance ⁴⁾	C_j	4						pF
Operating and Storage Temperature Range	T_j, T_{stg}	- 55 to + 150						$^\circ\text{C}$

1) Averaged over any 20 ms period.

2) Measured with $I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$, $I_{rr} = 0.25\text{ A}$

3) Thermal resistance junction to ambient, 6.0 mm² copper pads to each terminal.

4) Measured at 1MHz and applied reverse voltage of 4V D.C

TOP DYNAMIC



Dated: 16/09/2013 Rev: 01

FR07BW THRU FR07MW

FIG.1 – TYPICAL FORWARD CHARACTERISTIC

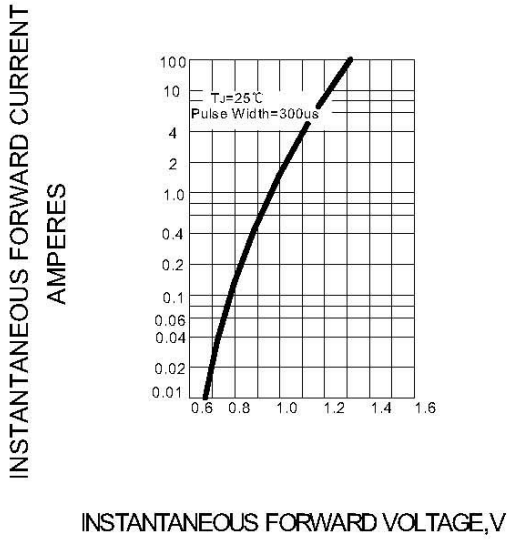


FIG.2 – TYPICAL JUNCTION CAPACITANCE

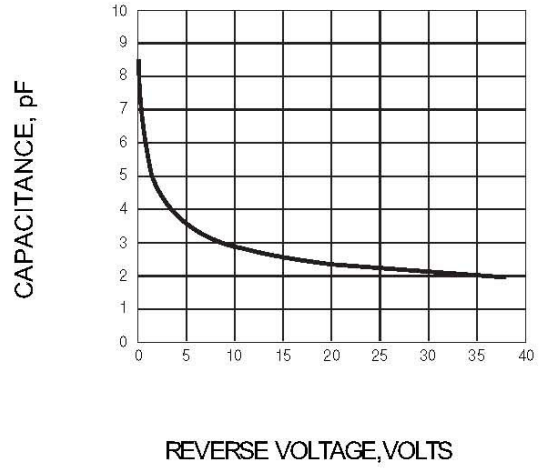


FIG.3 – TYPICAL INSTANTANEOUS REVERSE CHARACTERISTICS


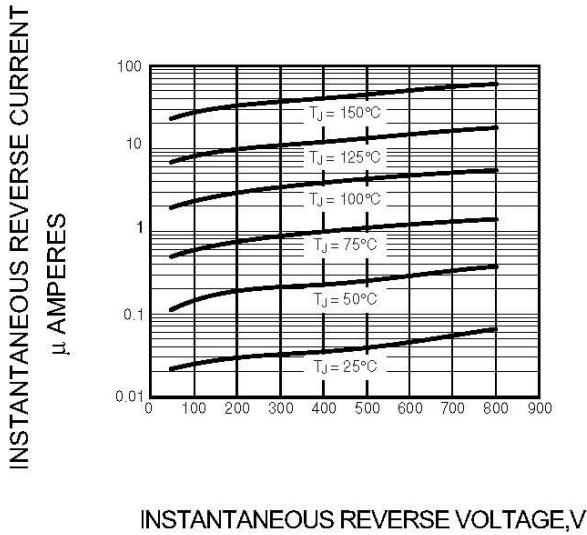


FIG.4 – FORWARD DERATING CURVE



TOP DYNAMIC

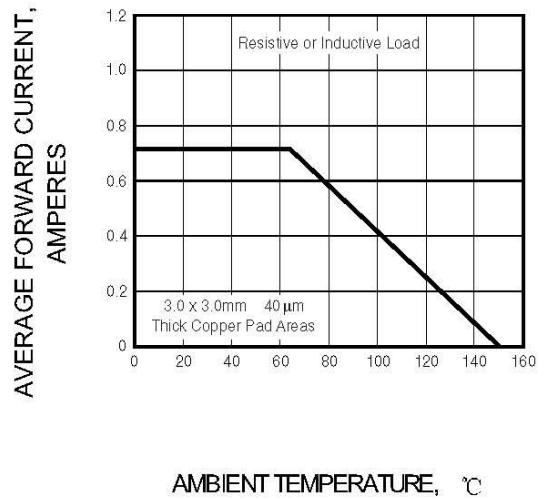


FR07BW THRU FR07MW

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123FL

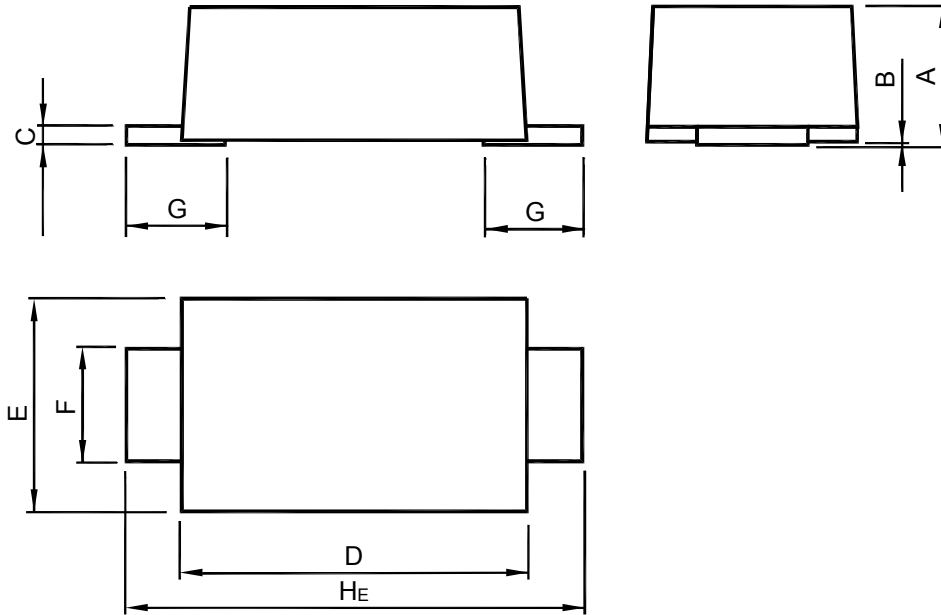

UNIT	A	B	C	D	E	F	G	H _E
mm	1.08	0.1	0.2	2.9	1.9	1.1	0.9	3.9
	0.88	0	0.1	2.6	1.7	0.8	0.7	3.5

Recommended Soldering Footprint

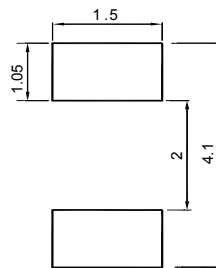

Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOD-123FL	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

TOP DYNAMIC



Dated: 16/09/2013 Rev: 01