


Features

- Glass passivated device
- Ideal for surface mouted applications
- Low reverse leakage
- Metallurgically bonded construction
- High temperature soldering guaranteed:
260°C/10 seconds,0.375"(9.5mm) lead length,
5 lbs. (2.3kg) tension
- Plastic material-UL flammability 94V-0

Mechanical Data

- Case: SOD-123FL, molded plastic
- Terminals: plated leads solderable per
MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any

SOD-123FL

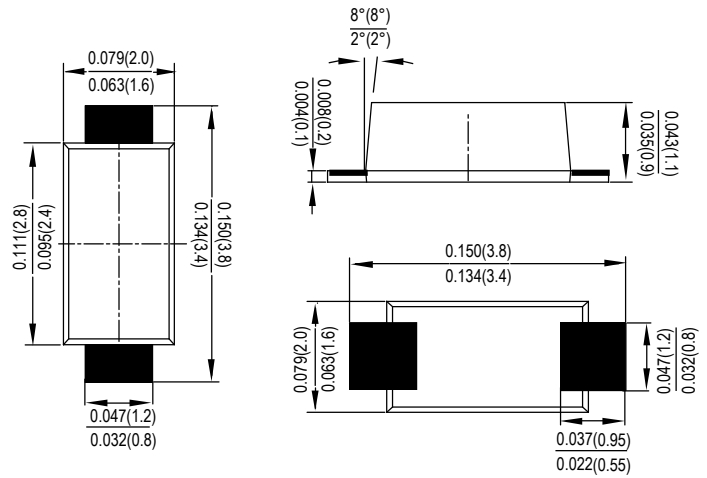

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single Phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	ES1ANL	ES1BNL	ES1DNL	ES1GNL	ES1JNL	UNITS
	Code	EAN	EBN	EDN	EGN	EJN	
Peak Repetitive Reverse Voltage	V_{RRM}	50	100	200	400	600	V
Working Peak Reverse Voltage	V_{RWM}						
DC Blocking Voltage	V_{DC}						
RMS Reverse Voltage	V_{RMS}	35	70	140	280	420	V
Average Rectified Output Current @ $T_A=30^\circ C$	I_o	1.0					A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	25					A
Forward Voltage per element @ $I_F=0.5A$	V_{FM}	0.95			1.25	1.7	V
Peak Reverse Current @ $T_A=25^\circ C$ At Rated DC Blocking Voltage @ $T_A=100^\circ C$	I_R	5.0			100		μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	35					ns
Typical junction capacitance (NOTE 2)	C_J	10					pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	85					$^\circ C/W$
Operating and Storage Temperature Range	T_J, T_{STG}	-55to+150					$^\circ C$

Note:1. Measured with $I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$.

2. Thermal resistance from junction to ambient at 0.375" (9.5mm)lead length,P.C.B. mounted

3. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

FIG. 1- FORWARD CURRENT DERATING CURVE

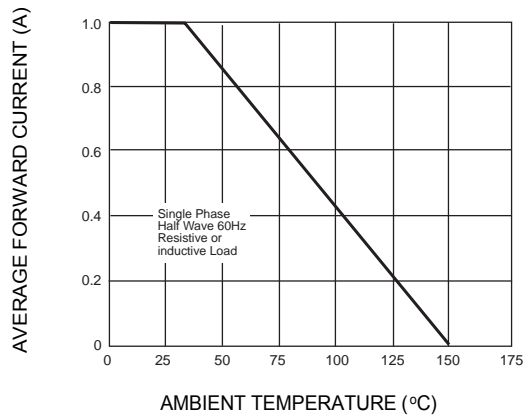


FIG. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

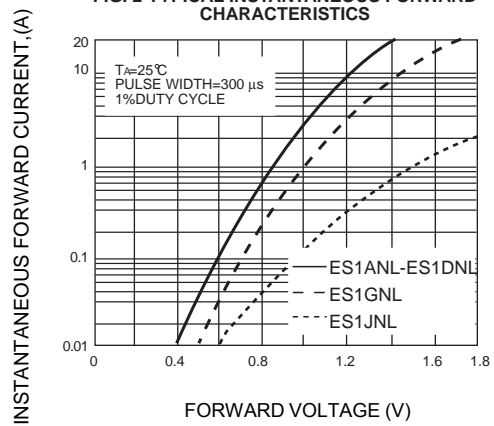


FIG. 3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

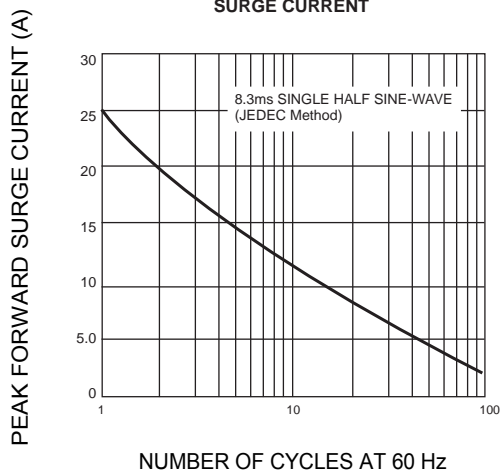


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

