


### Features

- Glass passivated die construction
- Ideal for surface mounted applications
- Low reverse leakage
- Metallurgically bonded construction
- High temperature soldering guaranteed:  
260°C/10 seconds, 0.375"(9.5mm) lead length,  
5 lbs. (2.3kg) tension
- Plastic material-UL flammability 94V-0

### Mechanical Data

- Case: SOD-123FL, molded plastic
- Terminals: plated leads solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any

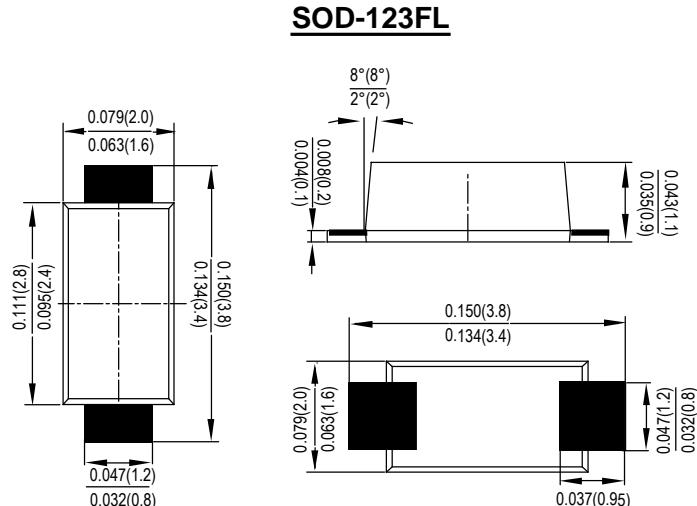

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single Phase, half wave, 60Hz, resistive or inductive load.


For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	FFM101-M	FFM102-M	FFM103-M	FFM104-M	FFM105-M	FFM106-M	FFM107-M	UNITS			
		Code	F1	F2	F3	F4	F5	F7				
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V			
	V <sub>RWM</sub>											
	V <sub>DC</sub>											
RMS Reverse Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V			
Average Rectified Output Current @T <sub>A</sub> =30°C	I <sub>O</sub>	1.0							A			
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	30							A			
Forward Voltage per element @IF=1.0A	V <sub>FM</sub>	1.3							V			
Peak Reverse Current @T <sub>A</sub> =25°C At Rated DC Blocking Voltage @T <sub>A</sub> =100 °C	I <sub>R</sub>	5.0 100							uA			
Maximum reverse recovery time (NOTE 1)	t <sub>rr</sub>	150			250	500			ns			
Typical junction capacitance (NOTE 2)	C <sub>J</sub>	15							pF			
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55to+150							°C			


Note:1. Measured with IF=0.5A, IR=1A, Irr=0.25A.

2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.


**FIG. 1- FORWARD CURRENT DERATING CURVE**

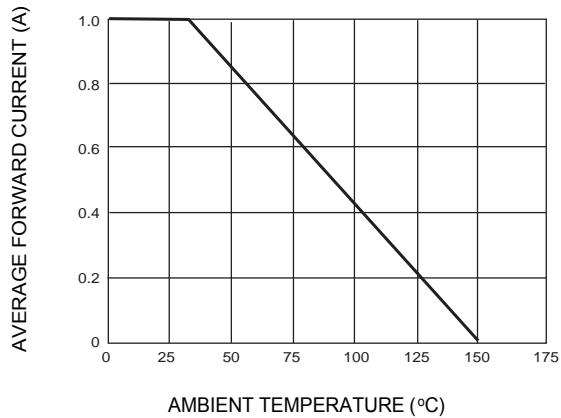

**FIG. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

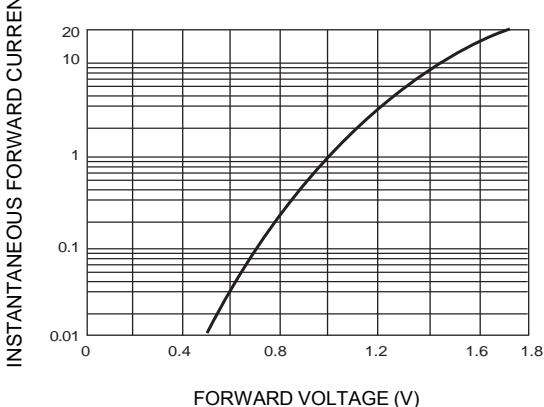

**FIG. 3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

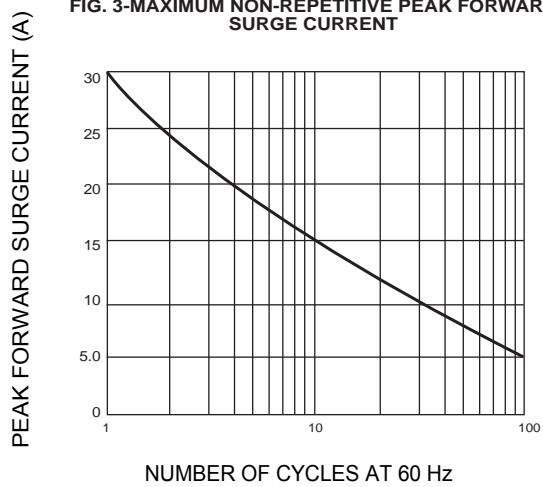

**FIG. 4-TYPICAL REVERSE CHARACTERISTICS**

