

SR220 THRU SR2200


Schottky Barrier Rectifiers Reverse Voltage – 20 to 200 V Forward Current – 2 A

Features

- Guard ring for overvoltage protection
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- Metal silicon junction, majority carrier conduction

Mechanical Data

- **Case:** Molded plastic, DO-15.
- **Terminals:** Axial leads, solderable per MIL-STD-750, method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any

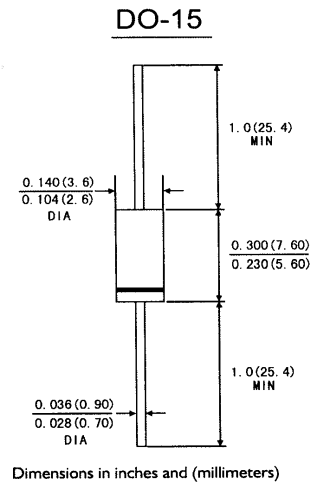

Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

Parameter	Symbols	SR220	SR230	SR240	SR250	SR260	SR280	SR2100	SR2150	SR2200	Units	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	150	200	V	
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	57	71	105	140	V	
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	100	150	200	V	
Maximum Forward Voltage at 2 A ¹⁾	V_F	0.55		0.7		0.85		0.95			V	
Maximum Average Forward Rectified Current 0.375"(9.5 mm) Lead Length at $T_L = 75\text{ °C}$	$I_{F(AV)}$	2									A	
Peak Forward Surge Current 8.3 ms Single half sine-wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	50									A	
Maximum Reverse Current at Rated DC Blocking Voltage ¹⁾	I_R						1	10			mA	
Typical Junction Capacitance ³⁾	C_J						180					pF
Typical Thermal Resistance ²⁾	$R_{\theta JA}$						45					°C/W
Operating Junction Temperature Range	T_J	- 55 to + 125			- 55 to + 150						°C	
Storage Temperature Range	T_{stg}	- 55 to + 150									°C	

¹⁾ Pulse test: 300 μ s pulse width, 1% duty cycle

²⁾ Thermal resistance from junction to lead, and/or to ambient P.C.B mounted with 0.375"(9.5 mm) lead length with 1.5 X 1.5"(38 mm X 38 mm) copper pads

³⁾ Measure at 1 MHz and reverse voltage of 4 V.

TOP DYNAMIC



SR220 THRU SR2200

FIG.1-FORWARD CURRENT DERATING CURVE

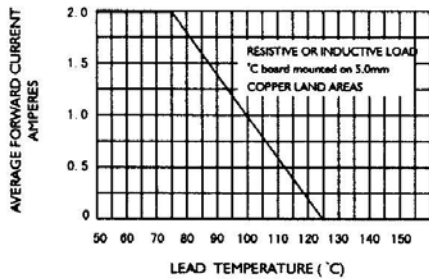


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

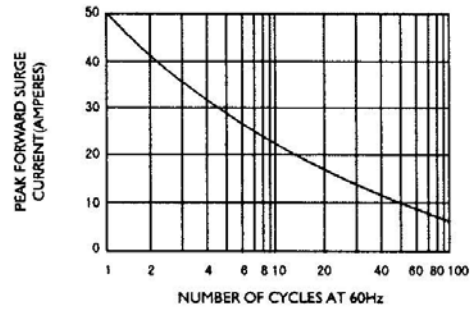


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

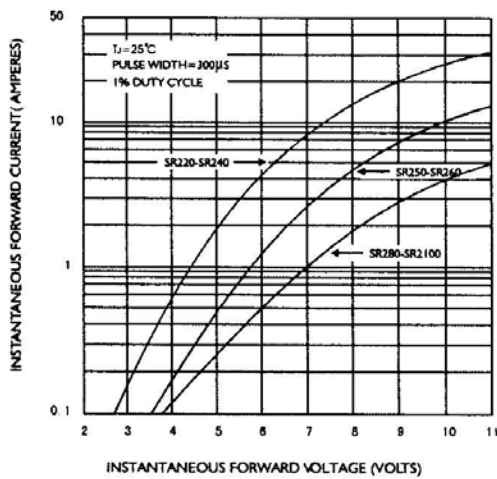


FIG.4-TYPICAL REVERSE CHARACTERISTICS


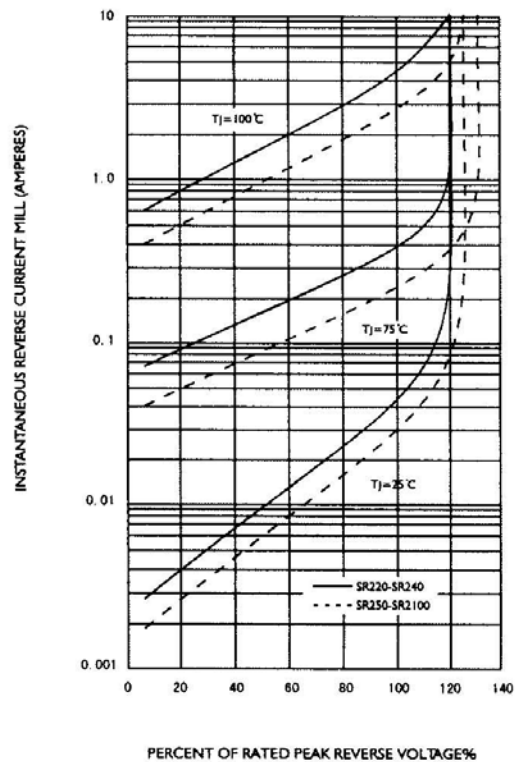


FIG.5-TYPICAL JUNCTION CAPACITANCE



TOP DYNAMIC

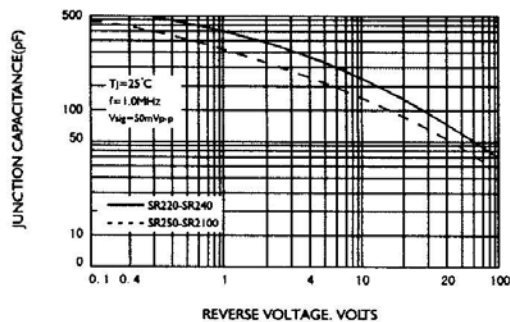

ISO14001 : 2004 Certificate No. 121505007
 ISO 9001 : 2008 Certificate No. 50114012
 OHSAS 18001 : 2007 Certificate No. 05131508008
 IECQ QC 080000 Certificate No. E2011000741M2