

SDB22W THRU SDB220W


Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 20 to 200 V

Forward Current - 2 A

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

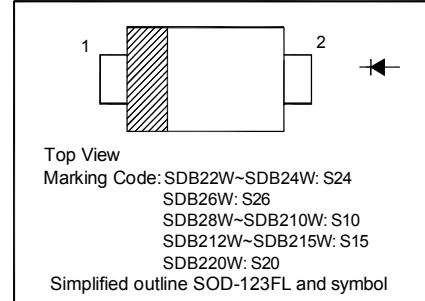

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20%.





Parameter	Symbols	SDB22W	SDB24W	SDB26W	SDB28W	SDB210W	SDB212W	SDB215W	SDB220W	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V
Maximum RMS Voltage	V_{RMS}	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	2								A
Peak Forward Surge Current 8.3 ms Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50								A
Maximum Instantaneous Forward Voltage at 2 A	V_F	0.55	0.7	0.85	0.9			V		
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_a = 25^\circ\text{C}$ $T_a = 100^\circ\text{C}$	I_R	0.1			0.03			mA		
		20		10	5					
Typical Thermal Resistance ¹⁾	$R_{\theta JA}$	75								°C/W
Operating Junction Temperature Range	T_j	- 55 to + 125			- 55 to + 150				°C	
Storage Temperature Range	T_{stg}	- 55 to + 150								°C

¹⁾ P.C.B mounted with 0.2 X 0.2"(5 X 5 mm) copper pad areas.

TOP DYNAMIC



SDB22W THRU SDB220W

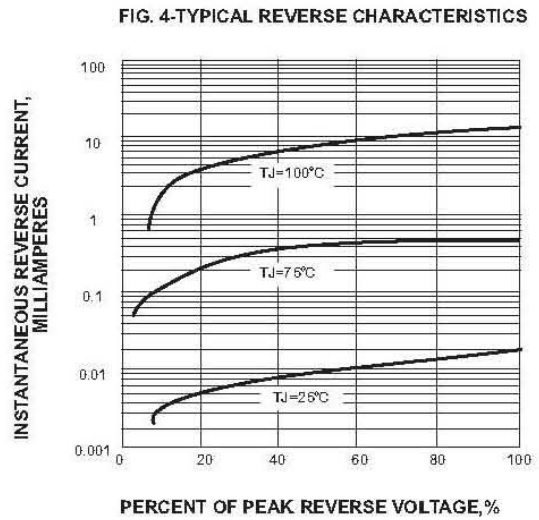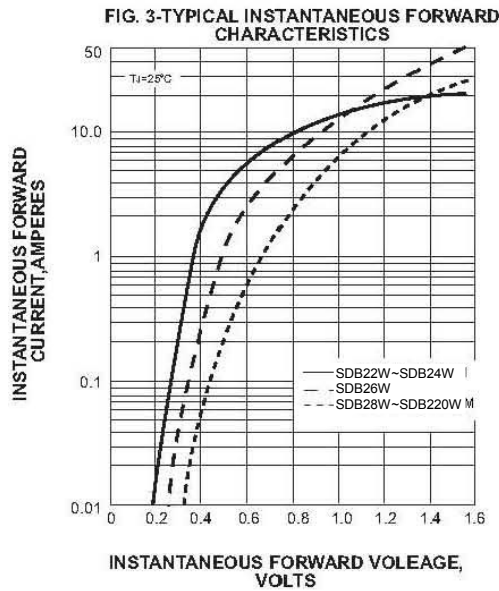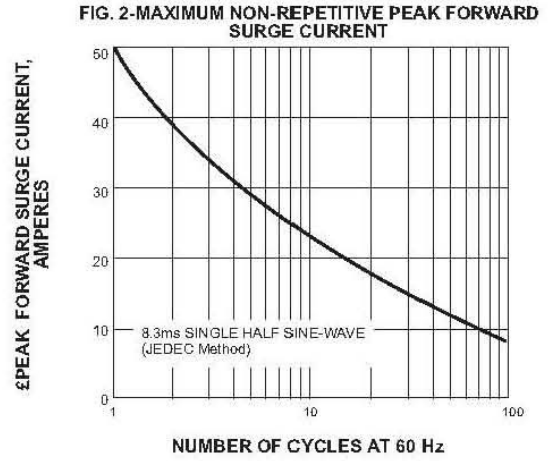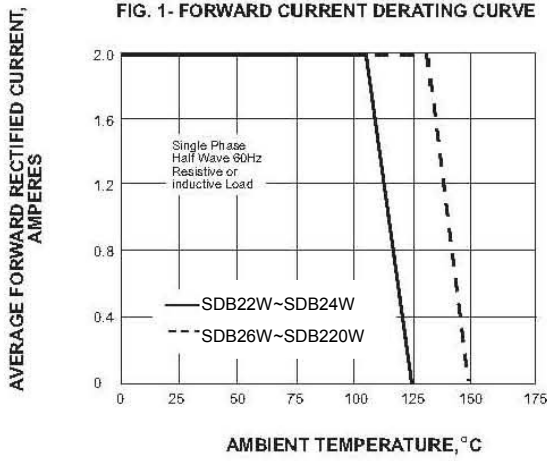

TOP DYNAMIC




SDB22W THRU SDB220W

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123FL

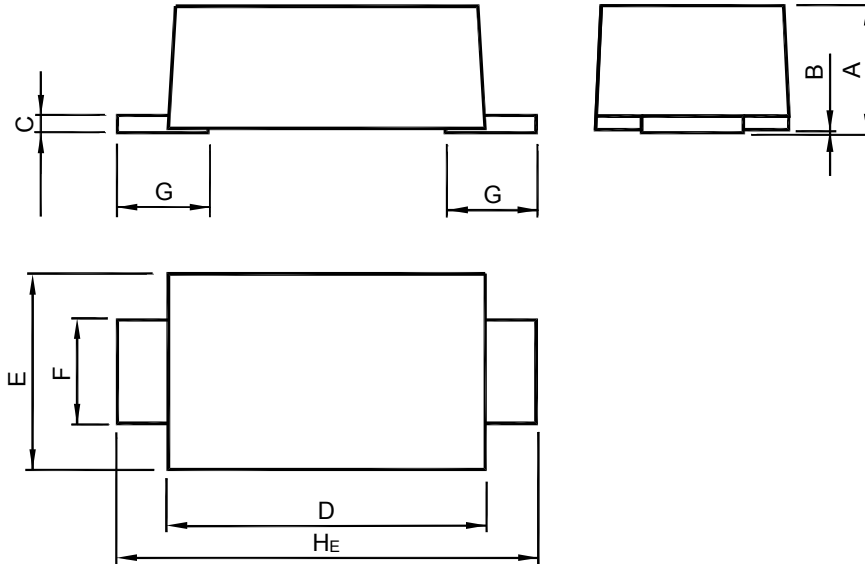

UNIT	A	B	C	D	E	F	G	H _E
mm	1.08	0.1	0.2	2.9	1.9	1.1	0.9	3.9
	0.88	0	0.1	2.6	1.7	0.8	0.7	3.5

Recommended Soldering Footprint



SOD-123FL

Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOD-123FL	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

TOP DYNAMIC

