

SDS52F THRU SDS520F-HAF

Surface Mount Schottky Barrier Rectifier


Reverse Voltage - 20 to 200 V

Forward Current - 5 A

Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- Halogen and Antimony Free(HAF), RoHS compliant

SMAF

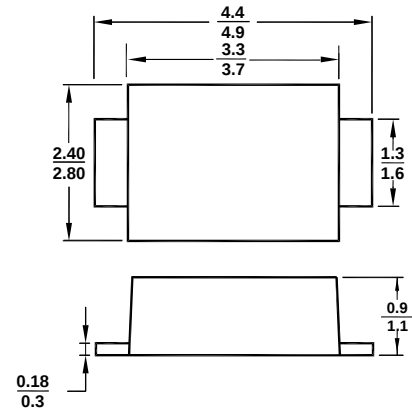

All Dimensions in mm

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	Symbols	SDS52F	SDS54F	SDS56F	SDS58F	SDS510F	SDS512F	SDS515F	SDS520F	Unit
	Marking	SS52	SS54	SS56	SS58	SS510	SS512	SS515	SS520	-
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	40	60	80	100	120	150	200	V
Maximum RMS Voltage	V _{RMS}	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	V _{DC}	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	I _{F(AV)}	5								A
Peak Forward Surge Current 8.3 ms Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	150								A
Maximum Instantaneous Forward Voltage at 5 A	V _F	0.45	0.55	0.7		0.85				V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _a = 25°C T _a = 100°C	I _R	1 50								mA
Typical Junction Capacitance ¹⁾	C _j	800		500						pF
Typical Thermal Resistance ²⁾	R _{θJA}	45								°C/W
Operating Junction Temperature Range	T _j	- 55 to + 125								°C
Storage Temperature Range	T _{stg}	- 55 to + 150								°C

¹⁾ Measured at 1MHz and applied reverse voltage of 4 V D.C.

²⁾ P.C.B. mounted with 0.5 X 0.5" (12.7 X 12.7 mm) copper pad areas.

TOP DYNAMIC

SDS52F THRU SDS520F-HAF

Fig.1 Forward Current Derating Curve

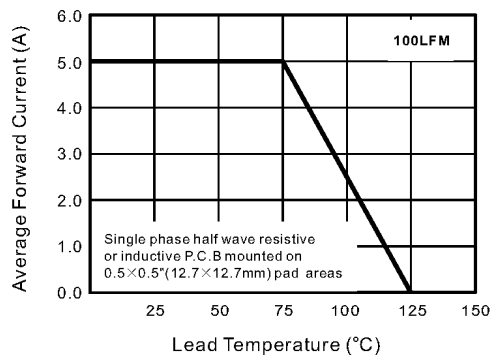


Fig.2 Typical Reverse Characteristics

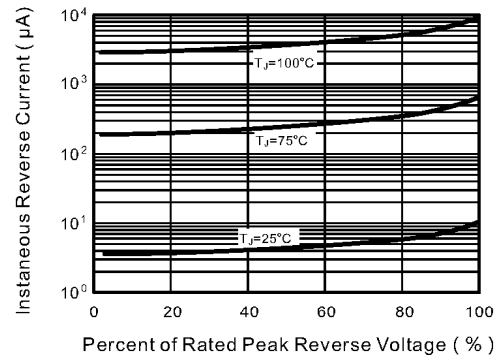


Fig.3 Typical Forward Characteristic

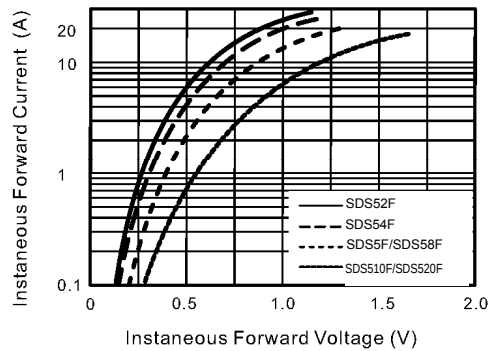


Fig.4 Typical Junction Capacitance

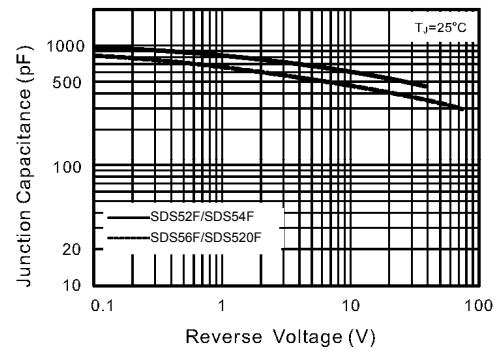


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


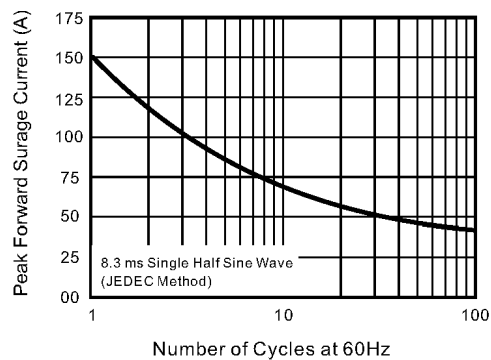


Fig.6- Typical Transient Thermal Impedance

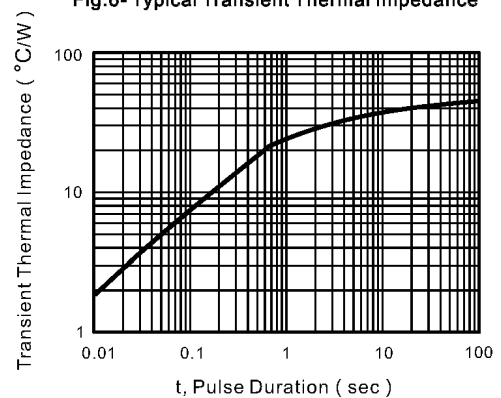

TOP DYNAMIC