

KBJ10005 THRU KBJ1010-HAF

GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

REVERSE VOLTAGE: 50 to 1000 V


FORWARD CURRENT: 10 A

Features

- Glass passivated chip junction
- Low reverse leakage current
- Low forward voltage drop
- High surge current capability
- Halogen and Antimony Free(HAF), RoHS compliant

Mechanical data

- Case: Molded plastic, 4KBJ
- Mounting Position: Any

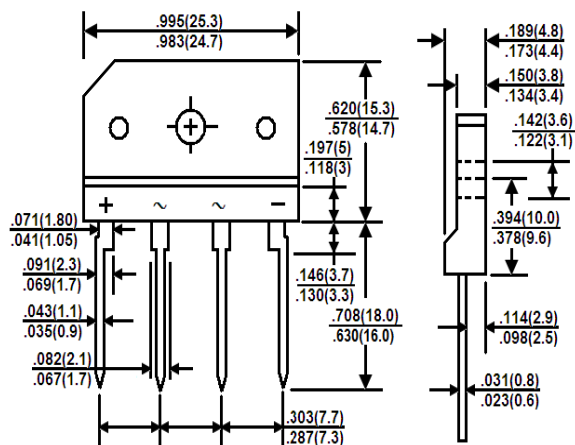

Dimensions in mm

Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	KBJ 10005	KBJ 1001	KBJ 1002	KBJ 1004	KBJ 1006	KBJ 1008	KBJ 1010	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current with Heatsink at $T_c = 100^\circ\text{C}$	$I_{(AV)}$	10							A
Peak Forward Surge Current, 8.3 ms Single Half-Sine -Wave superimposed on rated load (JEDEC Method)	I_{FSM}	170							A
Maximum Forward Voltage at 5 A DC	V_F	1							V
Maximum Reverse Current at $T_a = 25^\circ\text{C}$ at Rated DC Blocking Voltage $T_a = 100^\circ\text{C}$	I_R	5 500							μA
Typical Thermal Resistance, with heatsink	$R_{\theta JC}$	1.9							$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_J, T_{Stg}	- 55 to + 150							$^\circ\text{C}$

TOP DYNAMIC

Dated : 10/11/2016 GD Rev: 01

KBJ10005 THRU KBJ1010-HAF

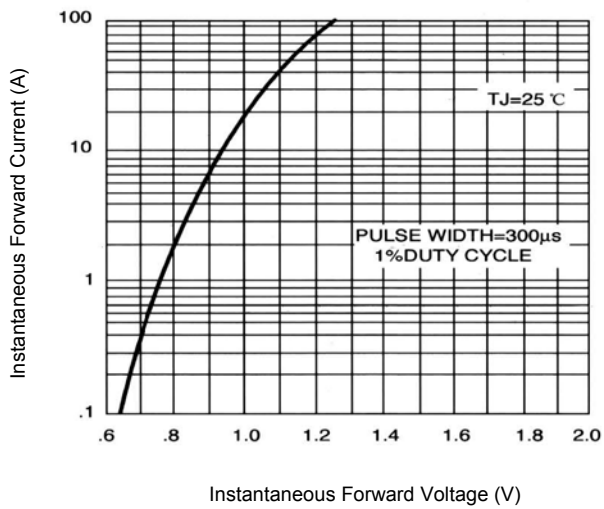


Figure 1. Typical Instantaneous Forward Characteristics Per Element

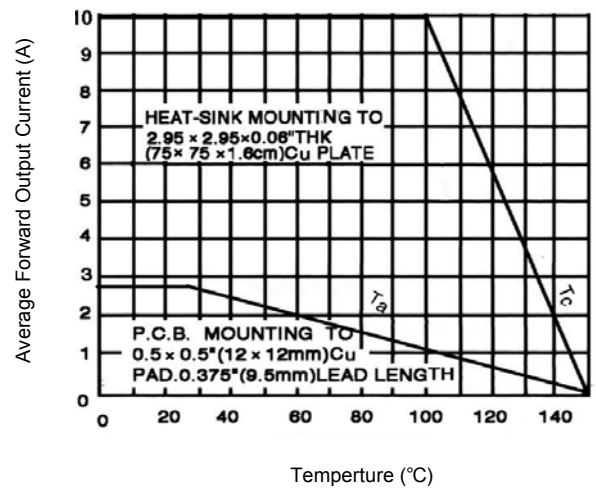


Figure 2. Forward Output Current Derating Curve

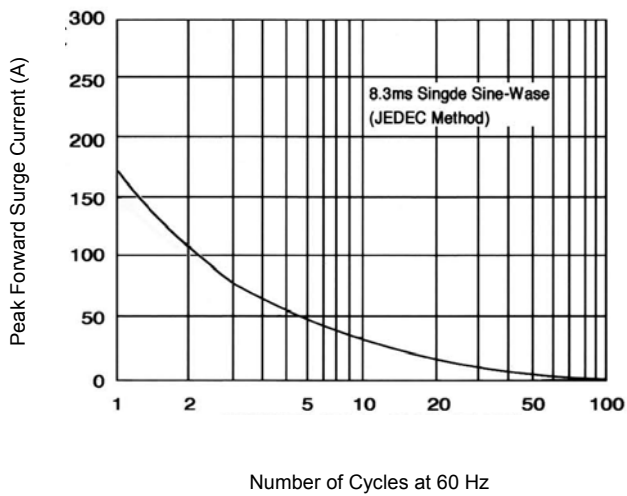


Figure 3. Maximum Non Repetitive Forward Surge Current Per Element

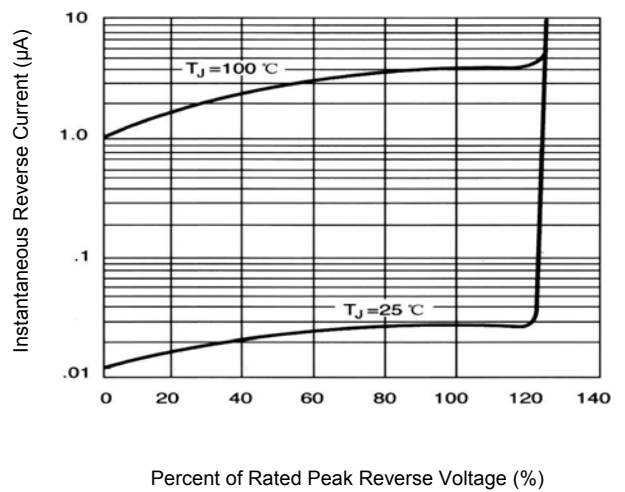


Figure 4. Typical Reverse Characteristics Per Element