

June 1992

DM54LS299/DM74LS299 8-Input Universal Shift/Storage Register with Common Parallel I/O Pins


General Description

The 'LS299 is an 8-bit universal shift/storage register with TRI-STATE® outputs. Four modes of operation are possible: hold (store), shift left, shift right and load data. The parallel load inputs and flip-flop outputs are multiplexed to reduce the total number of package pins. Separate outputs are provided for flip-flops Q0 and Q7 to allow easy cascading. A separate active LOW Master Reset is used to reset the register.

Features

- Common I/O for reduced pin count
- Four operation modes: shift left, shift right, load and store
- Separate shift right serial input and shift left serial input for easy cascading
- TRI-STATE outputs for bus oriented applications

Connection Diagram

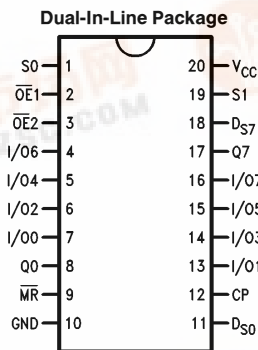

TL/F/9827-1

Order Number DM54LS299E, DM54LS299J, DM54LS299W,
DM74LS299WM or DM74LS299N
See NS Package Number E20A, J20A, M20B, N20A or W20A

Pin Names	Description
CP	Clock Pulse Input (Active Rising Edge)
D _{S0}	Serial Data Input for Right Shift
D _{S7}	Serial Data Input for Left Shift
S0, S1	Mode Select Inputs
MR	Asynchronous Master Reset Input (Active LOW)
OE1, OE2	TRI-STATE Output Enable Inputs (Active LOW)
I/O0-I/O7	Parallel Data Inputs or TRI-STATE Parallel Outputs
Q0-Q7	Serial Outputs

TRI-STATE® is a registered trademark of National Semiconductor Corporation.

DM54LS299/DM74LS299 8-Input Universal Shift/Storage Register with Common Parallel I/O Pins



Absolute Maximum Ratings (Note)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	7V
Input Voltage	7V
Operating Free Air Temperature Range	
DM54	-55°C to +125°C
DM74LS	0°C to +70°C
Storage Temperature Range	-65°C to +150°C

Note: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Recommended Operating Conditions

Symbol	Parameter	DM54LS299			DM74LS299			Units
		Min	Nom	Max	Min	Nom	Max	
V _{CC}	Supply Voltage	4.5	5	5.5	4.75	5	5.25	V
V _{IH}	High Level Input Voltage	2			2			V
V _{IL}	Low Level Input Voltage			0.7			0.8	V
I _{OH}	High Level Output Current	Q0, Q7		-0.4			-0.4	mA
		I/O0-I/O7		-2.6			-2.6	mA
I _{OL}	Low Level Output Current	Q0, Q7		4			8	mA
		I/O0-I/O7		12			24	mA
T _A	Free Air Operating Temperature	-55		125	0		70	°C
t _s (H)	Setup Time HIGH or LOW S0 or S1 to CP	24			24			ns
		24			24			
t _h (H)	Hold Time HIGH or LOW S0 or S1 to CP	5			0			ns
		5			0			
t _s (H)	Setup Time HIGH or LOW I/O _n , DS0, DS7 to CP	15			10			ns
		15			10			
t _h (H)	Hold Time HIGH or LOW I/O _n , DS0, DS7 to CP	5			0			ns
		5			0			
t _w (H)	CP Pulse Width HIGH or LOW	15			15			ns
		15			15			
t _w (L)	\overline{MR} Pulse Width LOW	15			15			ns
t _{rec}	Recovery Time \overline{MR} to CP	10			10			ns

Electrical Characteristics

Over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ (Note 1)	Max	Units
V _I	Input Clamp Voltage	V _{CC} = Min, I _I = -18 mA			-1.5	V
V _{OH}	High Level Output Voltage	V _{CC} = Min, I _{OH} = Max V _{IL} = Max	DM54	2.5		V
			DM74	2.7	3.4	
			I/O0-I/O7	2.4		
V _{OL}	Low Level Output Voltage	V _{CC} = Min, I _{OL} = Max V _{IH} = Min	DM54		0.4	V
			DM74		0.35	
			DM74		0.25	
I _I	Input Current @ Max Input Voltage	V _{CC} = Max, V _I = 10V (DM54) V _I = 7V (DM74)	Inputs		0.1	mA
			Sn		0.2	mA

Electrical Characteristics (Continued)

Over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ (Note 1)	Max	Units
I_{IH}	High Level Input Current	$V_{CC} = \text{Max}, V_I = 2.7V$	Sn		40	μA
			Inputs		20	μA
I_{IL}	Low Level Input Current	$V_{CC} = \text{Max}, V_I = 0.4V$	Sn		-0.8	mA
			Inputs		-0.4	mA
I_{OS}	Short Circuit Output Current	$V_{CC} = \text{Max}$ (Note 2)	Q_0, Q_7	-20	-100	mA
			$I/O_0-I/O_7$	-30	-130	mA
I_{CC}	Supply Current	$V_{CC} = \text{Max}, \overline{OE} = 4.5V$			60	mA
I_{OZH}	TRI-STATE Output Off Current High	$V_{CC} = \text{Max}$ $V_O = 2.7V$			40	μA
I_{OZL}	TRI-STATE Output Off Current Low	$V_{CC} = \text{Max}$ $V_O = 0.4V$			-400	μA

Note 1: All typicals are at $V_{CC} = 5V, T_A = 25^\circ C$.


Note 2: Not more than one output should be shorted at a time, and the duration should not exceed one second.

Switching Characteristics

$V_{CC} = +5.0V, T_A = +25^\circ C$ (See Section 1 for waveforms and load configurations)

Symbol	Parameter	$R_L = 2\text{ k}\Omega$ $C_L = 15\text{ pF}$		Units
		Min	Max	
f_{max}	Maximum Input Frequency	35		MHz
t_{PLH} t_{PHL}	Propagation Delay CP to Q_0 or Q_7		26 28	ns
t_{PLH} t_{PHL}	Propagation Delay CP to I/O_n		25 35	ns
t_{PHL}	Propagation Delay MR to Q_0 or Q_7		28	ns
t_{PHL}	Propagation Delay \overline{MR} to I/O_n		35	ns
t_{PZH} t_{PZL}	Output Enable Time		18 25	ns
t_{PHZ} t_{PLZ}	Output Disable Time		15 20	ns

Logic Symbol

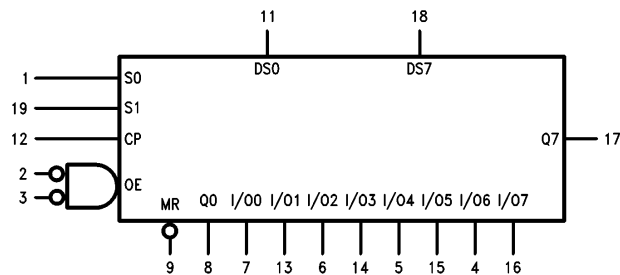

$V_{CC} = \text{Pin } 20$
 $GND = \text{Pin } 10$

TL/F/9827-2




Functional Description

The 'LS299 contains eight edge-triggered D-type flip-flops and the interstage logic necessary to perform synchronous shift left, shift right, parallel load and hold operations. The type of operation is determined by the S0 and S1, as shown in the Mode Select Table. All flip-flop outputs are brought out through TRI-STATE buffers to separate I/O pins that also serve as data inputs in the parallel load mode. Q0 and Q7 are also brought out on other pins for expansion in serial shifting of longer words.

A LOW signal on \overline{MR} overrides the Select and CP inputs and resets the flip-flops. All other state changes are initiated by the rising edge of the clock. Inputs can change when the clock is in either state provided only that the recommended setup and hold times, relative to the rising edge of CP, are observed.


A HIGH signal on either $\overline{OE1}$ or $\overline{OE2}$ disables the TRI-STATE buffers and puts the I/O pins in the high impedance state. In this condition the shift, hold, load and reset operations can still occur. The TRI-STATE buffers are also disabled by HIGH signals on both S0 and S1 in preparation for a parallel load operation.

Mode Select Table



Inputs				Response
\overline{MR}	S1	S0	CP	
L	X	X	X	Asynchronous Reset; Q0–Q7 = LOW
H	H	H		Parallel Load; I/O _n → Q _n
H	L	H		Shift Right; D _{S0} → Q0, Q0 → Q1, etc.
H	H	L		Shift Left; D _{S7} → Q7, Q7 → Q6, etc.
H	L	L	X	Hold

H = HIGH Voltage Level
 L = LOW Voltage Level
 X = Immaterial

Logic Diagram

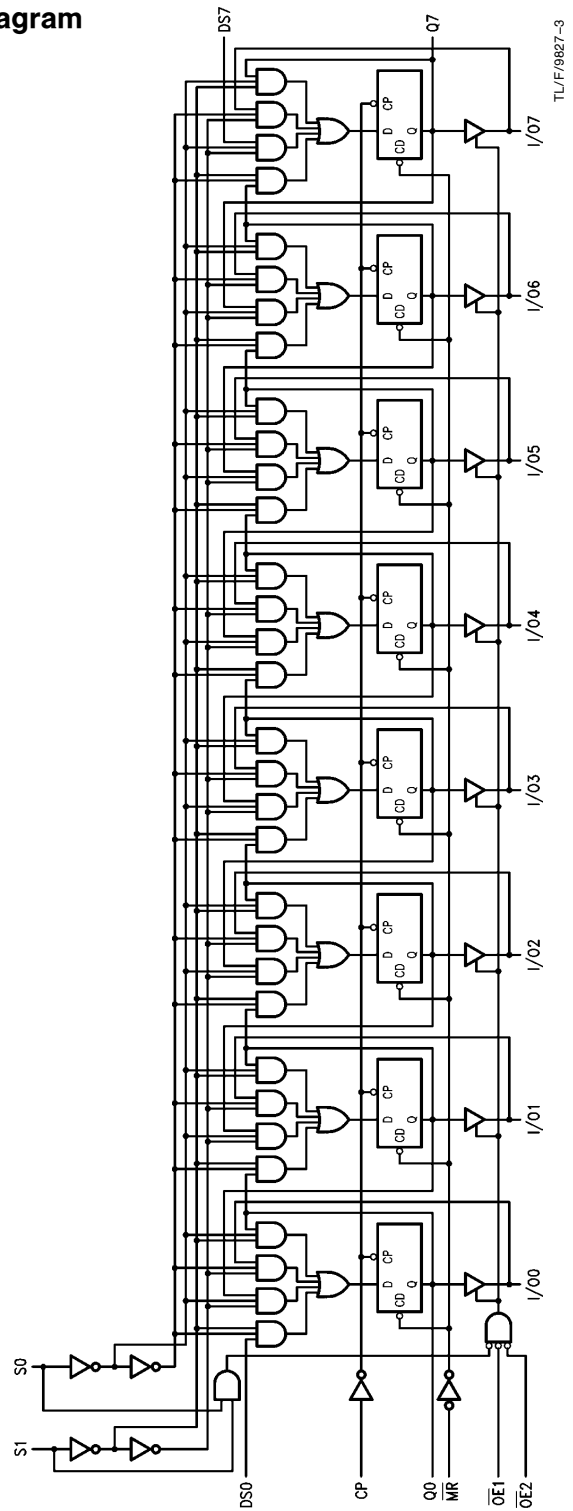


Physical Dimensions inches (millimeters)

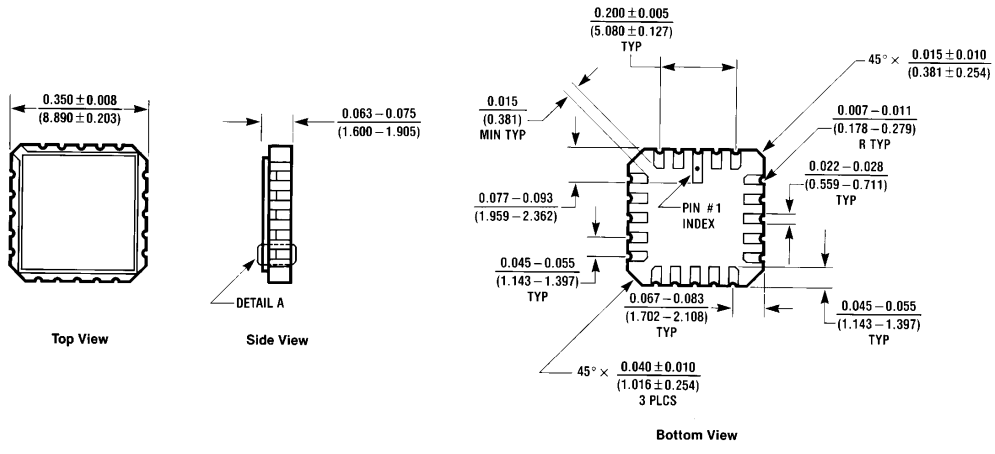

Ceramic Leadless Chip Carrier Package (E)
Order Number DM54LS299E
NS Package Number E20A


E20A (REV D)

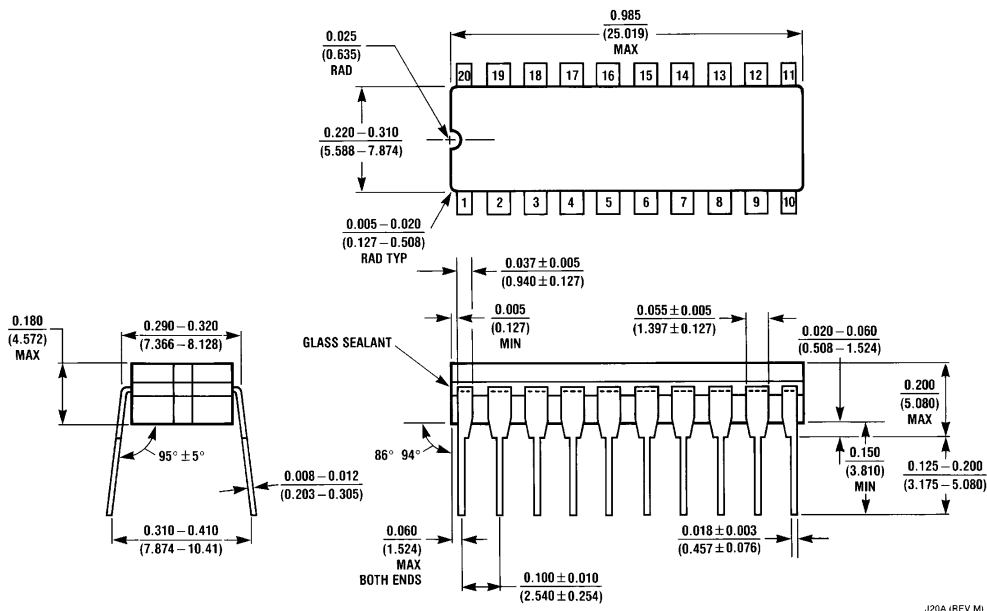


J20A (REV M)

20-Lead Ceramic Dual-In-Line Package (J)
Order Number DM54LS299J
NS Package Number J20A

Physical Dimensions inches (millimeters) (Continued)

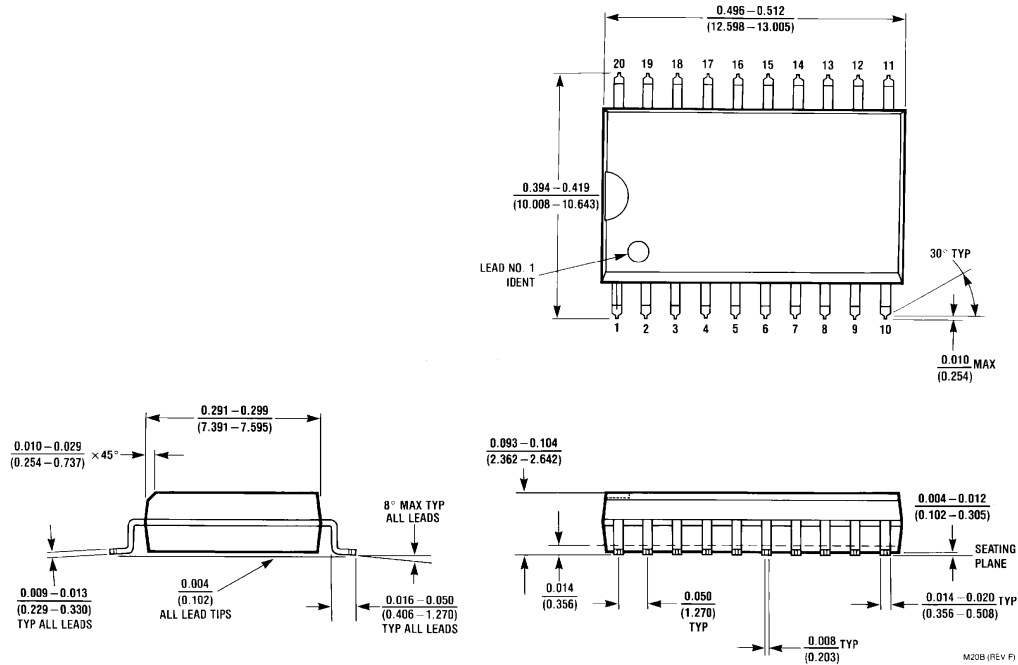


20-Lead Wide Small Outline Molded Package (M)
Order Number DM74LS299WM
NS Package Number M20B

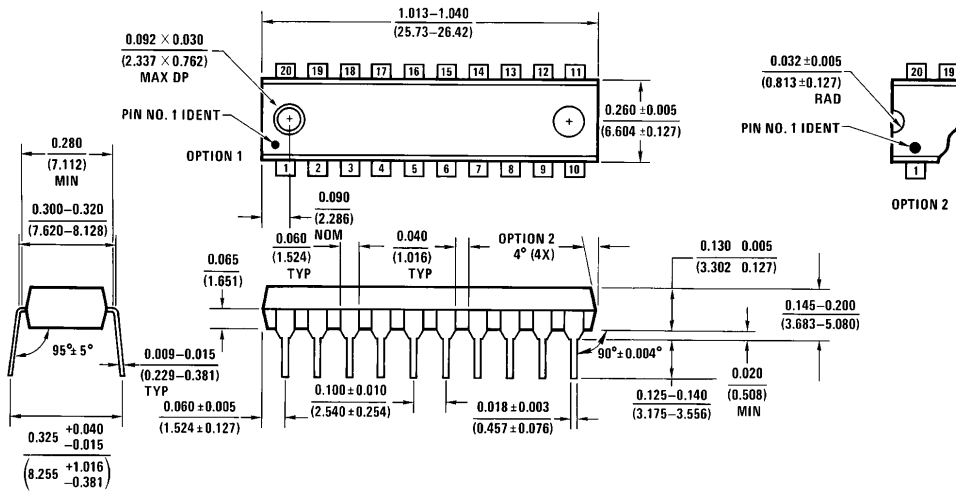

20-Lead Molded Dual-In-Line Package (N)
Order Number DM74LS299N
NS Package Number N20A

DM54LS299/DM74LS299 8-Input Universal Shift/Storage Register with Common Parallel I/O Pins

Physical Dimensions inches (millimeters) (Continued)

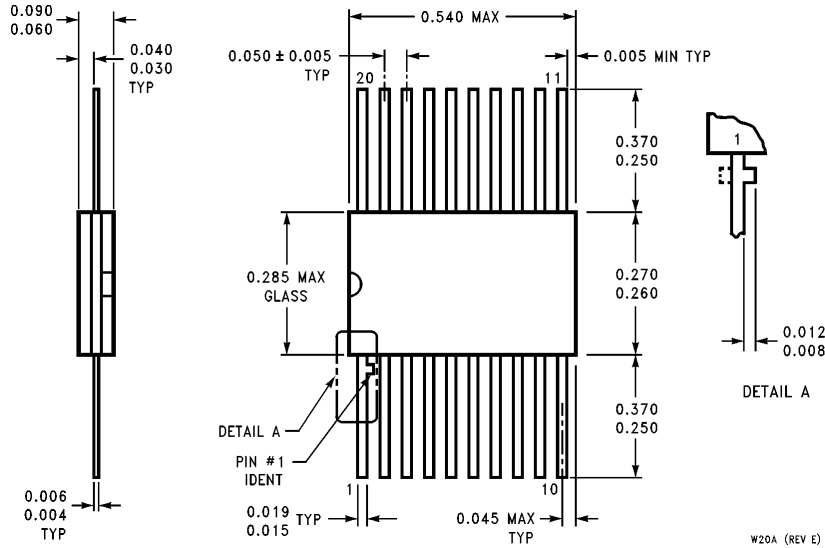

20-Lead Ceramic Flat Package (W)
Order Number DM54LS299W
NS Package Number W20A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
 1111 West Bardin Road
 Arlington, TX 76017
 Tel: 1(800) 272-9959
 Fax: 1(800) 737-7018

National Semiconductor Europe
 Fax: (+49) 0-180-530 85 86
 Email: cnjwge@tevm2.nsc.com
 Deutsch Tel: (+49) 0-180-530 85 85
 English Tel: (+49) 0-180-532 78 32
 Français Tel: (+49) 0-180-532 93 58
 Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
 13th Floor, Straight Block,
 Ocean Centre, 5 Canton Rd.
 Tsimshatsui, Kowloon
 Hong Kong
 Tel: (852) 2737-1600
 Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
 Tel: 81-043-299-2309
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.