
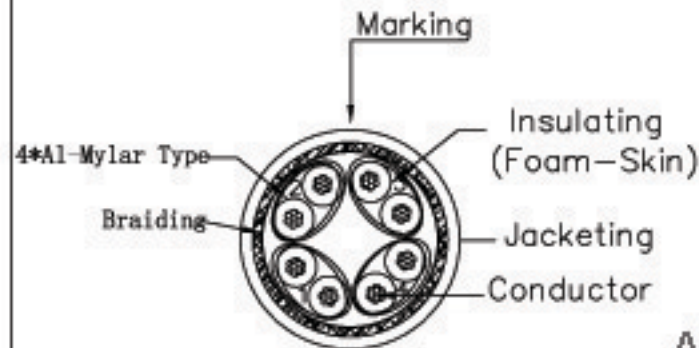
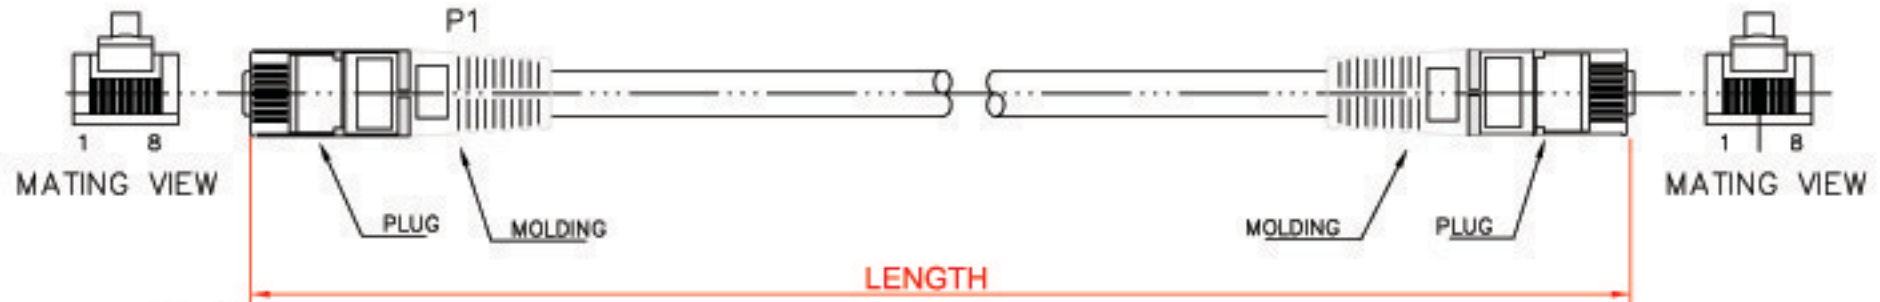


| DATE | REV | DESCRIPTION | BY | CHKD |
|------|-----|-------------|----|------|
| | | | | |
| | | | | |
| | | | | |




| | |
|------------|----------------------------------------------------------------------------------|
| Conductor | Bare Copper 25AWG 7/0.16±0.015mm |
| Insulation | Thickness:MIN at any point:0.2mm MAX AVG:0.35mm Diameter:1.00±0.06mm |
| Jacketing | PVC Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:6.1±0.2mm |

A-MCSSP600xxx/x-R

LENGTH: 0.5m - 30.0m
 0.5m - 600005
 1.0m - 600010
 X
 X
 X
 30.0m - 60300

G-GREY
 R-RED
 G-GREEN
 Y-YELLOW
 B-BLUE

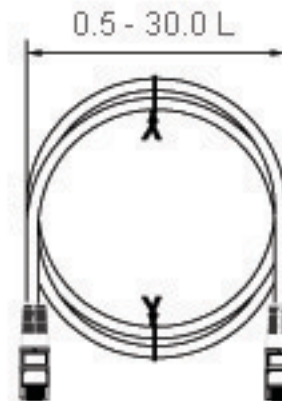

| PA/R | PINOUT | | |
|------|-----------|---------|-----------|
| | P1(T568B) | WIRE | P2(T568B) |
| 1 | 1 | WHT/ORG | 1 |
| | 2 | ORG | 2 |
| 2 | 3 | WHT/GRN | 3 |
| | 6 | GRN | 6 |
| 3 | 4 | BLU | 4 |
| | 5 | WHT/BLU | 5 |
| 4 | 7 | WHT/BRN | 7 |
| | 8 | BRN | 8 |

NOTES:


- MATERIALS:
 WIRE: CAT.6 PIMF STR
 PLUG: 8P8C 50u"
- COLOR:
 CABLE COLOR: GREY, RED, YELLOW, BLUE, GREEN
 MOLDING COLOR: GREY, RED, YELLOW, BLUE, GREEN
- LENGTH: 0.5M - 30.0M

RoHS Compliant

Unless specified on the drawing, tolerances are per the follows:

.X ± 1
 .XX ± 0.2
 .XX ± 0.05

3RD



ASSMANN
 Electronic Components

| | | | | |
|------------|--------|----------|------------------|-----------------|
| DRAW.NO | YUS-06 | ITEM | A-MCSSP60xxx/x-R | |
| DEPARTMENT | R&D | DRAW | SWH | DATE 2006/10/27 |
| SCALE | | CHECKER | | DATE |
| UNIT | MM | APPROVAL | | DATE |