

MA3D799

Silicon epitaxial planar type (cathode common)

For switching power supply


Features

- TO-220D package
- Allowing to rectify under ($I_{F(AV)} = 10\text{ A}$) condition
- Cathode common dual type
- Low V_F (forward voltage) type: $V_F < 0.47\text{ V}$ (at $I_F = 5\text{ A}$)

Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}	30	V
Average forward current	$I_{F(AV)}$	10	A
Non-repetitive peak forward surge current*	I_{FSM}	120	A
Junction temperature	T_j	-40 to +125	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 to +125	$^\circ\text{C}$

Note) * : Half sine-wave; 10 ms/cycle

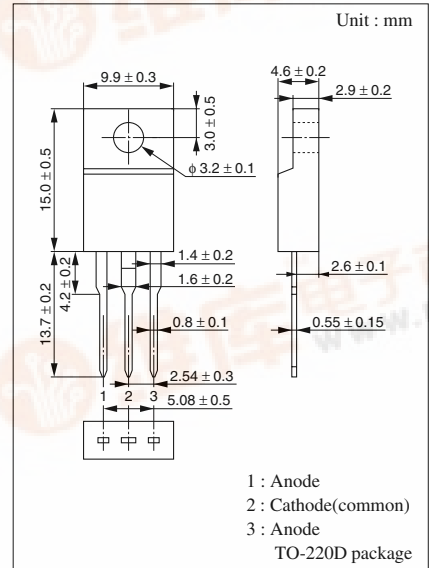

Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse current (DC)	I_R	$V_R = 30\text{ V}$			3	mA
Forward voltage (DC)	V_F	$I_F = 5\text{ A}$			0.47	V
High voltage rectification	$R_{th(j-c)}$	Direct current (between junction and case)			3	$^\circ\text{C/W}$

Note) Rated input/output frequency: 150 MHz

