



COUGAR COMPONENTS

rev. 10/00

AC1008 5 TO 1000 MHz TO-8 CASCADABLE AMPLIFIER

Typical Values

	AC1008
Medium Output Power	+18.5 dBm
Medium Gain	+16.2 dB
High Third Order I.P.	+33.0 dBm
High Performance Thin Film	
Standard Size TO-8	

SPECIFICATIONS*

Parameter	Typical	Guaranteed	
		0 to 50° C	-55 to +85° C
Frequency (Min.)	5-1000 MHz	5-1000 MHz	5-1000 MHz
Small Signal Gain (Min.)	15.5 dB	14.8 dB	14.3 dB
Gain Flatness (Max.)	±0.2 dB	±0.4 dB	±0.5 dB
Noise Figure (Max.)	4.5 dB	5.5 dB	6.0 dB
SWR (Max.)	Input/Output 5-10 MHz 10-1000 MHz	1.8:1 1.7:1	1.9:1 1.8:1
Power Output (Min.) @ 1dB comp.	+18.5 dBm	+18.0 dBm	+17.5 dBm
DC Current (Max.)	85 mA	88.0 mA	93.0 mA

* Measured in a 50-ohm system at +15 Vdc unless otherwise specified.

INTERMODULATION PERFORMANCE

Typical @ 25° C	+12 Volts	+15 Volts
Second Order Harmonic Intercept Point	+44 dBm	+50 dBm
Second Order Two Tone Intercept Point	+38 dBm	+44 dBm
Third Order Two Tone Intercept Point	+26 dBm	+33 dBm


ABSOLUTE MAXIMUM RATINGS

Storage Temperature	-62 to 125° C
Maximum Case Temperature	+125° C
Maximum DC Voltage	+17 Volts
Maximum Continuous RF Input Power	+13 dBm
Maximum Short Term Input Power (1 Minute Max.)	100 Milliwatts
Maximum Peak Power (3 µsec Max.)	0.5 Watt
Burn-in Temperature	+105° C
Thermal Resistance ¹ (θjc)	+32° C/Watt
Junction Temperature Rise Above Case (Tjc)	+44.2° C

¹ Thermal resistance is based on total power dissipation.


AC1008

TO-8 Package for Amplifiers

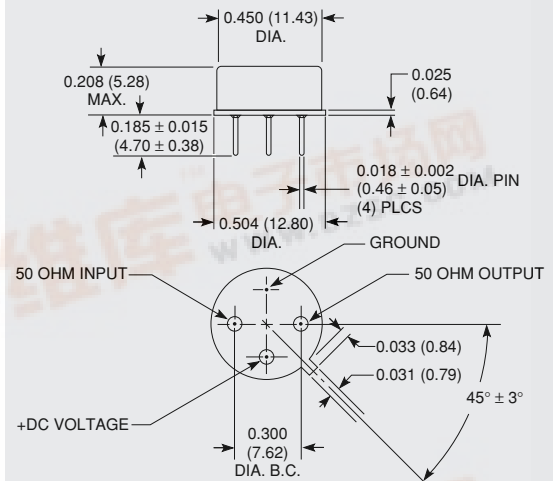

AS1008






SMT0-8 Package for Amplifiers

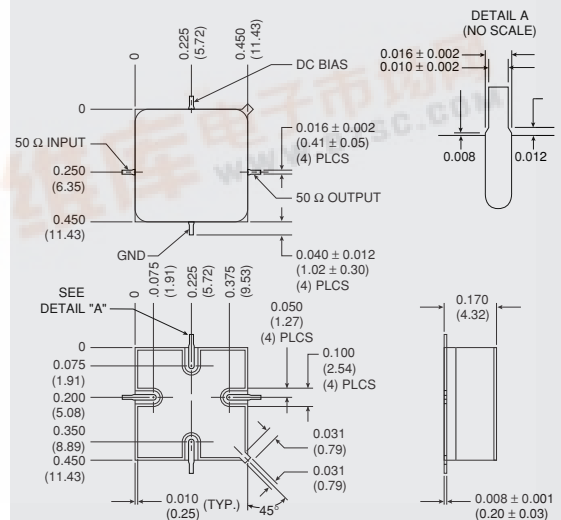

DIMENSIONS ARE IN INCHES (MILLIMETERS)



TYPICAL PERFORMANCE

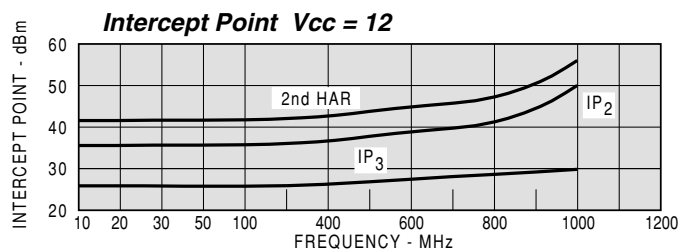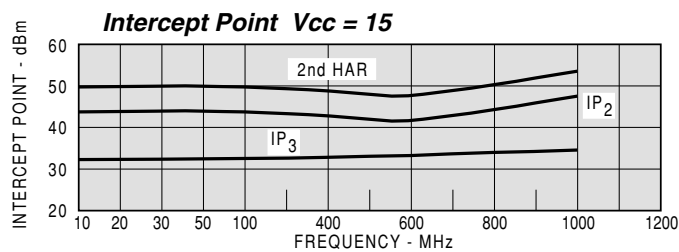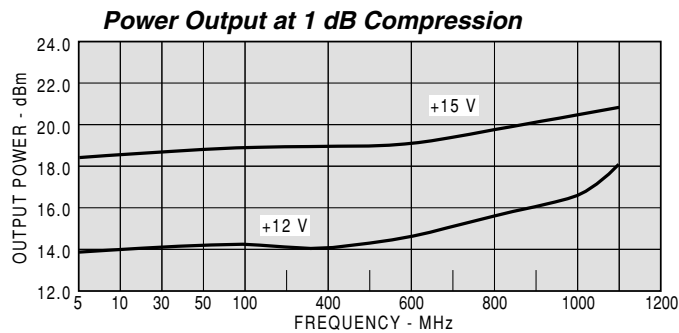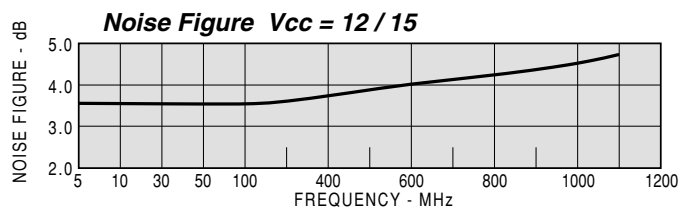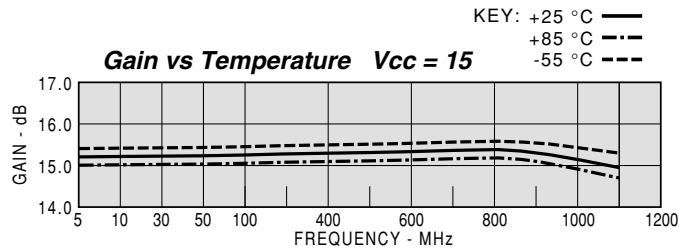

TYPICAL AUTOMATIC TEST DATA

Model: AC1008		$V_{CC}=+15V$				$I_{CC}=83.96$
FREQ	SWR	SWR	GAIN	PHASE	DELAY	REV/ISO
MHZ	IN	OUT	DB	DEG	NSEC	DB
5	1.53	1.52	15.09	-154		-20.2
10	1.26	1.36	15.30	-168		-19.9
30	1.15	1.29	15.46	-180	1.60	-19.8
50	1.14	1.27	15.49	176	0.69	-19.7
100	1.13	1.26	15.48	167	0.50	-19.6
200	1.14	1.27	15.42	151	0.43	-19.7
300	1.17	1.28	15.37	136	0.41	-19.7
400	1.20	1.28	15.36	122	0.40	-19.6
500	1.23	1.27	15.38	107	0.41	-19.5
600	1.26	1.25	15.37	92	0.42	-19.4
700	1.29	1.23	15.38	77	0.43	-19.3
800	1.30	1.21	15.35	61	0.43	-19.2
900	1.31	1.22	15.26	45	0.45	-19.0
1000	1.32	1.26	15.10	29	0.45	-18.9
1100	1.33	1.35	14.89	12	0.46	-18.8

Model: AC1008		$V_{CC}=+15V$				$I_{CC}=83.96$
FREQ.	S11	S21	S12	S22		
MHz	MAG	ANG	MAG	ANG	MAG	ANG
5	0.21	-97.5	5.68	-154.4	0.098	28.9
10	0.11	-110.4	5.82	-168.0	0.101	14.4
30	0.07	-140.0	5.93	-179.5	0.103	3.5
50	0.06	-152.5	5.95	175.5	0.104	0.2
100	0.06	-163.6	5.94	166.5	0.104	-4.7
200	0.07	-167.3	5.90	151.2	0.103	-11.8
300	0.08	-171.0	5.87	136.4	0.104	-17.7
400	0.09	-179.7	5.86	121.9	0.104	-24.1
500	0.10	-168.1	5.87	107.2	0.106	-30.1
600	0.12	-155.0	5.87	92.10	0.107	-36.6
700	0.13	-140.9	5.87	76.80	0.109	-43.3
800	0.13	-125.6	5.85	61.10	0.110	-50.5
900	0.14	-107.7	5.79	45.00	0.112	-58.2
1000	0.14	-88.70	5.69	28.70	0.113	-65.2
1100	0.14	-69.90	5.56	12.30	0.114	-73.1
1200	0.15	-53.60	5.36	-4.40	0.116	-80.5

Model: AC1008		$V_{CC}=+12V$				$I_{CC}=66.48$
FREQ	SWR	SWR	GAIN	PHASE	DELAY	REV/ISO
MHZ	IN	OUT	DB	DEG	NSEC	DB
5	1.50	1.44	14.86	-155		-19.9
10	1.23	1.30	15.03	-168		-19.7
30	1.12	1.23	15.19	-180	1.60	-19.4
50	1.10	1.21	15.22	175	0.69	-19.4
100	1.10	1.20	15.21	166	0.50	-19.4
200	1.13	1.21	15.14	151	0.43	-19.5
300	1.17	1.21	15.09	136	0.41	-19.5
400	1.21	1.22	15.07	121	0.41	-19.4
500	1.25	1.21	15.07	106	0.42	-19.3
600	1.29	1.21	15.06	91	0.42	-19.1
700	1.32	1.21	15.02	76	0.43	-19.0
800	1.35	1.24	14.97	60	0.44	-18.9
900	1.36	1.29	14.84	44	0.45	-18.7
1000	1.37	1.37	14.64	28	0.45	-18.6
1100	1.38	1.48	14.41	11	0.45	-18.5

Model: AC1008		$V_{CC}=+12V$				$I_{CC}=66.48$
FREQ.	S11	S21	S12	S22		
MHz	MAG	ANG	MAG	ANG	MAG	ANG
5	0.20	-93.0	5.53	-154.7	0.101	28.6
10	0.10	-101.2	5.64	-168.1	0.103	14.3
30	0.05	-125.8	5.75	-179.6	0.106	3.5
50	0.05	-138.2	5.77	175.4	0.107	0.1
100	0.05	-148.8	5.76	166.4	0.107	-4.6
200	0.06	-149.0	5.72	150.8	0.106	-11.6
300	0.08	-155.3	5.68	135.9	0.106	-17.5
400	0.10	-167.0	5.67	121.3	0.108	-23.8
500	0.11	-179.5	5.67	106.3	0.109	-30.0
600	0.13	-164.7	5.66	91.1	0.110	-36.4
700	0.14	-149.4	5.64	75.6	0.112	-43.1
800	0.15	-133.2	5.60	59.9	0.113	-50.4
900	0.15	-115.2	5.52	43.7	0.116	-57.8
1000	0.16	-95.9	5.39	27.5	0.117	-65.2
1100	0.16	-76.7	5.25	11.2	0.119	-72.9
1200	0.17	-59.6	5.05	-5.4	0.121	-80.5